

## ANNEX A: ECV REQUIREMENTS

This Annex presents the requirements for the ECV products for all ECVs detailed in this Implementation plan.

For each ECV product, defined as the measurable parameter needed to characterize the ECV, a definition and units are provided together with the requirements.

The requirements are expressed in terms of five criteria:

1. Spatial Resolution - horizontal and vertical (if needed)
2. Temporal resolution (or frequency) – the frequency of observations e.g. hourly, daily or annual
3. Measurement Uncertainty – the parameter, associated with the result of a measurement, that characterizes the dispersion of the values that could reasonably be attributed to the measurand (GUM)<sup>1</sup>. It includes all contributions to the uncertainty, expressed in units of 2 standard deviations
4. Stability – The change in bias over time. Stability is quoted per decade.
5. Timeliness - The time expectation for accessibility and availability of data.

In this Implementation Plan, for each of these criteria, a goal, breakthrough and threshold value is presented. These are defined as:

- Goal (G): an ideal requirement above which further improvements are not necessary.
- Breakthrough (B): an intermediate level between threshold and goal which, if achieved, would result in a significant improvement for the targeted application. The breakthrough value may also indicate the level at which specified uses within climate monitoring become possible. It may be appropriate to have different breakthrough values for different uses.
- Threshold (T): the minimum requirement to be met to ensure that data are useful.

---

<sup>1</sup> [https://www.bipm.org/documents/20126/2071204/JCGM\\_100\\_2008\\_E.pdf/cb0ef43f-baa5-11cf-3f85-4dcd86f77bd6](https://www.bipm.org/documents/20126/2071204/JCGM_100_2008_E.pdf/cb0ef43f-baa5-11cf-3f85-4dcd86f77bd6)

## TABLE OF CONTENTS

A1. Atmospheric ECVs.....	9
1. Surface .....	10
1.1 ECV: Air Pressure .....	10
1.1.1 ECV product: Atmospheric Pressure (near surface) .....	10
1.2 ECV: Surface Temperature.....	11
1.2.1 ECV Product: Atmospheric Temperature near Surface .....	11
1.3 ECV: Surface Wind Speed and Direction .....	13
1.3.1 ECV Product: Wind Direction (near surface) .....	13
1.3.2 ECV Product: Wind Speed near Surface .....	14
1.3.3 EC Product: Wind Vector (near Surface) .....	15
1.4 ECV: Surface Water Vapour .....	16
1.4.1 ECV Product: Dew Point Temperature near Surface.....	16
1.4.2 ECV Product: Relative Humidity near Surface .....	17
1.4.3 ECV Product: Air Specific Humidity near Surface.....	18
1.5 ECV: Precipitation.....	19
1.5.1 ECV Product: Accumulated Precipitation .....	19
1.6 ECV: Surface radiation budget.....	20
1.6.1 Upward Long-Wave Irradiance at Earth Surface.....	20
1.6.2 ECV Product: Downward Long-Wave Irradiance at Earth Surface .....	21
1.6.3 ECV Product: Downward Short-Wave Irradiance at Earth Surface .....	22
2. Upper Air .....	23
2.1 ECV: Upper-air temperature.....	23
2.1.1 ECV Product: Atmospheric Temperature in the Boundary Layer .....	23
2.1.2 ECV Product: Atmospheric Temperature in the Free Troposphere.....	25
2.1.3 ECV Product: Atmospheric Temperature in the Upper Troposphere and Lower Stratosphere.....	27
2.1.4 ECV Product: Atmospheric Temperature in the Middle and Upper Stratosphere .....	29
2.1.5 ECV Product: Atmospheric Temperature in the Mesosphere.....	31
2.2 ECV: Upper-air wind speed and direction .....	33
2.2.1 ECV Product: Wind (horizontal) in the Boundary Layer .....	33
2.2.2 ECV Product: Wind (horizontal) in the Free Troposphere.....	35
2.2.3 ECV Product: Wind (horizontal) in the Upper Troposphere and Lower Stratosphere ..	37
2.2.4 ECV Product: Wind (horizontal) in the Middle and Upper Stratosphere .....	39
2.2.5 ECV Product: Wind (horizontal) in the Mesosphere.....	41
2.2.6 ECV Product: Wind (vertical) in the Boundary Layer .....	43
2.2.7 ECV Product: Wind (vertical) in the Free Troposphere .....	45
2.2.8 ECV Product: Wind (vertical) in the Upper Troposphere and Lower Stratosphere.....	47
2.2.9 ECV Product: Wind (vertical) In the Middle and Upper Stratosphere .....	49
2.2.10 ECV Product: Wind (vertical) in the Mesosphere .....	50

2.2.11	Figures .....	51
2.3	ECV: Upper-air water vapour .....	56
2.3.1	ECV Product: Water Vapour Mixing Ratio in the Upper Troposphere and Lower Stratosphere .....	56
2.3.2	ECV Product: Water Vapour Mixing Ratio in the Middle and Upper Stratosphere .....	57
2.3.3	ECV Product: Water Vapour Mixing Ratio in the Mesosphere .....	58
2.3.4	ECV Product: Relative Humidity in the Boundary Layer .....	59
2.3.5	ECV Product: Relative Humidity in the Free Troposphere .....	60
2.3.6	ECV Product: Relative Humidity in the Upper Troposphere and Lower Stratosphere ..	61
2.3.7	ECV Product: Specific Humidity in the Boundary Layer .....	62
2.3.8	ECV Product: Specific Humidity in the Free Troposphere .....	63
2.3.9	ECV Product: Integrated Water Vapour .....	64
2.3.10	ECV Product: Snow Thickness .....	65
2.3.11	ECV Product: Area Covered by Snow .....	66
2.4	ECV: Earth radiation budget .....	67
2.4.1	ECV Product: Radiation Profile .....	67
2.4.2	ECV Product: Solar Spectral Irradiance .....	68
2.4.3	ECV Product: Downward Short-Wave Irradiance at Top of the Atmosphere .....	69
2.4.4	ECV Product: Upward Short-Wave Irradiance at Top of the Atmosphere .....	70
2.4.5	ECV Product: Upward Long-Wave Irradiance at Top of the Atmosphere .....	71
2.5	ECV Cloud Properties .....	72
2.5.1	ECV Product: Cloud cover .....	72
2.5.2	ECV Product: Cloud Liquid Water Path .....	73
2.5.3	ECV Product: Cloud Ice Water Path .....	74
2.5.4	ECV Product: Cloud Drop Effective Radius .....	75
2.5.5	ECV Product: Cloud Optical Depth .....	76
2.5.6	ECV Product: Cloud Top Temperature .....	77
2.5.7	ECV Product: Cloud Top Height .....	78
2.6	ECV: Lightning .....	79
2.6.1	ECV Product: Schumann Resonances .....	79
2.6.2	ECV Product: Total lightning stroke density .....	80
3.	Atmospheric Composition .....	81
3.1	Greenhouse Gases .....	81
3.1.1	ECV Product: N <sub>2</sub> O mole fraction .....	81
3.1.2	ECV Product: CO <sub>2</sub> mole fraction .....	82
3.1.3	ECV Product: CO <sub>2</sub> column average dry air mixing ratio .....	83
3.1.4	ECV Product: CH <sub>4</sub> mole fraction .....	84
3.1.5	ECV Product: CH <sub>4</sub> column average dry air mixing ratio .....	85
3.2	ECV: Ozone .....	86
3.2.1	ECV Product: Ozone mole fraction in the Troposphere .....	86
3.2.2	ECV Product: : Ozone mole fraction in the Upper Troposphere/ Lower Stratosphere (UTLS) .....	88

3.2.3	ECV Product: Ozone mole fraction in the Middle and Upper Stratosphere .....	89
3.2.4	ECV Product: Ozone Tropospheric Column .....	90
3.2.5	ECV Product: Ozone Stratospheric Column.....	91
3.2.6	ECV Product: Ozone Total Column .....	92
3.3	ECV: Precursors (Supporting the aerosol and ozone ECVs).....	93
3.3.1	ECV Product: CO Tropospheric Column .....	93
3.3.2	ECV Product: CO Mole fraction .....	94
3.3.3	ECV Product: HCHO Tropospheric Column.....	95
3.3.4	ECV Product: SO <sub>2</sub> Tropospheric Column .....	96
3.3.5	ECV product: SO <sub>2</sub> stratospheric column .....	97
3.3.6	ECV Product: NO <sub>2</sub> Tropospheric Column .....	98
3.3.7	ECV Product: NO <sub>2</sub> mole fraction .....	99
3.4	ECV: Aerosols Properties .....	100
3.4.1	ECV Product: Aerosol light extinction vertical profile (Troposphere).....	100
3.4.2	ECV Product: Aerosol light extinction vertical profile (stratosphere).....	102
3.4.3	ECV Product: Multi-wavelength Aerosol Optical Depth .....	104
3.4.4	ECV product: Chemical Composition of Aerosol Particles.....	106
3.4.5	ECV Product: Number of Cloud Condensation Nuclei.....	107
3.4.6	ECV Product: Aerosol Number Size Distribution .....	108
3.4.7	ECV Product: Aerosol Single Scattering Albedo .....	110
A2.	Ocean ECVs .....	111
4.	Physics.....	112
4.1	Sea-surface temperature .....	112
4.1.1	ECV Product: Sea-surface temperature.....	112
4.2	Subsurface temperature .....	113
4.2.1	ECV Product: Interior temperature.....	113
1.	Sea-surface salinity .....	115
4.2.2	ECV Product: Sea-surface salinity .....	115
4.3	Subsurface salinity.....	116
4.3.1	ECV Product: Interior salinity .....	116
4.4	Surface currents .....	117
4.4.1	ECV Product: Ekman currents.....	117
4.4.2	ECV Product: Surface geostrophic current.....	118
4.5	Subsurface currents .....	119
4.5.1	ECV Product: Vertical mixing.....	119
4.6	Sea level .....	120
4.6.1	ECV Product: Regional mean sea level.....	120
4.6.2	ECV Product: Global mean sea level.....	121
4.7	Sea state .....	122
4.7.1	ECV Product: Wave height .....	122
4.8	Surface stress .....	123

4.8.1	ECV Product: Surface stress.....	123
4.9	Ocean surface heat flux .....	124
4.9.1	ECV Product: Radiative heat flux .....	124
4.9.2	ECV Product: Sensible heat flux.....	125
4.9.3	ECV Product: Latent heat flux .....	126
4.10	Sea ice.....	127
4.10.1	ECV Product: Sea Ice concentration .....	127
4.10.2	ECV Product: Sea ice thickness.....	128
4.10.3	ECV Product: Sea ice drift.....	130
4.10.4	ECV Product: Sea ice age .....	131
4.10.5	ECV Product: Sea ice temperature .....	133
4.10.6	ECV Product: Sea ice surface albedo .....	133
4.10.7	ECV Product: Snow depth on sea ice .....	136
5.	Biogeochemistry .....	138
5.1	Oxygen .....	138
5.1.1	ECV Product: Dissolved oxygen concentration .....	138
5.2	Nutrients .....	139
5.2.1	ECV Product: Silicate.....	139
5.2.2	ECV Product: Phosphate .....	140
5.2.3	ECV Product: Nitrate .....	141
5.3	Ocean inorganic carbon .....	142
5.3.1	ECV Product: Total alkalinity (TA) .....	142
5.3.2	Dissolved inorganic carbon (DIC) .....	143
5.3.3	ECV Product: pCO <sub>2</sub> .....	144
5.4	Transient tracers .....	145
5.4.1	ECV Product: <sup>14</sup> C .....	145
5.4.2	ECV Product: SF <sub>6</sub> .....	146
5.4.3	ECV Product: CFC-11 .....	147
5.4.4	ECV Product: CFC-12 .....	148
5.5	Ocean nitrous oxide N <sub>2</sub> O.....	149
5.5.1	ECV Product: Nitrous oxide N <sub>2</sub> O.....	149
5.5.2	ECV Product: N <sub>2</sub> O air-sea flux .....	150
5.6	Ocean colour .....	151
5.6.1	ECV Product: Water leaving radiance .....	151
5.6.2	ECV Product: Water leaving radiance .....	152
6.	Biosphere .....	153
6.1	Plankton .....	153
6.1.1	ECV Product: Zooplankton diversity .....	153
6.1.2	ECV Product: Zooplankton biomass.....	154
6.1.3	ECV Product: Phytoplankton diversity.....	155
6.1.4	ECV Product: Chlorophyll-a concentration .....	156

6.1.5	ECV Product: Phytoplankton biomass .....	157
6.2	Marine habitat properties.....	158
6.2.1	Mangrove cover and composition .....	158
6.2.2	Seagrass cover (areal extent) .....	159
6.2.3	Macroalgal canopy cover and composition.....	160
6.2.4	Hard coral cover and composition .....	161
A3.	Terrestrial ECVs.....	162
7.	Hydrology.....	163
7.1	Groundwater .....	163
7.1.1	ECV Product: Groundwater Storage Change .....	163
7.1.2	ECV Product: Groundwater Level .....	165
7.2	Lakes .....	167
7.2.1	ECV Product: Lake Ice Cover (LIC).....	167
7.2.2	ECV Product: Lake ice thickness (LIT) .....	168
7.2.3	ECV Product: Lake Water Leaving Reflectance .....	169
7.2.4	ECV Product: Lake surface water temperature (LSWT) .....	170
7.2.5	ECV Product: Lake Water Extent (LWE) .....	171
7.2.6	ECV Product: Lake Water Level .....	172
7.3	River Discharge .....	173
7.3.1	ECV Product: Water level.....	173
7.3.2	ECV Product: River Discharge.....	174
7.4	Soil moisture.....	175
7.4.1	ECV Product: Freeze/thaw .....	175
7.4.2	ECV Product: Surface Inundation .....	176
7.4.3	ECV Product: Root zone soil moisture.....	177
7.4.4	ECV Product: Surface soil moisture .....	179
7.5	ECV: Terrestrial Water Storage (TWS).....	181
7.5.1	ECV Product: TWS Anomaly .....	181
8.	Cryosphere .....	182
8.1	Glaciers .....	182
8.1.1	ECV Product: Glacier Ice Thickness .....	182
8.1.2	ECV Product: Glacier Mass Change.....	183
8.1.3	ECV Product: Glacier Elevation Change.....	184
8.1.4	ECV Product: Glacier Area.....	186
8.2	Ice sheets and ice shelves .....	187
8.2.1	ECV Product: Grounding Line Location and Thickness .....	187
8.2.2	ECV Product: Ice Volume Change .....	188
8.2.3	ECV Product: Ice Velocity .....	189
8.2.4	ECV Product: Surface Elevation Change.....	190
8.3	Permafrost.....	191
8.3.1	ECV Product: Permafrost extent .....	191

8.3.2	ECV Product: Permafrost Temperature (= PT) .....	192
8.3.3	ECV Product: Active Layer Thickness (= ALT) .....	194
8.3.4	ECV Product: Rock Glacier Velocity [=RGV].....	196
8.4	Snow .....	198
8.4.1	ECV Product: Snow-water equivalent .....	198
8.4.2	ECV Product: Snow Depth.....	199
8.4.3	ECV Product: Area Covered by Snow .....	200
9.	Biosphere .....	201
9.1	Above-ground biomass .....	201
9.1.1	ECV Product: Above-ground biomass .....	201
9.2	Albedo .....	203
9.2.1	ECV Product: Spectral and Broadband (visible, near infrared and shortwave) DH & BH with associated spectral Bidirectional Reflectance Distribution Function (BRDF) parameters (required to derived albedo from reflectances). .....	203
9.3	Evaporation from Land .....	205
9.3.1	ECV Product: Transpiration .....	205
9.3.2	ECV Product: Interception Loss .....	207
9.3.3	ECV Product: Bare Soil Evaporation .....	209
9.3.4	ECV Product: Sensible Heat Flux.....	211
9.3.5	ECV Product: Latent Heat Flux.....	212
9.4	Fire.....	214
9.4.1	ECV Product: Burned area .....	214
9.4.2	ECV Product: Active Fires .....	216
9.4.3	ECV Product: Combustion completeness (CC) / also termed Burning efficiency (BE) .....	218
9.4.4	ECV Product: Fire Radiative Power (FRP) .....	220
9.5	Fraction of absorbed photosynthetically active radiation (FAPAR) .....	222
9.5.1	ECV Product: Fraction of Absorbed Photosynthetically Active Radiation.....	222
9.6	Land cover.....	224
9.6.1	ECV Product: Maps of key IPCC land classes, related changes and land management types .....	224
9.6.2	ECV Product: Maps of High-Resolution Land Cover.....	226
9.6.3	ECV Product: Land Cover.....	228
9.7	Land Temperature .....	230
9.7.1	ECV Product: Land Surface Temperature (LST).....	230
9.8	Soil Temperature.....	232
9.8.1	ECV Product: Soil Temperature .....	232
9.9	Leaf Area Index.....	234
9.9.1	ECV Product: Leaf Area Index .....	234
9.10	Soil carbon .....	236
9.10.1	ECV Product: Peatlands total depth of profile, area and location .....	236
9.10.2	ECV Product: Mineral soil bulk density to 30 cms and 1m .....	237
9.10.3	ECV Product: Carbon in Soil .....	238

10.	Anthropogenic .....	239
10.1	Anthropogenic Greenhouse Gas fluxes.....	239
10.1.1	ECV Product: High-resolution footprint around point sources.....	239
10.1.2	ECV Product: Total Estimated fluxes by coupled data assimilation/ models with observed atmospheric – national .....	240
10.1.3	ECV Product: Total Estimated fluxes by coupled data assimilation/ models with observed atmospheric - continental.....	241
10.1.4	ECV Product: Anthropogenic F-gas emissions from industrial processes and product use .....	242
10.1.5	ECV Product: Anthropogenic N <sub>2</sub> O emissions from fossil fuel use, industry, agriculture, waste and products use, indirect from n-related emissions/ depositions .....	243
10.1.6	ECV Product: Anthropogenic CH <sub>4</sub> emissions from fossil fuel, waste, agriculture, industrial processes and fuel use .....	244
10.1.7	ECV Product: Anthropogenic CO <sub>2</sub> emissions/ removals by land categories .....	245
10.1.8	ECV Product: Anthropogenic CO <sub>2</sub> emissions from fossil fuel use, industry, agriculture, waste and products use .....	246
10.2	Anthropogenic water use .....	247
10.2.1	ECV Product: Anthropogenic water use.....	247



## **A1. Atmospheric ECVs**

# 1. SURFACE

## 1.1 ECV: Air Pressure

### 1.1.1 ECV product: Atmospheric Pressure (near surface)

Name	Atmospheric Pressure (near surface)				
Definition	Air pressure at a known height above the surface with the height specified in the metadata.				
Unit	hPa				
Note	<p>Observations made over the ocean are not static, being mostly recorded by mobile ships and drifting buoys (Kent et al., 2019). Requirements for marine surface observations must therefore be defined in terms of the composite accuracy and sampling of the marine observing networks to achieve comparable uncertainty thresholds at similar resolution.</p> <p>The primary application of pressure in monitoring relates to the use of reanalysis and so these requirements have been set in this regard.</p> <p>Timeliness does not preclude delayed mode acquisition via e.g. data rescue.</p> <p>Important also, but not covered in the table, is the observation location information. A mis-placed observation of surface pressure (particularly the station elevation) will have substantial implications for reanalysis applications.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	Resolution is consistent with other surface ECVs
			B	100	
			T	500	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	hr		G	1	
			B	6	
			T	12	
Timeliness	h		G	6	
			B	24	
			T	monthly	
Required Measurement Uncertainty (2-sigma)	hPa		G	0.5	
			B	1	
			T	1	
Stability	hPa/decade		G	0.02	
			B	0.1	–
			T	0.2	
Standards and References	Kent, E.C., Rayner, N.A., Berry, D.I., Eastman, R., Grigorieva, V.G., Huang, B., Kennedy, J.J., Smith, S.R. and Willett, K.M., 2019: Observing Requirements for Long-Term Climate Records at the Ocean Surface. <i>Frontiers in Marine Science</i> 6, Article 441, doi:10.3389/fmars.2019.00441.				

## 1.2 ECV: Surface Temperature

### 1.2.1 ECV Product: Atmospheric Temperature near Surface

Name	Atmospheric Temperature near Surface				
Definition	Air temperature at a known height above surface, with the height specified in the metadata				
Unit	K				
Note	<p>The terminology used here for Tx and Tn and the observing cycle only applies to land-based meteorological stations. Observations made over the ocean are not static, being mostly recorded by mobile ships and drifting buoys (Kent et al., 2019). Requirements for marine surface observations must therefore be defined in terms of the composite accuracy and sampling of the marine observing networks to achieve comparable uncertainty thresholds at similar resolution, , for example through the construction of gridded data products.</p> <p>Breakthrough targets are generally needed for reanalysis to make good use of these data.</p> <p>Temporal resolution: For better Reanalysis, we need more sampling down to 100km and sub-daily (hourly or 3-hourly). This is also needed for monitoring of extremes.</p> <p>For global temperature averages, the current network is good enough (although the 500km sampling doesn't get made in many regions, such as Africa).</p> <p>Even if we got to the goal sampling, the uncertainty in the monthly global average temperatures would be reduced, but not by much from what it is now. However, these more stringent requirements will allow regional monthly averages to be calculated.</p> <p>Timeliness requirements are for routine applications related to climate monitoring, such as assimilation into reanalyses or the update of monitoring products. Observations that miss these timeliness requirements remain useful for some climate applications and can, for example, be used in periodic revisions to climate monitoring products.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	Thorne et al. (2018)
			B	100	Thorne et al. (2018)
			T	500	Threshold for horizontal resolution is based on the literature and specifically over land where correlation distances tend to be smaller than over the oceans. Thorne et al. (2018) showed via repeat sub-sampling of CRUTEM4 that well-spaced networks of the order 180 stations over the globe could recreate full-field global mean land surface air temperature estimates (see details in Jones et al., 1997) for the monthly timescale. For surface air temperature over the ocean which is taken predominantly by ships and buoys this can be challenging in remote Ocean basins (see the earlier note and Kent et al., 2019).
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	h		G	Sub-hourly	Required for derivation of extreme indices.
			B	1	Required for CDAS-mode reanalysis assimilation. Breakthrough is the monthly average necessary to inform the global, regional and national monitoring statements from WMO and members. Captures most of the variability in the diurnal cycle
			T	3 (daily Tx/Tm)	Minimum sampling of diurnal cycle
Timeliness	daily		G	6-hourly	Allows use in near-real time reanalysis
			B	daily	Required for CDAS-mode reanalysis assimilation. Allows use in daily climate monitoring products
			T	monthly	the monthly average is necessary to inform the global, regional and national monitoring statements from WMO and members. Allows use in monthly climate monitoring products
Required Measurement Uncertainty (2-sigma)	K		G	0.1	Uncertainty is assumed to include random and systematic effects. Thorne et al. (2018) Jones et al. (1997)
			B	0.5	
			T	1	
Stability	K/decade		G	0.01	Required for large-scale averages over century scales
			B	0.05	Required for large-scale averages over multi-decadal scales
			T	0.1	Required for regional averages over multi decadal scales

<p><b>Standards and References</b></p>	<p>Jones, P.D., Osborn, T.J. and Briffa, K.R., 1997: Estimating sampling errors in large-scale temperature averages. <i>J. Climate</i> 10, 2548-2568.</p> <p>Kent, E.C., Rayner, N.A., Berry, D.I., Eastman, R., Grigorieva, V.G., Huang, B., Kennedy, J.J., Smith, S.R. and Willett, K.M., 2019: Observing Requirements for Long-Term Climate Records at the Ocean Surface. <i>Frontiers in Marine Science</i> 6, Article 441, doi:10.3389/fmars.2019.00441.</p> <p>Thorne, P.W., Diamond, H.J., Goodison, B., Harrigan, S. Hausfather, Z., Ingleby, N.B., Jones, P.D., Lawrimore, J.H., Lister, D.H., Merlone, A., Oakley, T., Palecki, M., Peterson, T.C., de Podesta, M., Tassone, C., Venema, V. and Willett, K.M., 2018: Towards a global land surface climate fiducial reference measurements network. <i>Int. J. Climatol.</i> 38, 2760-2774, <a href="https://doi.org/10.1002/joc.5458">https://doi.org/10.1002/joc.5458</a>.</p>
--	--

## 1.3 ECV: Surface Wind Speed and Direction

### 1.3.1 ECV Product: Wind Direction (near surface)

Name	Wind Direction (near surface)				
Definition	Direction from which wind is blowing at a known height above the surface which is to be specified in the metadata.				
Unit	Degree true				
Note	Timeliness requirements are for routine applications related to climate monitoring, such as assimilation into reanalyses or the update of monitoring products. Observations that miss these timeliness requirements remain useful for some climate applications and can, for example, be used in periodic revisions to climate monitoring products.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B	100	For consistency with other surface ECV
			T	500	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	h		G	Sub-hourly	
			B	1	Captures most of the variability in the diurnal cycle
			T	3	Minimum sampling of diurnal cycle
Timeliness	h		G	6	Allows use in near-real time reanalysis
			B	24	Allows use in daily climate monitoring products
			T	monthly	Allows use in monthly climate monitoring products
Required Measurement Uncertainty (2-sigma)	degrees		G	1	
			B	5	
			T	10	
Stability	degrees/decade		G	1	
			B	2	
			T	5	
Standards and References	Kent, E.C., Rayner, N.A., Berry, D.I., Eastman, R., Grigorieva, V.G., Huang, B., Kennedy, J.J., Smith, S.R. and Willett, K.M., 2019: Observing Requirements for Long-Term Climate Records at the Ocean Surface. <i>Frontiers in Marine Science</i> 6, Article 441, doi:10.3389/fmars.2019.00441.				

### 1.3.2 ECV Product: Wind Speed near Surface

Name	Wind Speed (near surface)					
Definition	Speed of air at a known height above the surface which is to be specified in the metadata					
Unit	m/s					
Note	Observations made over the ocean are not static, being mostly recorded by mobile ships and drifting buoys (Kent et al., 2019). Requirements for marine surface observations must therefore be defined in terms of the composite accuracy and sampling of the marine observing networks to achieve comparable uncertainty thresholds at similar resolution.					
Requirements						
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards	
Horizontal Resolution	km		G	10		
			B	100		
			T	500		
Vertical Resolution	N/A		G	N/A	N/A	
			B	N/A	N/A	
			T	N/A	N/A	
Temporal Resolution	h		G	Sub-hourly		
			B	1		Captures most of the variability in the diurnal cycle
			T	3		Minimum sampling of diurnal cycle
Timeliness	h		G	6	Allows use in near-real time reanalysis	
			B	24		
			T	monthly		
Required Measurement Uncertainty (2-sigma)	m/s		G	0.1		
			B	0.5		
			T	1		
Stability	m/s/decade		G	0.1		
			B	0.25	–	
			T	0.5		
Standards and References	Kent, E.C., Rayner, N.A., Berry, D.I., Eastman, R., Grigorjeva, V.G., Huang, B., Kennedy, J.J., Smith, S.R. and Willett, K.M., 2019: Observing Requirements for Long-Term Climate Records at the Ocean Surface. <i>Frontiers in Marine Science</i> 6, Article 441, doi:10.3389/fmars.2019.00441.					

### 1.3.3 EC Product: Wind Vector (near Surface)

Name						Wind Vector (near surface)					
Definition						Horizontal wind vector, at a known height above the surface which is to be specified in the metadata					
Unit						m/s					
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	10							
			B	100							
			T	500							
Vertical Resolution	N/A		G	N/A	N/A						
			B	N/A	N/A						
			T	N/A	N/A						
Temporal Resolution	h		G	Sub-hourly							
			B	1	Captures most of the variability in the diurnal cycle						
			T	3	Minimum sampling of diurnal cycle						
Timeliness	h		G	6							
			B	24							
			T	monthly							
Required Measurement Uncertainty (2-sigma)	m/s		G	0.1							
			B	0.5							
			T	1							
Stability	m/s/decade		G	0.1							
			B	0.25							
			T	0.5							
Standards and References						Kent, E.C., Rayner, N.A., Berry, D.I., Eastman, R., Grigorieva, V.G., Huang, B., Kennedy, J.J., Smith, S.R. and Willett, K.M., 2019: Observing Requirements for Long-Term Climate Records at the Ocean Surface. <i>Frontiers in Marine Science</i> 6, Article 441, doi:10.3389/fmars.2019.00441.					

## 1.4 ECV: Surface Water Vapour

### 1.4.1 ECV Product: Dew Point Temperature near Surface

Name	Dew Point Temperature (near Surface)				
Definition	Temperature to which air must be cooled to become saturated with water vapor at a known height above surface, with the height specified in the metadata				
Unit	K				
Note	<p>Observations made over the ocean are not static, being mostly recorded by mobile ships and drifting buoys (Kent et al., 2019). Requirements for marine surface observations must therefore be defined in terms of the composite accuracy and sampling of the marine observing networks to achieve comparable uncertainty thresholds at similar resolution, for example through the construction of gridded data products.</p> <p>Willett et al. 2008 show that spatial scales of near surface dew point temperature are comparable to those of temperature so the same horizontal resolution should be broadly applicable. Timeliness requirements are for routine applications related to climate monitoring, such as assimilation into reanalyses or the update of monitoring products. Observations that miss these timeliness requirements remain useful for some climate applications and can, for example, be used in periodic revisions to climate monitoring products.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	Willett et al. 2008, based on analogy with temperature
			B	100	
			T	500	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	h		G	Sub-hourly	
			B	1	Captures most of the variability in the diurnal cycle
			T	3	Minimum sampling of diurnal cycle
Timeliness			G	6-hourly	Allows use in near-real time reanalysis
			B	daily	Allows use in daily climate monitoring products
			T	monthly	Allows use in monthly climate monitoring products
Required Measurement Uncertainty (2-sigma)	K		G	0.1	
			B	0.5	
			T	1	
Stability	K/decade		G	0.01	Required for large-scale averages over century scales
			B	0.05	Required for large-scale averages over multi-decadal scales
			T	0.1	Required for regional averages over multi decadal scales
Standards and References	<p>Kent, E.C., Rayner, N.A., Berry, D.I., Eastman, R., Grigorieva, V.G., Huang, B., Kennedy, J.J., Smith, S.R. and Willett, K.M., 2019: Observing Requirements for Long-Term Climate Records at the Ocean Surface. <i>Frontiers in Marine Science</i> 6, Article 441, doi:10.3389/fmars.2019.00441.</p> <p>Willett, K. M., Dunn, R. J. H., Thorne, P. W., Bell, S., de Podesta, M., Parker, D. E., Jones, P. D., and Williams Jr., C. N.: HadISDH land surface multi-variable humidity and temperature record for climate monitoring, <i>Clim. Past</i>, 10, 1983-2006, doi:10.5194/cp-10-1983-2014, 2014.</p> <p>Willett, K. M., Williams Jr., C. N., Dunn, R. J. H., Thorne, P. W., Bell, S., de Podesta, M., Jones, P. D., and Parker D. E., 2013: HadISDH: An updated land surface specific humidity product for climate monitoring. <i>Climate of the Past</i>, 9, 657-677, doi:10.5194/cp-9-657-2013.</p>				



## 1.4.2 ECV Product: Relative Humidity near Surface

Name		Relative Humidity (nearsurface)			
Definition	Relative humidity at a known height above surface, with the height specified in the metadata.. Relative humidity is the ratio of the amount of atmospheric moisture present relative to the amount that would be present if the air were saturated with respect to water or ice to be specified in the metadata				
Unit	%				
Note	<p>Observations made over the ocean are not static, being mostly recorded by mobile ships and drifting buoys (Kent et al., 2019). Requirements for marine surface observations must therefore be defined in terms of the composite accuracy and sampling of the marine observing networks to achieve comparable uncertainty thresholds at similar resolution.</p> <p>Relative humidity is often derived from temperature and dewpoint temperature. It is important that the conversions be applied at the observation scale so as not to introduce both random and systematic effects into the analysis. Formulae to convert between the various water vapour metrics (Specific Humidity, Relative Humidity and Dewpoint are given in Willett et al. (2008). The observation requirements for each of the humidity variables is based on those for dewpoint temperature and are approximate, for more detailed information see Bell (1996).</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	By analogy with near surface dewpoint temperature via near surface air temperature, requirement therefore tentative.
			B	100	
			T	500	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	h		G	Sub-hourly	As for horizontal resolution
			B	1	
			T	3	
Timeliness	h		G	6-hourly	
			B	daily	
			T	monthly	
Required Measurement Uncertainty (2-sigma)	%RH		G	0.5	
			B	2.5	
			T	5	
Stability	%RH/decade		G	0.05	
			B	0.25	
			T	0.5	
Standards and References	<p>S. Bell, Guide to the measurement of humidity, Guide 103, NPL, 1996.</p> <p>Kent, E.C., Rayner, N.A., Berry, D.I., Eastman, R., Grigorieva, V.G., Huang, B., Kennedy, J.J., Smith, S.R. and Willett, K.M., 2019: Observing Requirements for Long-Term Climate Records at the Ocean Surface. <i>Frontiers in Marine Science</i> 6, Article 441, doi:10.3389/fmars.2019.00441.</p> <p>Willett, K. M., Dunn, R. J. H., Thorne, P. W., Bell, S., de Podesta, M., Parker, D. E., Jones, P. D., and Williams Jr., C. N.: HadISDH land surface multi-variable humidity and temperature record for climate monitoring, <i>Clim. Past</i>, 10, 1983-2006, doi:10.5194/cp-10-1983-2014, 2014.</p> <p>Willett, K. M., Williams Jr., C. N., Dunn, R. J. H., Thorne, P. W., Bell, S., de Podesta, M., Jones, P. D., and Parker D. E., 2013: HadISDH: An updated land surface specific humidity product for climate monitoring. <i>Climate of the Past</i>, 9, 657-677, doi:10.5194/cp-9-657-2013.</p>				

### 1.4.3 ECV Product: Air Specific Humidity near Surface

Name	Atmospheric Specific Humidity (near Surface)				
Definition	Air specific humidity at a known height above surface, with the height specified in the metadata. Specific humidity is the ratio of the mass of water vapour and the mass of moist air				
Unit	g/kg				
Note	<p>Observations made over the ocean are not static, being mostly recorded by mobile ships and drifting buoys (Kent et al., 2019). Requirements for marine surface observations must therefore be defined in terms of the composite accuracy and sampling of the marine observing networks to achieve comparable uncertainty thresholds at similar resolution.</p> <p>Willett et al 2008 show that spatial scales of surface specific humidity are comparable to those of temperature so the same horizontal resolution should be broadly applicable.</p> <p>Specific humidity is generally derived from temperature and dewpoint temperature. It is important that the conversions be applied at the observation scale so as not to introduce both random and systematic effects into the analysis. Formulae to convert between the various water vapour metrics (Specific Humidity, Relative Humidity and Dewpoint are given in Willett et al. (2008).</p> <p>Given the orders of magnitude variation in specific humidity between the tropics and the polar regions there is a strong case for latitudinally varying requirements for uncertainty and stability which would be more stringent in polar than extra-tropical than tropical climates. Current values are a compromise which may be indicative of extra-tropical locations.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B	100	
			T	500	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	h		G	Sub-hourly	
			B	1	
			T	3	
Timeliness	h		G	6	
			B	daily	
			T	monthly	
Required Measurement Uncertainty (2-sigma)	g/kg		G	0.1	
			B	0.5	
			T	1	
Stability	g/kg/decade		G	0.01	
			B	0.05	
			T	0.1	
Standards and References	<p>Kent, E.C., Rayner, N.A., Berry, D.I., Eastman, R., Grigorieva, V.G., Huang, B., Kennedy, J.J., Smith, S.R. and Willett, K.M., 2019: Observing Requirements for Long-Term Climate Records at the Ocean Surface. <i>Frontiers in Marine Science</i> 6, Article 441, doi:10.3389/fmars.2019.00441.</p> <p>Willett, K. M., Dunn, R. J. H., Thorne, P. W., Bell, S., de Podesta, M., Parker, D. E., Jones, P. D., and Williams Jr., C. N.: HadISDH land surface multi-variable humidity and temperature record for climate monitoring, <i>Clim. Past</i>, 10, 1983-2006, doi:10.5194/cp-10-1983-2014, 2014.</p> <p>Willett, K. M., Williams Jr., C. N., Dunn, R. J. H., Thorne, P. W., Bell, S., de Podesta, M., Jones, P. D., and Parker D. E., 2013: HadISDH: An updated land surface specific humidity product for climate monitoring. <i>Climate of the Past</i>, 9, 657-677, doi:10.5194/cp-9-657-2013.</p>				

## 1.5 ECV: Precipitation

### 1.5.1 ECV Product: Accumulated Precipitation

<b>Name</b>	<b>Accumulated precipitation</b>				
<b>Definition</b>	Integration of solid and liquid precipitation rate reaching the ground over a time period defined in the metadata.				
<b>Unit</b>	mm				
<b>Note</b>	This ECV is designed to monitor the amount of precipitation globally in order to investigate the impact on the hydrological cycle, agriculture, drinking water supply or droughts. It is driven to support studies on a continental to global scale. This implies, that it is not designed to monitor extremes globally on a local to regional scale in space and time, as the requirements are different to answer both scientific questions.				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	50	
			B	125	
			T	250	
<b>Vertical Resolution</b>	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
<b>Temporal Resolution</b>	N/A aggregation over period defines the upper limit of temporal sampling		G	Monthly totals	
			B	Seasonal totals	
			T	Annual totals	
<b>Timeliness</b>	N/A		G	Monthly	
			B	Seasonal	
			T	Annual	
<b>Required Measurement Uncertainty (2-sigma)</b>	Mm		G	1	
			B	2	
			T	5	
<b>Stability</b>	mm/decade		G	0.02	
			B	0.05	
			T	0.1	
<b>Standards and References</b>					

## 1.6 ECV: Surface radiation budget

### 1.6.1 Upward Long-Wave Irradiance at Earth Surface

Name						Upward Long-Wave Irradiance at Earth Surface					
Definition						Flux density of terrestrial radiation emitted by the Earth surface					
Unit						W/m <sup>2</sup>					
Note						Main driver of the uncertainty in the components of the surface radiation budget is the composition of the atmosphere (e.g. Water vapour, Aerosols, Clouds)". The Required Measurement Uncertainty (2-sigma) (see the VIM & GUM) includes both random and systematic components. The uncertainty is meant to be an uncertainty for the measurement device / instrument / ECV algorithm. The uncertainty of spatially and temporally averaged global mean value might be smaller.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	50							
			B	250							
			T	1000							
Vertical Resolution	N/A		G	N/A	N/A						
			B	N/A	N/A						
			T	N/A	N/A						
Temporal Resolution	h		G	1							
			B	24							
			T	720							
Timeliness	days		G		1 month after complete year						
			B								
			T								
Required Measurement Uncertainty (2-sigma)	W/m <sup>2</sup>		G	1							
			B	5							
			T	10							
Stability	W/m <sup>2</sup> /decade		G	0.2							
			B	0.5							
			T	1							
Standards and References											

### 1.6.2 ECV Product: Downward Long-Wave Irradiance at Earth Surface

<b>Name</b>	<b>Downward Long-Wave Irradiance at Earth Surface</b>				
<b>Definition</b>	Flux density of radiation emitted by the gases, aerosols and clouds of the atmosphere to the Earth's surface				
<b>Unit</b>	W/m <sup>2</sup>				
<b>Note</b>	Main driver of the uncertainty in the components of the surface radiation budget is the composition of the atmosphere (e.g. Water vapour, Aerosols, Clouds)". The Required Measurement Uncertainty (2-sigma) (see the VIM & GUM) includes both random and systematic components. The uncertainty is meant to be an uncertainty for the measurement device / instrument / ECV algorithm. The uncertainty of spatially and temporally averaged global mean value might be smaller.				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	50	
			B	250	
			T	1000	
<b>Vertical Resolution</b>	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
<b>Temporal Resolution</b>	h		G	1	
			B	24	
			T	720	
<b>Timeliness</b>	days		G		1 month after the observations period
			B		
			T		
<b>Required Measurement Uncertainty (2-sigma)</b>	W/m <sup>2</sup>		G	1	
			B	5	
			T	10	
<b>Stability</b>	W/m <sup>2</sup> /decade		G	0.2	
			B	0.5	
			T	1	
<b>Standards and References</b>					

### 1.6.3 ECV Product: Downward Short-Wave Irradiance at Earth Surface

Downward Short-Wave Irradiance at Earth Surface					
<b>Name</b>	Downward Short-Wave Irradiance at Earth Surface				
<b>Definition</b>	Flux density of the solar radiation at the Earth surface				
<b>Unit</b>	W/m <sup>2</sup>				
<b>Note</b>	Main driver of the uncertainty in the components of the surface radiation budget is the composition of the atmosphere (e.g. Water vapour, Aerosols, Clouds)". The Required Measurement Uncertainty (2-sigma) (see the VIM & GUM) includes both random and systematic components. The uncertainty is meant to be an uncertainty for the measurement device / instrument / ECV algorithm. The uncertainty of spatially and temporally averaged global mean value might be smaller.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	50	
			B	250	
			T	1000	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	h		G	1	
			B	24	
			T	720	
Timeliness	days		G		1 month after complete year
			B		
			T		
Required Measurement Uncertainty (2-sigma)	W/m <sup>2</sup>		G	1	
			B	5	
			T	10	
Stability	W/m <sup>2</sup> /decade		G	0.2	
			B	0.5	
			T	1	
<b>Standards and References</b>					

## 2. UPPER AIR

### 2.1 ECV: Upper-air temperature

#### 2.1.1 ECV Product: Atmospheric Temperature in the Boundary Layer

Name	Atmospheric Temperature in the Boundary Layer			
Definition	3D field of the atmospheric temperature in the Boundary Layer			
Unit	K			
Note	<p>The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation in operational analyses as well as with respect to the magnitude of typical temperature variations at relevant spatial and temporal scales. Some additional considerations are also made, for which explanations are given in notes below this table.</p> <p>The requirements for temperature in the boundary layer are mainly driven by needs for monitoring of fluxes for the goal threshold. Stability assumes independence of measurements between instruments permitting partial cancellation and is based upon need to be able to detect current trends which are c.0.2 K/decade.</p> <p>Boundary layer temperature is assumed to share spatial characteristics with surface temperature for which this has been characterized in e.g. Thorne et al., 2018</p>			
Requirements				
Item needed	Unit	Metric	[1] Value	Derivation, References and Standards
Horizontal Resolution	km		G 15	Hersbach et al. (2018), Thorne et al. (2005, 2018). This has been changed from the original 10km to 15 km to be consistent with NWP, although it is suggested that NWP should be at 10km. Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses, and resolves features influenced by local factors such as proximity of water bodies or significant topography.
			B 100	Hersbach et al. (2018), Thorne et al. (2005, 2018). A typical horizontal error correlation length in first guess fields and typical scale of mesoscale features that, especially when occurring frequently or with significant amplitude, can affect global climate. For example, Waller et al. (2016) found that error correlations of surface temperature in observation-minus-background and observation-minus-analysis residuals from the Met Office high-resolution model range between 30 km and 80 km.
			T 500	Hersbach et al. (2018), Thorne et al. (2005, 2018). Minimum resolution needed to resolve synoptic-scale features. Thorne et al., 2005 show typical e-folding correlation distances in radiosonde-measured tropospheric temperatures of at least several 100km and more generally 1000km, with larger values in the tropics. Surface and boundary layer are tightly coupled, particularly in the lowermost boundary layer.
Vertical Resolution	m		G 1	This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016). Determining fluxes requires this high vertical fidelity. Thus, this value has not been changed to be consistent with requirements for NWP as NWP thresholds would demonstrably fail to meet needs to quantify fluxes and close energy budget.
			B 10	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T 100	Minimum resolution considering the layer depth
Temporal Resolution	h		G Sub-hourly	A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018)
			B 6	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features
			T 12	Minimum resolution needed to resolve synoptic-scale waves. For this reason, it has not been changed to ensure consistency with NWP requirements.
Timeliness	h		G 1	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B 3	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)

			T	24	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	K	RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations.	G	0.1	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology. (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	0.5	
			T	1	
Stability	K/decade		G	0.01	These values are based on the need to detect temperature trends such as those observed in recent decades (IPCC 2013). (T) corresponds to regions of large trend or 50% of observed global-mean trend, (B) regions of medium trend or 20% of global-mean trend, and (G) regions of small trend or 10% of global-mean trend.
			B	0.05	
			T	0.1	
Standards and References	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara, M., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems, Atmos. Chem. Phys., 17, 1417–1452, <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>, 2017.</p> <p>Hersbach et al. (2018): Operational global reanalysis: progress, future directions and synergies with NWP. ERA Report Series, 27. <a href="http://dx.doi.org/10.21957/tkic6g3wm">http://dx.doi.org/10.21957/tkic6g3wm</a>.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 1535 pp.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p> <p>Thorne, P. W., D. E. Parker, et al. (2005). "Revisiting radiosonde upper air temperatures from 1958 to 2002." Journal of Geophysical Research-Atmospheres 110(D18), doi: 10.1029/2004JD005753</p> <p>Thorne, P.W. et al. (2018), Towards a global land surface climate fiducial reference measurements network. IJOC, <a href="http://onlinelibrary.wiley.com/doi/10.1002/joc.5458/full">http://onlinelibrary.wiley.com/doi/10.1002/joc.5458/full</a>.</p> <p>Waller, J. E.,* S. P. Ballard, S. L. Dance, G. Kelly, N. K. Nichols, and David Simonin, 2016: Diagnosing horizontal and inter-channel observation error correlations for SEVIRI observations using observation-minus-background and observation-minus-analysis statistics. Remote Sens. 2016, 8(7), 581, doi:10.3390/rs8070581</p>				



## 2.1.2 ECV Product: Atmospheric Temperature in the Free Troposphere

Name	Atmospheric Temperature in the Free Troposphere				
Definition	3D field of the atmospheric temperature in the troposphere				
Unit	K				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation in operational analyses as well as with respect to the magnitude of typical temperature variations at relevant spatial and temporal scales. Some additional considerations are also made, for which explanations are given in notes below this table.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	15	Hersbach et al. (2018), Thorne et al. (2005) This has been changed from the original 10km to 15 km to be consistent with NWP, although it is suggested that NWP should be at 10km. Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses, and resolves features influenced by local factors such as proximity of water bodies or significant topography.
			B	100	Hersbach et al. (2018), Thorne et al. (2005). A typical horizontal error correlation length in first guess fields and typical scale of mesoscale features that, especially when occurring frequently or with significant amplitude, can affect global climate. Hersbach et al. (2018) shows examples of the background error covariances prescribed for the latest-generation reanalysis, where the horizontal correlation decreases below 1/e within the length of 500 km or less in the troposphere. It should be noted that the correlation length depends on the data assimilation system used as well as the observing system assimilated for making initial conditions. In general, the correlation length tends to be shorter when the data assimilation system has a higher resolution and is more advanced as well as when the observations assimilated have a higher density. In order to produce reanalysis data with accuracy comparable to NWP, the requirements need to be similar to those for NWP, as already proposed in the table.
			T	1000	Hersbach et al. (2018), Thorne et al. (2005) Minimum resolution needed to resolve synoptic-scale waves. Thorne et al., (2005) show typical e-folding correlation distances in radiosonde-measured tropospheric temperatures of at least several 100km and more generally 1000km, with larger values in the tropics.
Vertical Resolution	km		G	0.01	This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016). This has not been changed to be consistent with NWP requirements as NWP has requirements that are too coarse for some such applications, e.g. determining fluxes requires high vertical fidelity.
			B	0.1	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	1	Minimum resolution considering the layer depth
Temporal Resolution	h		G	1	A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018)
			B	12	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features
			T	24	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	1	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring

			B	3	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	6	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	K	RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations.	G	0.1	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology. (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	0.5	
			T	1	
Stability	K/decade		G	0.01	IPCC (2013) These values are based on the need to detect temperature trends such as those observed in recent decades (IPCC 2013; Lübken et al. 2013). (T) corresponds to regions of large trend or 50% of observed global-mean trend, (B) regions of medium trend or 20% of global-mean trend, and (G) regions of small trend or 10% of global-mean trend.
			B	0.02	
			T	0.05	
Standards and References	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara, M., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems, Atmos. Chem. Phys., 17, 1417–1452, <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>, 2017.</p> <p>Hersbach et al. (2018): Operational global reanalysis: progress, future directions and synergies with NWP. ERA Report Series, 27. <a href="http://dx.doi.org/10.21957/tkic6g3wm">http://dx.doi.org/10.21957/tkic6g3wm</a>.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 1535 pp.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p> <p>Lübken, F.-J., Berger, U., and Baumgarten, G. (2013), Temperature trends in the midlatitude summer mesosphere, J. Geophys. Res. Atmos., 118, 13,347-13,360, doi:10.1002/2013JD020576.</p> <p>Thorne, P. W., D. E. Parker, et al. (2005). "Revisiting radiosonde upper air temperatures from 1958 to 2002." Journal of Geophysical Research-Atmospheres 110(D18), doi: 10.1029/2004JD005753</p>				

### 2.1.3 ECV Product: Atmospheric Temperature in the Upper Troposphere and Lower Stratosphere

Name		Atmospheric Temperature in the Upper Troposphere and Lower Stratosphere			
Definition		3D field of the atmospheric temperature in the UTLS			
Unit		K			
Note		The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation in operational analyses as well as with respect to the magnitude of typical temperature variations at relevant spatial and temporal scales. Some additional considerations are also made, for which explanations are given in notes below this table. For vertical resolution, high vertical resolution is required to diagnose both multiple tropopauses but also trends in tropopause height.			
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	Hersbach et al. (2018), Thorne et al. (2005) Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses. This has been changed from the original 10km to 15 km to be consistent with NWP, although it is suggested that NWP should be at 10km.
			B	100	Hersbach et al. (2018), Thorne et al. (2005). A typical horizontal error correlation length in first guess fields and typical scale of mesoscale features that, especially when occurring frequently or with significant amplitude, can affect global climate.
			T	500	Hersbach et al. (2018), Thorne et al. (2005) Minimum resolution needed to resolve synoptic-scale waves. Thorne et al., 2005 show typical e-folding correlation distances in radiosonde-measured tropospheric temperatures of at least several 100km and more generally 1000km, with larger values in the tropics.
Vertical Resolution	m		G	25	Thorne et al (2005). This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016). Neither the current NWP resolution of 3km, nor the NWP goal of 300m, is adequate for locating the tropopause.
			B	100	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	250	Minimum resolution considering the layer depth
Temporal Resolution	h		G	1	A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018)
			B	12	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features
			T	24	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	1	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	3	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	6	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	K	RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN	G	0.1	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology. (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	0.5	
			T	1	

		Monitoring Centre for upper-air observations.			
Stability	K/decade		G	0.01	These values are based on the need to detect temperature trends such as those observed in recent decades (IPCC 2013; Lübken et al. 2013). (T) corresponds to regions of large trend or 50% of observed global-mean trend, (B) regions of medium trend or 20% of global-mean trend, and (G) regions of small trend or 10% of global-mean trend.
			B	0.02	
			T	0.05	
Standards and References	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara, M., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems, <i>Atmos. Chem. Phys.</i>, 17, 1417–1452, <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>, 2017.</p> <p>Hersbach et al. (2018): Operational global reanalysis: progress, future directions and synergies with NWP. ERA Report Series, 27. <a href="http://dx.doi.org/10.21957/tkic6g3wm">http://dx.doi.org/10.21957/tkic6g3wm</a>.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. <i>Bull. Amer. Meteor. Soc.</i>, 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 1535 pp.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p> <p>Lübken, F.-J., Berger, U., and Baumgarten, G. (2013), Temperature trends in the midlatitude summer mesosphere, <i>J. Geophys. Res. Atmos.</i>, 118, 13,347-13,360, doi:10.1002/2013JD020576.</p> <p>Thorne, P. W., D. E. Parker, et al. (2005). "Revisiting radiosonde upper air temperatures from 1958 to 2002." <i>Journal of Geophysical Research-Atmospheres</i> 110(D18), doi: 10.1029/2004JD005753</p>				

## 2.1.4 ECV Product: Atmospheric Temperature in the Middle and Upper Stratosphere

Name	Atmospheric Temperature in the Middle and Upper Stratosphere				
Definition	3D field of the atmospheric temperature in the middle and upper stratosphere				
Unit	K				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation in operational analyses as well as with respect to the magnitude of typical temperature variations at relevant spatial and temporal scales. Correlation distances on climate timescales are much larger in the stratosphere than the troposphere. The dynamical processes are distinct as is the degree of stratification which leads to lower requirements for both vertical and spatial resolution. Some large-scale waves are common to the upper stratosphere and lower mesosphere, with horizontal scales of around 2500 km. Historical and projected future trends are larger so commensurately the stability requirements can be relaxed accordingly.				
Requirements					
Item needed	Unit	Metric	[1] Value	Derivation and References and Standards	
Horizontal Resolution	km		G	50	Vincent (2015) The stratospheric effective resolution of most NWP systems
			B	100	Vincent (2015) A typical horizontal error correlation length in first guess fields and typical scale of mesoscale features that, especially when occurring frequently or with significant amplitude, can affect global climate.
			T	1500	Vincent (2015) Minimum resolution needed to resolve synoptic-scale features.
Vertical Resolution	km		G	0.5	This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016).
			B	1	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	3	Minimum resolution considering the layer depth
Temporal Resolution	h		G	1	A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018)
			B	12	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features
			T	24	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	1	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	3	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	6	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	K	RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations.	G	0.1	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology. (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	0.5	
			T	1	
Stability	K/decade		G	0.05	These values are based on the need to detect temperature trends such as those observed in recent decades (IPCC 2013; Lübken et al. 2013). (T) corresponds to regions of large trend or 50% of observed
			B	0.1	
			T	0.2	

					<p>global-mean trend, (B) regions of medium trend or 20% of global-mean trend, and (G) regions of small trend or 10% of global-mean trend. IPCC(2013)</p>
<p><b>Standards and References</b></p>	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara, M., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems, Atmos. Chem. Phys., 17, 1417–1452, <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>, 2017.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 1535 pp.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p> <p>Lübken, F.-J., Berger, U., and Baumgarten, G. (2013), Temperature trends in the midlatitude summer mesosphere, J. Geophys. Res. Atmos., 118, 13,347-13,360, doi:10.1002/2013JD020576.</p> <p>Vincent, R. A., 2015: The dynamics of the mesosphere and lower thermosphere: a brief review.</p>				

## 2.1.5 ECV Product: Atmospheric Temperature in the Mesosphere

Name	Atmospheric Temperature in the Mesosphere				
Definition	3D field of the atmospheric temperature in the mesosphere				
Unit	K				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation in operational analyses as well as with respect to the magnitude of typical temperature variations at relevant spatial and temporal scales. Horizontal resolution, vertical resolution, temporal sampling, and uncertainty thresholds are based on the scales and amplitudes of typical dynamical features of the mesosphere. Trends and current uncertainties are larger than in the troposphere, so stability criteria can also be relaxed.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	50	Garcia (2005), Vincent (2015) Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses.
			B	100	Garcia (2005), Vincent (2015) A typical horizontal error correlation length in first guess fields and typical scale of mesoscale features that, especially when occurring frequently or with significant amplitude, can affect global climate.
			T	1500	Garcia (2005), Vincent (2015) Minimum resolution needed to resolve synoptic-scale waves. Thorne et al., (2005) show typical e-folding correlation distances in radiosonde-measured tropospheric temperatures of at least several 100km and more generally 1000km, with larger values in the tropics.
Vertical Resolution	km		G	0.5	Garcia (2005), Vincent (2015) This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016).
			B	1	Garcia (2005), Vincent (2015) Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	3	Garcia (2005), Vincent (2015) Minimum resolution considering the layer depth
Temporal Resolution	h		G	1	A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018)
			B	12	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features
			T	24	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	1	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	3	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	6	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	K	RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations.	G	0.1	Garcia (2005), Vincent (2015) These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology. (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	0.5	
			T	1	
Stability	K/decade		G	0.05	Lübken et al. (2013)

			B	0.1	These values are based on the need to detect temperature trends such as those observed in recent decades (IPCC 2013; Lübken et al. 2013). (T) corresponds to regions of large trend or 50% of observed global-mean trend, (B) regions of medium trend or 20% of global-mean trend, and (G) regions of small trend or 10% of global-mean trend.
			T	0.2	
Standards and References	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara, M., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems, <i>Atmos. Chem. Phys.</i>, 17, 1417–1452, <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>, 2017.</p> <p>Garcia, R. A., 2005: Large-Scale waves in the mesosphere and lower thermosphere Observed by SABER. <i>Journal of Atmospheric Sciences</i>, 62, 10.1175/JAS3612.1.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. <i>Bull. Amer. Meteor. Soc.</i>, 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 1535 pp.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p> <p>Lübken, F.-J., Berger, U., and Baumgarten, G. (2013), Temperature trends in the midlatitude summer mesosphere, <i>J. Geophys. Res. Atmos.</i>, 118, 13,347-13,360, doi: 10.1002/2013JD020576.</p> <p>Thorne, P. W., D. E. Parker, et al. (2005). "Revisiting radiosonde upper air temperatures from 1958 to 2002." <i>Journal of Geophysical Research-Atmospheres</i> 110(D18), doi: 10.1029/2004JD005753</p> <p>Vincent, R. A., 2015: The dynamics of the mesosphere and lower thermosphere: a brief review.</p>				



## 2.2 ECV: Upper-air wind speed and direction

### 2.2.1 ECV Product: Wind (horizontal) in the Boundary Layer

Name	Wind (horizontal) in the Boundary Layer				
Definition	3D field of the horizontal vector component (2D) of the 3D wind vector in the BL				
Unit	m/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given in notes below this table. Additional goal requirements for the lowermost part of the boundary layer (values in parentheses) are for better sampling of micrometeorological phenomena and accurate calculation of fluxes.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	This has been changed from the original 10 km to 15 km to be consistent with Global NWP. Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	100	A typical horizontal error correlation length in first guess fields.
			T	500	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	m		G	10(1)	Global NWP requirements are not adequate for accurate calculation of fluxes and these have not been changed. This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016). The value in parentheses is for the lowermost part of the boundary layer (up to 100 m above the ground)
			B	100	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	500	Minimum resolution considering the layer depth
Temporal Resolution	min		G	30(1)	Global NWP requirements are not adequate for accurate calculation of fluxes and these have not been changed. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018). Given large diurnal cycle in the boundary layer, higher temporal sampling is required. The value in parentheses is for the lowermost part of the boundary layer (up to 100 m above the ground)
			B	60	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features.
			T	720	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	m/s	RMS departures of observed values from first guess field values, in accordance with the practical	G	0.5	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 1, 2). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	3	
			T	5	

		verification schemes applied by the GUAN Monitoring Centre for upper-air observations (Fig.3).			
Stability	m/s/decade		G	0.1	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 1). (T) corresponds to regions of large trend, (B) of medium trend and (G) of small trend.
			B	0.3	
			T	0.5	
Standards and References	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452. <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p>				

## 2.2.2 ECV Product: Wind (horizontal) in the Free Troposphere

Name	Wind (horizontal) in the Free Troposphere				
Definition	3D field of the horizontal vector component (2D) of the 3D wind vector in the troposphere				
Unit	m/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given where needed.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	This has been changed from the original 10 km to 15 km to be consistent with Global NWP. Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	100	A typical horizontal error correlation length in first guess fields.
			T	1000	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	km		G	0.01	Global NWP requirements are not adequate to monitor large-scale vertical circulation (e.g. the Hadley and Walker circulation) and these have not been changed. This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016).
			B	0.1	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	1.5	Minimum resolution considering the layer depth. The threshold for vertical resolution roughly corresponds to the resolution of the standard levels for the traditional radiosonde observation.
Temporal Resolution	h		G	1	This has been changed from the original 0.5 h to 1 h to be consistent with Global NWP. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018).
			B	6	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features.
			T	12	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	m/s	RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations	G	1	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 1, 2). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	3	
			T	5	

<b>Stability</b>	m/s/decade	(Fig.3).	G B T	0.1 0.3 0.5	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 1). (T) corresponds to regions of large trend, (B) of medium trend and (G) of small trend.
<b>Standards and References</b>	ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a> . Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452. <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a> . Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a> . JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a> .				

### 2.2.3 ECV Product: Wind (horizontal) in the Upper Troposphere and Lower Stratosphere

Name	Wind (horizontal) in the Upper Troposphere and Lower Stratosphere				
Definition	3D field of the horizontal vector component (2D) of the 3D wind vector in the UTLS				
Unit	m/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given where needed.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	This has been changed from the original 10 km to 15 km to be consistent with Global NWP. Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	100	A typical horizontal error correlation length in first guess fields.
			T	500	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	km		G	0.025	Global NWP requirements (0.3 km for goal and 3 km for threshold) are not adequate to infer tropopause region behavior and thus we are not changing these except that the goal requirement has been relaxed from 0.01 km to 0.025 km. This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016).
			B	0.1	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	0.5	Minimum resolution considering the layer depth. To infer tropopause region behavior, such as tropopause folding (e.g. Lamarque and Hess 2015), higher vertical resolution is required.
Temporal Resolution	h		G	1	This has been changed from the original 0.5 h to 1 h to be consistent with Global NWP. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018).
			B	6	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features.
			T	12	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	m/s	RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations	G	1	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 1, 2). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	3	
			T	5	

		(Fig.3).			
<b>Stability</b>	m/s/decade		G	0.1	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 1). (T) corresponds to regions of large trend, (B) of medium trend and (G) of small trend.
			B	0.3	
			T	0.5	
<b>Standards and References</b>	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452. <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p> <p>Lamarque, J. F., and P. Hess, 2015: Stratosphere/troposphere exchange and structure – local process. Encyclopedia of Atmospheric Sciences (Second Edition), 262-268. <a href="https://doi.org/10.1016/B978-0-12-382225-3.00395-9">https://doi.org/10.1016/B978-0-12-382225-3.00395-9</a>.</p>				

## 2.2.4 ECV Product: Wind (horizontal) in the Middle and Upper Stratosphere

Name	Wind (horizontal) in the Middle and Upper Stratosphere				
Definition	3D field of the horizontal vector component (2D) of the 3D wind vector in the middle and upper stratosphere.				
Unit	m/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given where needed.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	50	Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	100	A typical horizontal error correlation length in first guess fields.
			T	3000	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	km		G	1	This has been changed from the original 0.5 km to 1 km to be consistent with Global NWP.
			B	2	This has been changed from the original 1 km to 2 km to be consistent with Global NWP. Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	3	Minimum resolution considering the layer depth.
Temporal Resolution	h		G	1	This has been changed from the original 0.5 h to 1 h to be consistent with Global NWP. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018).
			B	6	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features.
			T	24	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	m/s	RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations (Fig.3).	G	1	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 1, 2). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	5	
			T	10	
Stability	m/s/decade		G	0.1	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 1). (T) corresponds to regions of large trend, (B) of medium trend and (G) of small trend.
			B	0.5	
			T	1	
Standards and References	<input type="checkbox"/> ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a> .				
	<input type="checkbox"/> Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452.				

<https://doi.org/10.5194/acp-17-1417-2017>.

□ Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <https://doi.org/10.1175/BAMS-D-15-00169.1>.

□ JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm>.



## 2.2.5 ECV Product: Wind (horizontal) in the Mesosphere

Name	Wind (horizontal) in the Mesosphere				
Definition	3D field of the horizontal vector component (2D) of the 3D wind vector in the mesosphere.				
Unit	m/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given where needed.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	50	Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	100	A typical horizontal error correlation length in first guess fields.
			T	3000	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	km		G	1	
			B	2	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	3	Minimum resolution considering the layer depth.
Temporal Resolution	h		G	1	This has been changed from the original 0.5 h to 1 h to be consistent with Global NWP. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018).
			B	6	A typical time interval between numerical analyses and/or the typical time scale of subsynoptic features.
			T	24	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	m/s	RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations (Fig.3).	G	1	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 1, 2). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	5	
			T	10	
Stability	m/s/decade		G	0.1	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 1). (T) corresponds to regions of large trend, (B) of medium trend and (G) of small trend.
			B	0.5	
			T	1	
Standards and References	<input type="checkbox"/> ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a> . <input type="checkbox"/> Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452. <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a> . <input type="checkbox"/> Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a> .				

□ JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm>.

### 2.2.6 ECV Product: Wind (vertical) in the Boundary Layer

Name	Wind (vertical) in the Boundary Layer				
Definition	3D field of the vertical component of the 3D wind vector in the BL				
Unit	cm/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given where needed. Additional goal requirements for the lowermost part of the boundary layer (values in parentheses) are for better sampling of micrometeorological phenomena and accurate calculation of fluxes.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	This has been changed from the original 10 km to 15 km to be consistent with Global NWP. Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	200	This has been changed from the original 100 km to 200 km to be consistent with Global NWP.
			T	500	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	m		G	10(1)	Global NWP requirements are not adequate for accurate calculation of fluxes and these have not been changed. This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016). The value in parentheses is for the lowermost part of the boundary layer (up to 100 m above the ground)
			B	100	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	500	Minimum resolution considering the layer depth
Temporal Resolution	min		G	30(1)	Global NWP requirements are not adequate for accurate calculation of fluxes and these have not been changed except that the goal requirement has been relaxed from 10 min to 30 min as has been done for Horizontal Wind Velocity in the same layer. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018). Given large diurnal cycle in the boundary layer, higher temporal sampling is required. The value in parentheses is for the lowermost part of the boundary layer (up to 100 m above the ground)
			B	60	A typical time interval between numerical analyses and/or the typical time scale of sub-synoptic features.
			T	720	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	cm/s	<sup>2</sup> Uncertainty	G	0.5	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 4, 5). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	1	
			T	1.5	
Stability	cm/s/decade		G	0.05	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 4). (T) corresponds to regions of large trend, (B) of medium
			B	0.1	
			T	0.15	

<sup>2</sup> RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations.

					trend and (G) of small trend.
<b>Standards and References</b>	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452. <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p>				

## 2.2.7 ECV Product: Wind (vertical) in the Free Troposphere

Name	Wind (vertical) in the Free Troposphere				
Definition	3D field of the vertical component of the 3D wind vector in the troposphere				
Unit	cm/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given where needed.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	This has been changed from the original 10 km to 15 km to be consistent with Global NWP. Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	200	This has been changed from the original 100 km to 200 km to be consistent with Global NWP.
			T	1000	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	km		G	0.01	Global NWP requirements are not adequate to monitor large-scale vertical circulation (e.g. the Hadley and Walker circulation) and these have not been changed. This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016).
			B	0.1	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	1.5	Minimum resolution considering the layer depth
Temporal Resolution	h		G	1	This has been changed from the original 0.5 h to 1 h to be consistent with Global NWP. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018).
			B	6	A typical time interval between numerical analyses and/or the typical time scale of sub-synoptic features.
			T	12	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	cm/s	Uncertainty <sup>3</sup>	G	0.5	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 4, 5). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	1.5	
			T	2.5	
Stability	cm/s/decade		G	0.05	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 4). (T) corresponds to regions of large trend, (B) of medium trend and (G) of small trend.
			B	0.15	
			T	0.25	
Standards and References	ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a> . Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452. <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a> . Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer.				

<sup>3</sup> RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations.

	<p>Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>. JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p>
Extremes[3]	Reviewers are invited to suggest answers for these fields

## 2.2.8 ECV Product: Wind (vertical) in the Upper Troposphere and Lower Stratosphere

Name	Wind (vertical)in the Upper Troposphere and Lower Stratosphere				
Definition	3D field of the vertical component of the 3D wind vector in the UTLS				
Unit	cm/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given where needed.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	This has been changed from the original 10 km to 15 km to be consistent with Global NWP. Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	200	This has been changed from the original 100 km to 200 km to be consistent with Global NWP.
			T	500	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	km		G	0.025	Global NWP requirements (0.3 km for goal and 3 km for threshold) are not adequate to infer tropopause region behavior and thus we are not changing these except that the goal requirement has been relaxed from 0.01 km to 0.025 km. This high resolution allows different users the option to subsample or process the data in ways that suit their applications (Ingleby et al. 2016).
			B	0.1	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	0.5	To infer tropopause region behavior, such as tropopause folding (e.g. Lamarque and Hess 2015), higher vertical resolution is required.
Temporal Resolution	h		G	1	This has been changed from the original 0.5 h to 1 h to be consistent with Global NWP. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018).
			B	6	A typical time interval between numerical analyses and/or the typical time scale of sub-synoptic features.
			T	12	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	cm/s		G	0.5	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 4, 5). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	1.5	
			T	2.5	
Stability	cm/s/decade		G	0.05	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 4). (T) corresponds to regions of large trend, (B) of medium trend and (G) of small trend.
			B	0.15	
			T	0.25	
Standards and References	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452. <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting</p>				

System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm>.

Lamarque, J. F., and P. Hess, 2015: Stratosphere/troposphere exchange and structure – local process. Encyclopedia of Atmospheric Sciences (Second Edition), 262-268.  
<https://doi.org/10.1016/B978-0-12-382225-3.00395-9>.



## 2.2.9 ECV Product: Wind (vertical) In the Middle and Upper Stratosphere

Name	Wind (vertical) In the Middle and Upper Stratosphere				
Definition	3D field of the vertical component of the 3D wind vector in the middle and upper stratosphere				
Unit	cm/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given where needed.				
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	50	Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	200	This has been changed from the original 100 km to 200 km to be consistent with Global NWP.
			T	3000	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	km		G	0.5	
			B	2	This has been changed from the original 1 km to 2 km to be consistent with Global NWP. Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	3	Minimum resolution considering the layer depth
Temporal Resolution	h		G	1	This has been changed from the original 0.5 h to 1 h to be consistent with Global NWP. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018).
			B	6	A typical time interval between numerical analyses and/or the typical time scale of sub-synoptic features.
			T	24	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	cm/s	<sup>4</sup> Uncertainty	G	1	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 4, 5). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	3	
			T	5	
Stability	cm/s/decade		G	0.05	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 4). (T) corresponds to regions of large trend, (B) of medium trend and (G) of small trend.
			B	0.15	
			T	0.25	
Standards and References	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452. <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p>				


<sup>4</sup> RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations

## 2.2.10 ECV Product: Wind (vertical) in the Mesosphere

Name	Wind (vertical) in the Mesosphere				
Definition	3D field of the vertical component of the 3D wind vector in the mesosphere				
Unit	cm/s				
Note	The following requirements are inferred mainly from the viewpoint of reanalysis and its near-real-time continuation as users of this ECV. Some additional considerations are also made, for which explanations are given where needed.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	50	Roughly corresponds to the current global NWP model resolution, which would be used for next generation reanalyses
			B	200	This has been changed from the original 100 km to 200 km to be consistent with Global NWP.
			T	3000	Minimum resolution needed to resolve synoptic-scale waves.
Vertical Resolution	km		G	1	
			B	2	Roughly corresponds to the assimilating model resolution (Fujiwara et al. 2017)
			T	3	Minimum resolution considering the layer depth
Temporal Resolution	h		G	1	This has been changed from the original 0.5 h to 1 h to be consistent with Global NWP. A typical 4D-Var timeslot length, a sub-division into which observations are grouped for processing (ECMWF 2018).
			B	6	A typical time interval between numerical analyses and/or the typical time scale of sub-synoptic features.
			T	24	Minimum resolution needed to resolve synoptic-scale waves
Timeliness	h		G	6	A typical cut-off time of the operational NWP cycle analysis (JMA 2019), which might also be used for climate monitoring
			B	18	A typical cut-off time for the Climate Data Assimilation System (a near-real time continuation of reanalysis)
			T	48	A typical master decoding cut-off time, beyond which observations are not automatically decoded and incorporated into the operational observation archive
Required Measurement Uncertainty (2-sigma)	cm/s	<sup>5</sup>	G	2	These values are inferred based on the standard deviations of 6-hourly analysis with respect to the monthly climatology (Figs. 4, 5). (T) corresponds to regions of high variability, (B) of medium variability and (G) of low variability.
			B	6	
			T	10	
Stability	cm/s/decade		G	0.1	These values are inferred based on the RMS trends of monthly analysis for the 1981-2010 period (Fig. 4). (T) corresponds to regions of large trend, (B) of medium trend and (G) of small trend.
			B	0.2	
			T	0.3	
Standards and References	<p>ECMWF, 2018: IFS documentation – Cy45r1, Part I: Observations. ECMWF, UK, 82p. Available at <a href="https://www.ecmwf.int/en/elibrary/18711-part-i-observations">https://www.ecmwf.int/en/elibrary/18711-part-i-observations</a>.</p> <p>Fujiwara et al., 2017: Introduction to the SPARC Reanalysis Intercomparison Project (S-RIP) and overview of the reanalysis systems. Atmos. Chem. Phys., 17, 1417-1452. <a href="https://doi.org/10.5194/acp-17-1417-2017">https://doi.org/10.5194/acp-17-1417-2017</a>.</p> <p>Ingleby et al., 2016: Progress toward high-resolution, real-time radiosonde reports. Bull. Amer. Meteor. Soc., 97, 2149-2161. <a href="https://doi.org/10.1175/BAMS-D-15-00169.1">https://doi.org/10.1175/BAMS-D-15-00169.1</a>.</p> <p>JMA, 2019: Outline of the operational numerical weather prediction at the Japan Meteorological Agency, Appendix to WMO Technical Progress Report on the Global Data-processing and Forecasting System (GDPFS) and Numerical Weather Prediction (NWP) Research. Japan Meteorological Agency, Tokyo, Japan. Available at <a href="http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm">http://www.jma.go.jp/jma/jma-eng/jma-center/nwp/outline2019-nwp/index.htm</a>.</p>				

<sup>5</sup> RMS departures of observed values from first guess field values, in accordance with the practical verification schemes applied by the GUAN Monitoring Centre for upper-air observations.

2.2.11 Figures

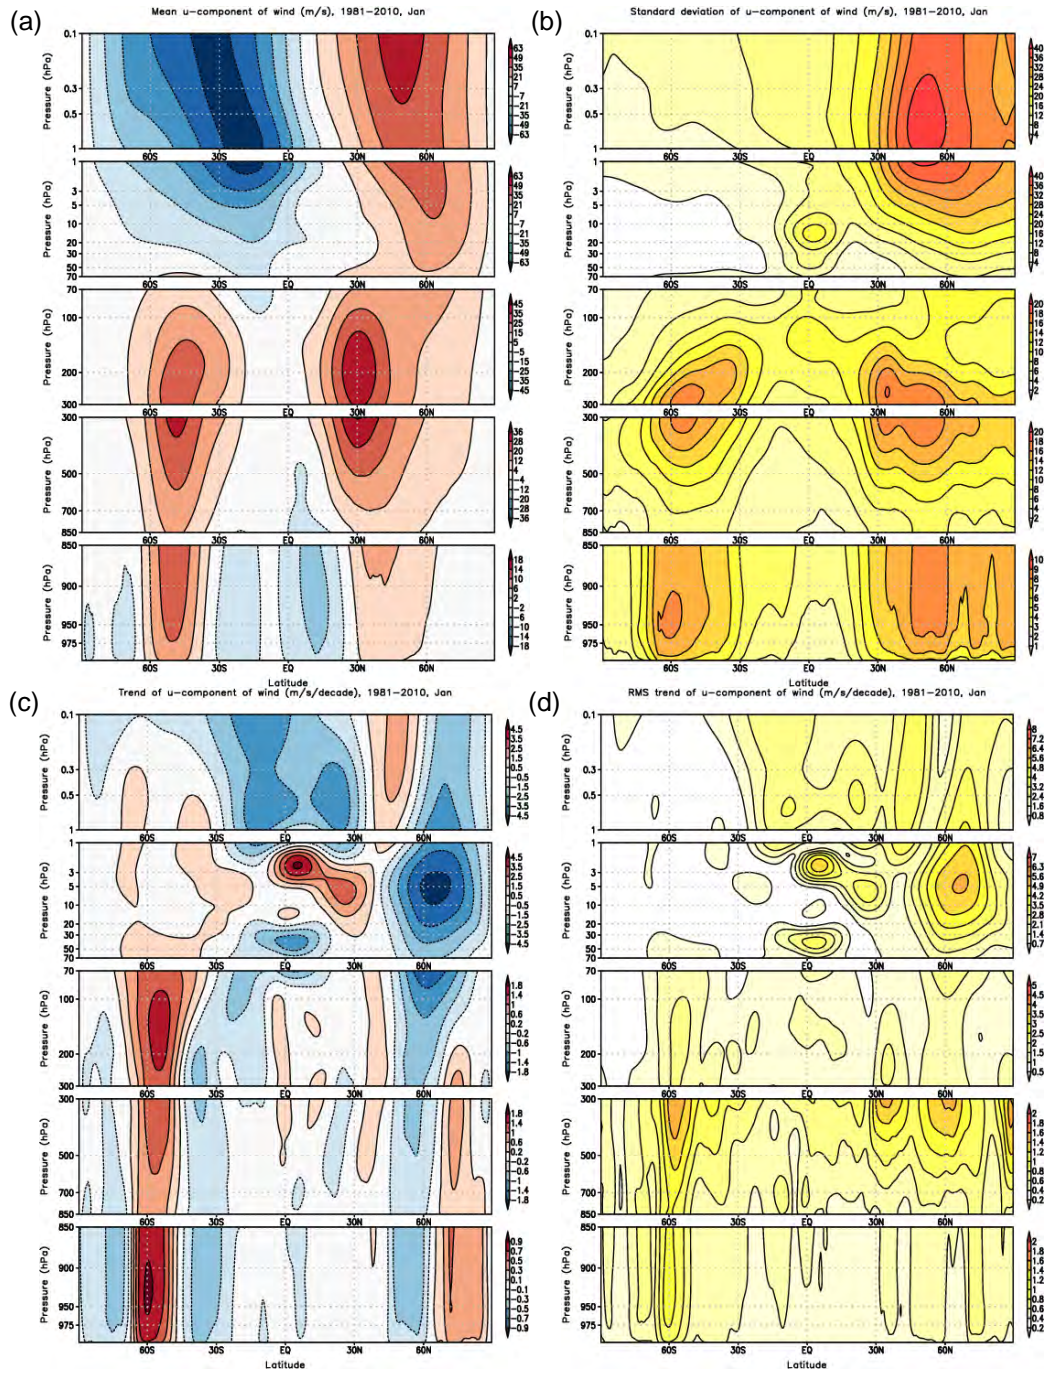

**Figure 1.** U-component of wind from JRA-55 for January (a) zonal means averaged over the 1981–2010 period, (b) standard deviations of 6-hourly analysis with respect to the monthly climatology, (c) zonal mean trends of monthly analysis for the 1981–2010 period and (d) RMS trends.





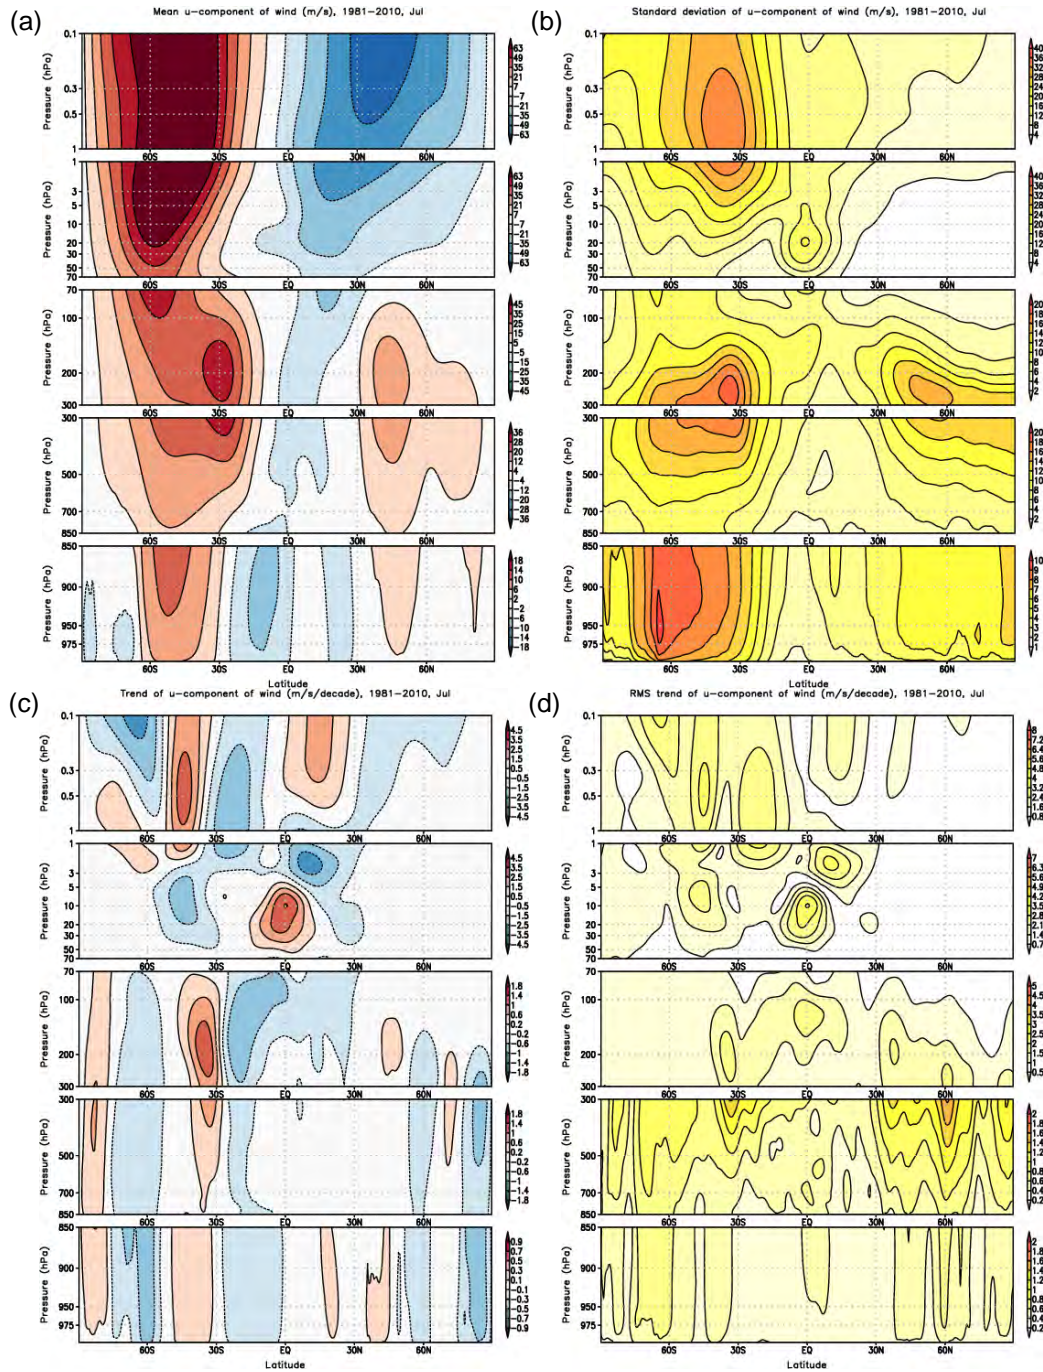


Figure 2. As Figure 1 but for July.



**Figure 3.** (Top) global mean and (2nd) standard deviation of departure, (3rd) the number and (bottom) global mean observed values of radiosonde u-component of winds used in JRA-55 for (a) 30 hPa, (b) 100 hPa, (c) 250 hPa, (d) 500 hPa and (e) 850 hPa.

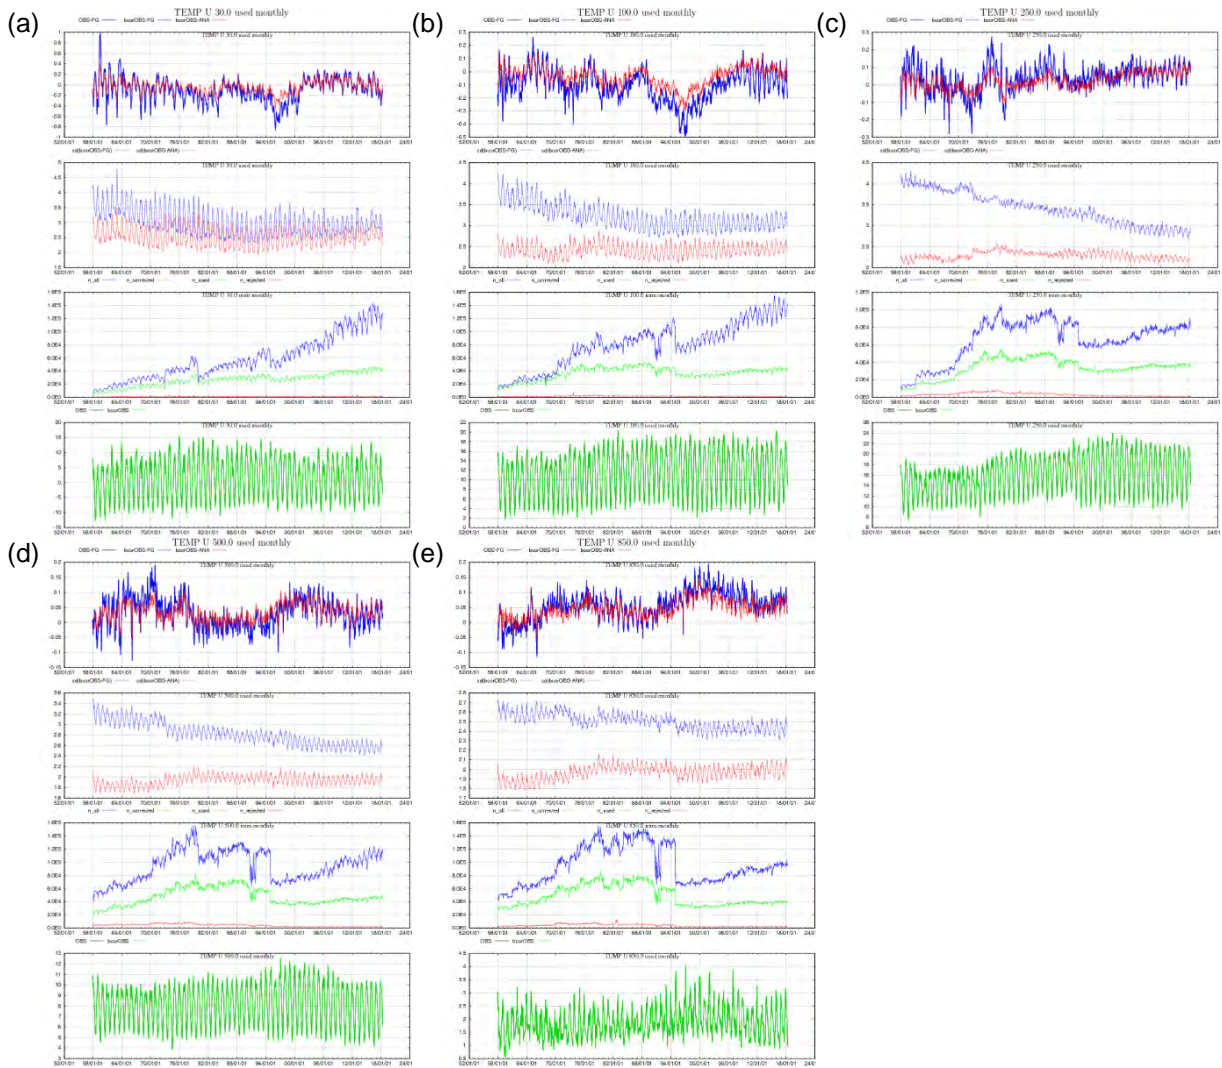

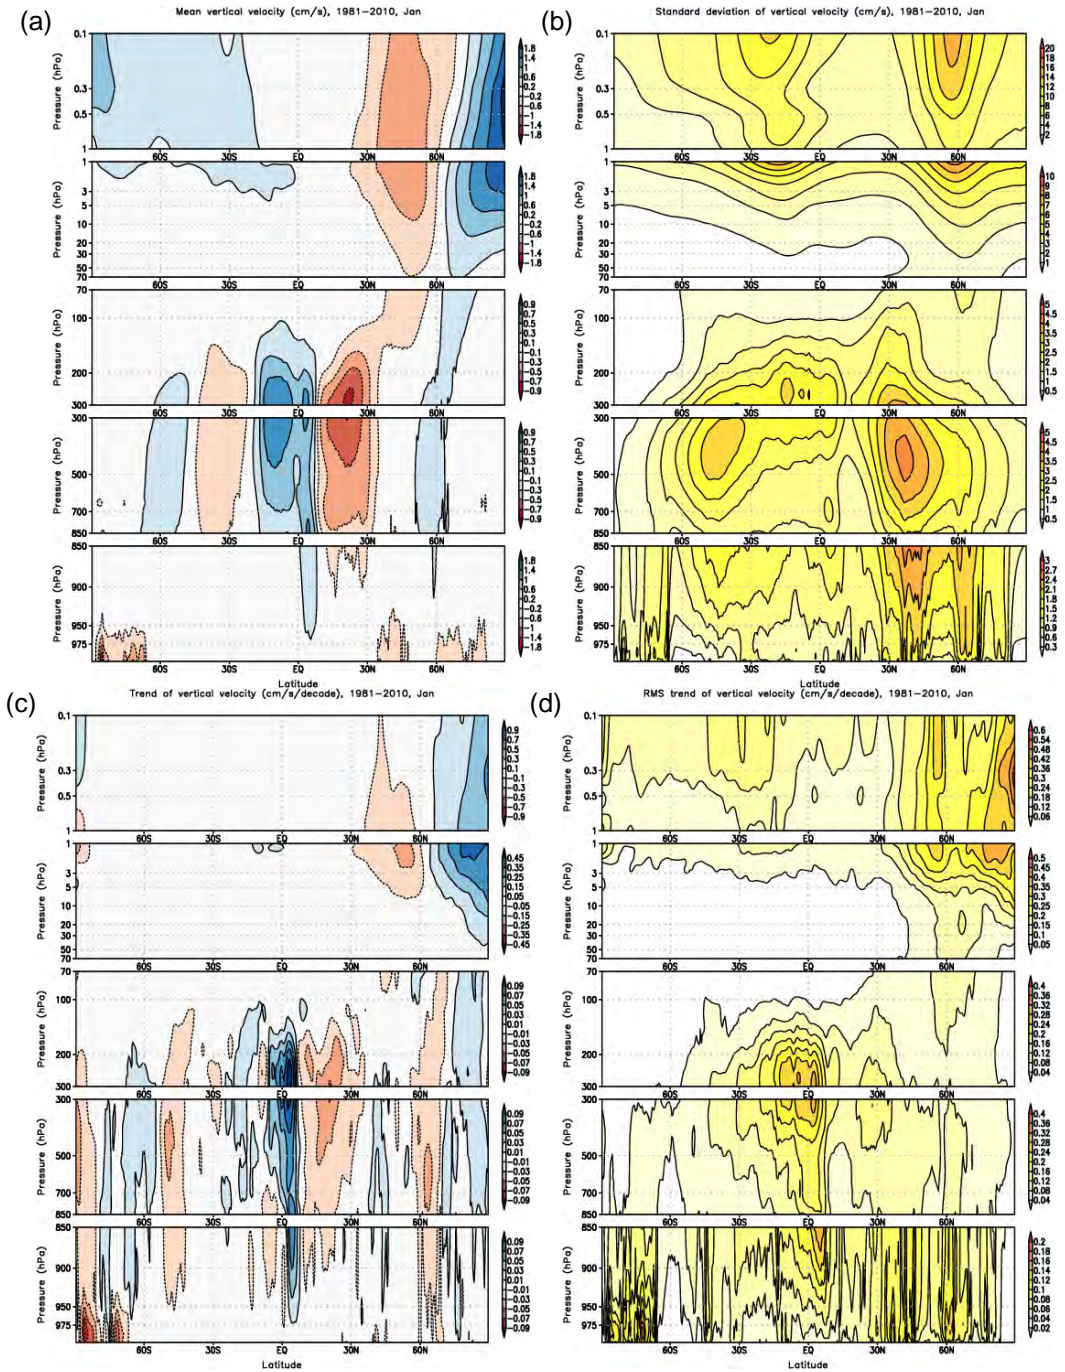

**Figure 4.** As Figure 1. but for vertical velocity from JRA-55.

Note that the vertical velocity shown here is computed from the horizontal wind velocities using the continuity equation, thus the values represent averages for the horizontal resolution of JRA-55, which is approximately 55 km.



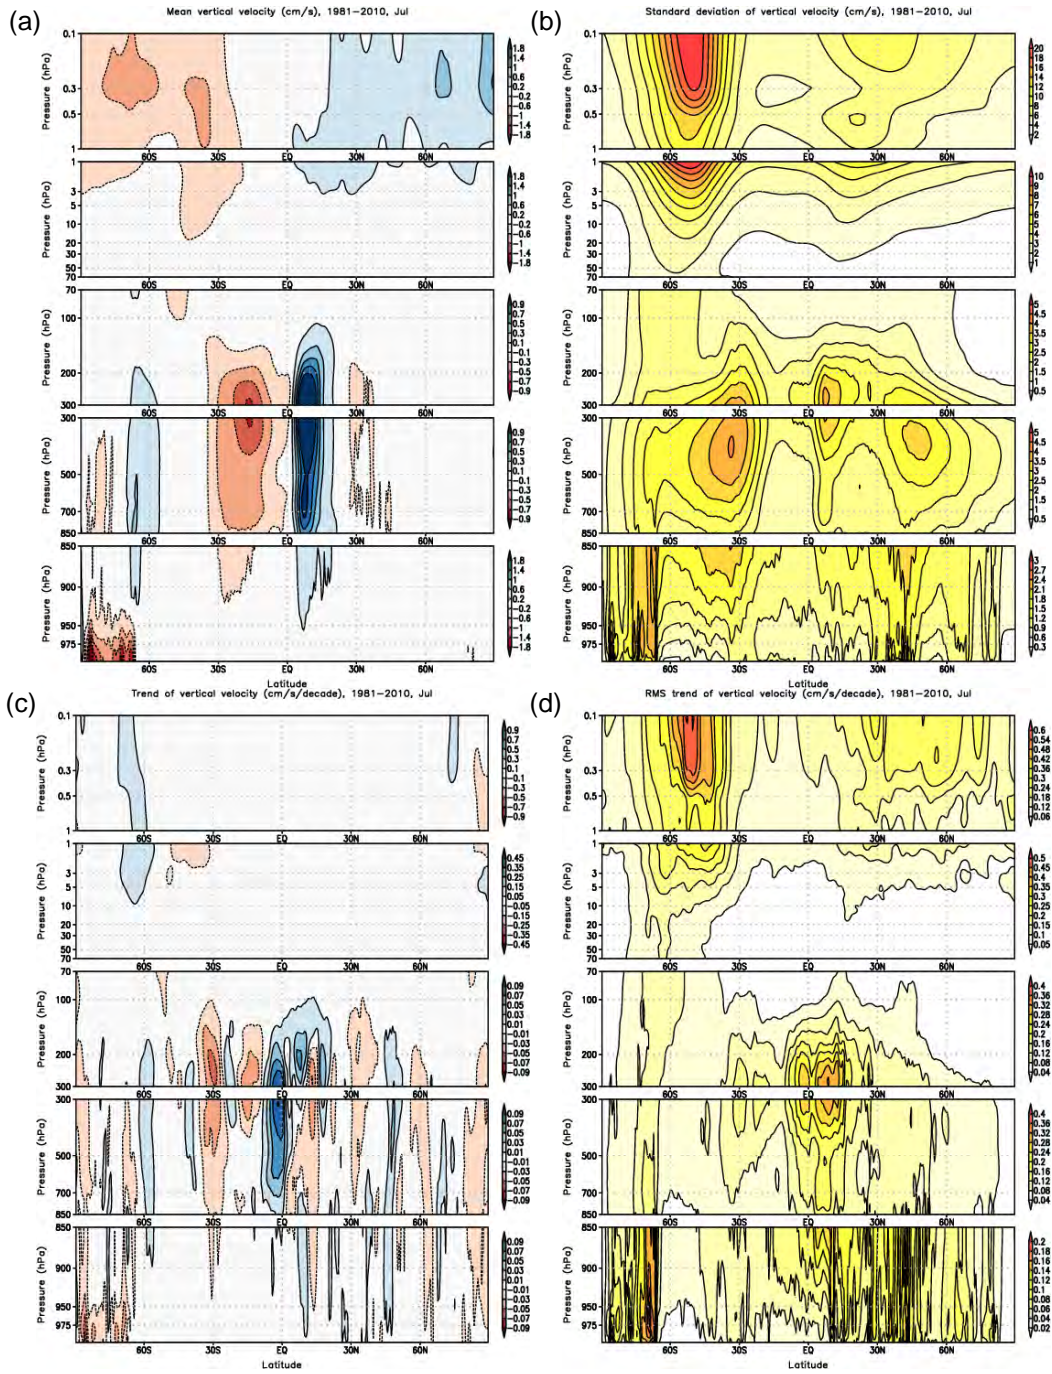


Figure 5. As Figure 4. but for July.

## 2.3 ECV: Upper-air water vapour

### 2.3.1 ECV Product: Water Vapour Mixing Ratio in the Upper Troposphere and Lower Stratosphere

Name	Water Vapour Mixing Ratio in the Upper Troposphere and Lower Stratosphere				
Definition	3D field of water vapour mixing ratios in the UTLS. Mixing ratio is the mole fraction of a substance in dry air.				
Unit	ppm				
Note	Consistency with temperature requirements for the same layer was used as a primary guiding consideration for horizontal resolution. Vertical resolution needed for determining fine layer cirrus and complex tropopause				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	
			B	100	
			T	500	
Vertical Resolution	km		G	0.01	
			B	0.1	
			T	0.25	
Temporal Resolution	h		G	3	
			B	6	
			T	24	
Timeliness	h		G	1	
			B	120	
			T	720	
Required Measurement Uncertainty (2-sigma)	ppmv		G	0.1	Dessler et al. (2013) Solomon et al. (2010) Uncertainty requirements are based on interannual variability and data quality needed to study supersaturation and dehydration.
			B	0.25	
			T	0.5	
Stability	ppmv/decade		G	<0.1	Dessler et al. (2013) Solomon et al. (2010) Stability requirements are based on magnitudes of seasonal and longer-term trends.
			B	0.1	
			T	0.25	
Standards and References	Dessler, A. E., Schoeberl, M. R., Wang, T., Davis, S. M., & Rosenlof, K. H. (2013). Stratospheric water vapor feedback. <i>Proceedings of the National Academy of Sciences of the United States of America</i> , 110(45), 18087–18091. doi:10.1073/pnas.1310344110				
	Solomon, S., Rosenlof, K. H., Portmann, R. W., Daniel, J. S., Davis, S. M., Sanford, T. J., & Plattner, G.-K. (2010). Contributions of Stratospheric Water Vapor to Decadal Changes in the Rate of Global Warming. <i>Science</i> , 327(5970), 1219-1223. doi:10.1126/science.1182488				



### 2.3.2 ECV Product: Water Vapour Mixing Ratio in the Middle and Upper Stratosphere

Name	Water Vapour Mixing Ratio in the Middle and Upper Stratosphere				
Definition	3D field of water vapor mixing ratios in the middle and upper stratosphere. Mixing ratio is the mole fraction of a substance in dry air.				
Unit	ppm				
Note	Consistency with temperature requirements for the same layer was used as a primary guiding consideration for horizontal resolution. However, for the breakthrough, there is no justification to use the same value as for temperature that is significantly smaller.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	50	
			B	500	
			T	1500	
Vertical Resolution	km		G	0.5	
			B	1	
			T	3	
Temporal Resolution	h		G	3	
			B	6	
			T	72	
Timeliness	h		G	1	
			B	168	
			T	720	
Required Measurement Uncertainty (2-sigma)	ppmv	.	G	0.1	Dessler et al. (2013) Solomon et al. (2010) Uncertainty requirements are based on observed seasonal and interannual variability.
			B	0.25	
			T	0.5	
Stability	ppmv/decade		G	<0.2	Dessler et al. (2013) Solomon et al. (2010) Stability requirements are based on magnitudes of longer-term trends.
			B	0.2	
			T	0.5	
Standards and References	<p>Dessler, A. E., Schoeberl, M. R., Wang, T., Davis, S. M., &amp; Rosenlof, K. H. (2013). Stratospheric water vapor feedback. <i>Proceedings of the National Academy of Sciences of the United States of America</i>, 110(45), 18087–18091. doi:10.1073/pnas.1310344110</p> <p>Solomon, S., Rosenlof, K. H., Portmann, R. W., Daniel, J. S., Davis, S. M., Sanford, T. J., &amp; Plattner, G.-K. (2010). Contributions of Stratospheric Water Vapor to Decadal Changes in the Rate of Global Warming. <i>Science</i>, 327(5970), 1219-1223. doi:10.1126/science.1182488</p>				

### 2.3.3 ECV Product: Water Vapour Mixing Ratio in the Mesosphere

Name	Water Vapour Mixing Ratio in the Mesosphere				
Definition	3D field of water vapour mixing ratios in the mesosphere. Mixing ratio is the mole fraction of a substance in dry air.				
Unit	ppm				
Note	Consistency with temperature requirements for the same layer was used as a primary guiding consideration for horizontal resolution. However, for the breakthrough, there is no justification to use the same value as for temperature that is significantly smaller.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	50	
			B	500	
			T	1500	
Vertical Resolution	km		G	0.5	
			B	1	
			T	3	
Temporal Resolution	h		G	3	
			B	6	
			T	72	
Timeliness	h		G	1	
			B	168	
			T	720	
Required Measurement Uncertainty (2-sigma)	ppmv	.	G	0.1	Dessler et al. (2013) Solomon et al. (2010) Uncertainty requirements are based on observed seasonal and interannual variability.
			B	0.25	
			T	0.5	
Stability	ppmv/decade		G	<0.2	Dessler et al. (2013) Solomon et al. (2010) Stability requirements are based on magnitudes of longer-term trends.
			B	0.2	
			T	0.5	
Standards and References	Dessler, A. E., Schoeberl, M. R., Wang, T., Davis, S. M., & Rosenlof, K. H. (2013). Stratospheric water vapor feedback. <i>Proceedings of the National Academy of Sciences of the United States of America</i> , 110(45), 18087–18091. doi:10.1073/pnas.1310344110				
	Solomon, S., Rosenlof, K. H., Portmann, R. W., Daniel, J. S., Davis, S. M., Sanford, T. J., & Plattner, G.-K. (2010). Contributions of Stratospheric Water Vapor to Decadal Changes in the Rate of Global Warming. <i>Science</i> , 327(5970), 1219-1223. doi:10.1126/science.1182488				

### 2.3.4 ECV Product: Relative Humidity in the Boundary Layer

Name	Relative Humidity in the Boundary Layer				
Definition	3D field of the relative humidity in the PBL. Relative humidity is the amount of water vapor in air divided by the temperature-dependent amount of water vapor in saturated air. RH can be expressed relative to water or ice saturation (to be specified in the metadata).				
Unit	%				
Note	Vertical resolution is required for calculation of fluxes in the lower part of the boundary layer. McCarthy, 2007 notes significant spatial heterogeneity related to latitude of the observation.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	McCarthy, (2007), consistency with T
			B	100	McCarthy, (2007)
			T	500	McCarthy, (2007)
Vertical Resolution	m		G	1	
			B	10	
			T	100	
Temporal Resolution	h		G	Sub-hourly(<1)	
			B	1	
			T	3	
Timeliness	h		G	1	
			B	120	
			T	720	
Required Measurement Uncertainty (2-sigma)	%RH		G	0.1	
			B	0.5	
			T	1	
Stability	%RH/decade		G	0.1	Assumption that stability is per measurement system leads to partial cancellation across a network of sites performing measurements.
			B	0.5	
			T	1	
Standards and References	McCarthy, 2007 <a href="https://doi.org/10.1002/joc.1611">https://doi.org/10.1002/joc.1611</a>				

### 2.3.5 ECV Product: Relative Humidity in the Free Troposphere

Name	Relative Humidity in the Free Troposphere				
Definition	3D field of the relative humidity in the free troposphere. Relative humidity is the amount of water vapor in air divided by the temperature-dependent amount of water vapor in saturated air. RH can be expressed relative to water or ice saturation (to be specified in the metadata).				
Unit	%				
Note	McCarthy, 2007 notes significant spatial heterogeneity related to latitude of the observation.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	McCarthy, (2007)
			B	100	McCarthy, (2007)
			T	1000	McCarthy, (2007)
Vertical Resolution	km		G	0.01	
			B	0.1	
			T	1	
Temporal Resolution	h		G	Sub-hourly	
			B	1	
			T	3	
Timeliness	h		G	1	
			B	120	
			T	720	
Required Measurement Uncertainty (2-sigma)	%RH		G	0.1	
			B	0.5	
			T	1	
Stability	%RH/decade		G	0.1	
			B	0.5	
			T	1	
Standards and References	McCarthy, 2007 <a href="https://doi.org/10.1002/joc.1611">https://doi.org/10.1002/joc.1611</a>				

### 2.3.6 ECV Product: Relative Humidity in the Upper Troposphere and Lower Stratosphere

Name	Relative Humidity in the Upper Troposphere and Lower Stratosphere				
Definition	3D field of the relative humidity in the UTLS. Relative humidity is the amount of water vapor in air divided by the temperature-dependent amount of water vapor in saturated air. RH can be expressed relative to water or ice saturation (to be specified in the metadata).				
Unit	%				
Note	Vertical resolution needed for determining fine layer cirrus and complex tropopause				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	
			B	100	
			T	500	
Vertical Resolution	km		G	0.01	
			B	0.1	
			T	0.25	
Temporal Resolution	h		G	3	
			B	6	
			T	24	
Timeliness	h		G	1	
			B	120	
			T	720	
Required Measurement Uncertainty (2-sigma)	%RH		G	0.5	Dessler et al. (2013) Solomon et al. (2010) Uncertainty requirements are based on interannual variability and data quality needed to study supersaturation and dehydration.
			B	1	
			T	2	
Stability	%RH/decade		G	<0.5	Dessler et al. (2013) Solomon et al. (2010) Stability requirements are based on magnitudes of seasonal and longer-term trends.
			B	0.5	
			T	2	
Standards and References	<p>Dessler, A. E., Schoeberl, M. R., Wang, T., Davis, S. M., &amp; Rosenlof, K. H. (2013). Stratospheric water vapor feedback. <i>Proceedings of the National Academy of Sciences of the United States of America</i>, 110(45), 18087–18091. doi:10.1073/pnas.1310344110</p> <p>Solomon, S., Rosenlof, K. H., Portmann, R. W., Daniel, J. S., Davis, S. M., Sanford, T. J., &amp; Plattner, G.-K. (2010). Contributions of Stratospheric Water Vapor to Decadal Changes in the Rate of Global Warming. <i>Science</i>, 327(5970), 1219-1223. doi:10.1126/science.1182488</p>				

### 2.3.7 ECV Product: Specific Humidity in the Boundary Layer

Name	Specific Humidity in the Boundary Layer				
Definition	3D field of the specific humidity in the PBL. The specific humidity is the ratio between the mass of water vapour and the mass of moist air.				
Unit	g/Kg				
Note	Vertical resolution is required for calculation of fluxes in the lowermost boundary layer. McCarthy, 2007 notes significant spatial heterogeneity related to latitude of the observation.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	McCarthy, (2007)
			B	100	McCarthy, (2007)
			T	500	McCarthy, (2007)
Vertical Resolution	m		G	1	
			B	10	
			T	100	
Temporal Resolution	h		G	Sub-hourly	
			B	1	
			T	3	
Timeliness	h		G	1	
			B	120	
			T	720	
Required Measurement Uncertainty (2-sigma)	g/Kg		G	0.1	
			B	0.5	
			T	1	
Stability	g/Kg/decade		G	0.01	
			B	0.05	
			T	0.1	
Standards and References	McCarthy, 2007 <a href="https://doi.org/10.1002/joc.1611">https://doi.org/10.1002/joc.1611</a>				

### 2.3.8 ECV Product: Specific Humidity in the Free Troposphere

Name	Specific Humidity in the Free Troposphere				
Definition	3D field of the specific humidity in the free troposphere. The specific humidity is the ratio between the mass of water vapour and the mass of moist air.				
Unit	g/Kg				
Note	McCarthy 2007) notes significant spatial heterogeneity related to latitude of the observation.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	15	McCarthy, (2007)
			B	100	McCarthy, (2007)
			T	1000	McCarthy, (2007)
Vertical Resolution	km		G	0.01	
			B	0.1	
			T	1	
Temporal Resolution	h		G	Sub-hourly	
			B	1	
			T	3	
Timeliness	h		G	1	
			B	120	
			T	720	
Required Measurement Uncertainty (2-sigma)	g/Kg	.	G	0.1	
			B	0.5	
			T	1	
Stability	g/Kg/decade		G	0.01	
			B	0.05	
			T	0.1	
Standards and References	McCarthy, 2007 <a href="https://doi.org/10.1002/joc.1611">https://doi.org/10.1002/joc.1611</a>				

### 2.3.9 ECV Product: Integrated Water Vapour

Name	Integrated Water Vapour				
Definition	Total amount of water vapour present in a vertical atmospheric column.				
Unit	Kg/m <sup>2</sup>				
Note	Implicit assumption that IWV is intrinsically linked to boundary layer and surface humidity given the predominance of the water vapour in these regions in contributing to the column total. Because IWV scales with temperature, uncertainty and stability should be split latitudinally. The applied values here are for mid-latitude locations. They would be stricter (more relaxed) for polar (tropical) locations and in winter than summer.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	25	
			B	250	
			T	1000	
Vertical Resolution	N/A		G	N/A	
			B	N/A	
			T	N/A	
Temporal Resolution	h		G	0.20	
			B	1	
			T	24	
Timeliness	h		G	24	
			B	120	
			T	720	
Required Measurement Uncertainty (2-sigma)	Kg/m <sup>2</sup>		G	0.1	Vary by latitude (see notes)
			B	0.5	
			T	1	
Stability	Kg/m <sup>2</sup> /decade		G	0.1	Vary by latitude (see notes)
			B	0.2	
			T	0.5	
Standards and References					



### 2.3.10 ECV Product: Snow Thickness

Name	Snow Depth				
Definition	Snow thickness is the perpendicular distance between snowpack surface and the underlying surface (ground, sea ice, lake ice, ice sheets, on ice shelves, glaciers, etc.				
Unit	m – average over a grid cell				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km	Size of grid cell	G	1	In complex terrain
			B	5	
			T	25	The resolution 1km refers to the homogeneous snow coverage in the flat field and high local variation in the mountain areas.
Vertical Resolution	mm	Depth of snow - the perpendicular distance between snowpack surface and the underlying ground	G		
			B		
			T		
Temporal Resolution	days	time	G	6	
			B	24	
			T	48	The frequency "Daily" refers to the rapid changing cycle retrieved by satellite observation
Timeliness			G	3 hours	
			B	1	
			T	10	
Required Measurement Uncertainty (2-sigma)	mm	2 Standard Deviations	G		
			B		
			T	1	
Stability	mm		G	1	
			B	5	
			T	25	The stability is recommended to be better than "10 mm".
Standards and References	<ul style="list-style-type: none"> <li>• Frei, A., Tedesco, M., Lee, S., Foster, J., Hall, D. K., Kelly, R. and Robinson, D. A. (2012): A review of global satellite-derived snow products, <i>Advances in Space Research</i>, 50, 1007–1029.</li> <li>• Goodison, B. and Walker, A. (1994): Canadian development and use of snow cover information from passive microwave satellite data, B. Choudhury et al. (ed), <i>Passive Microwave Remote Sensing of Land-Atmosphere Interaction</i>, Utrecht: VSP BV, 245-262.</li> <li>• Robinson, D.A. (2013): Climate Data Record Program (CDRP): Climate Algorithm Theoretical Basis Document (C-ATBD) Northern Hemisphere Snow Cover Extent, CDRPATBD-0156. Asheville, North Carolina, USA 28 pp.</li> <li>• Sturm, M., Taras, B., Liston, G. E., Derksen, C., Jonas, T. and Lea, J. (2010): Estimating Snow Water Equivalent Using Snow Depth Data and Climate Classes. <i>Jour. Hydromet.</i> 11, 1380-1394.</li> </ul>				

### 2.3.11 ECV Product: Area Covered by Snow

Name	Area Covered by Snow				
Definition	Snow cover refers to the area of solid surface (ground, ice sea ice, lake ice, glaciers etc.) covered by snow at a given time				
Unit	m <sup>2</sup> – average over a grid cell				
Note	Area covered by snow is observed in-situ and satellite observation (Robinson, 2013; Frei et al., 2012). The visible satellite identifies the snow cover with few millimeters of snow depth. The microwave radiometer can detect at first from few centimeters of snow depth.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	m	Size of grid cell	G	1	The resolution 1km refers to the homogeneous snow coverage in the flat field and high local variation in the mountain areas.
			B	5	
			T	25	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	days	Frequency of measurement	G	6	The frequency "Daily" refers to the rapid changing cycle retrieved by satellite observation.
			B	24	
			T	48	
Timeliness			G	3 hours	
			B	1	
			T	10	
Required Measurement Uncertainty (2-sigma)	%	2 Standard Deviations	G		The Required Measurement Uncertainty (2-sigma) "5 %, local accuracy for 1/3 of 100m and 1km" refers to the complexity of snow cover edge.
			B		
			T	5 %, local accuracy for 1/3 of 100m and 1km	
Stability			G	Missing	
			B		
			T	4%	
Standards and References	<ul style="list-style-type: none"> <li>• Frei, A., Tedesco, M., Lee, S., Foster, J., Hall, D. K., Kelly, R. and Robinson, D. A. (2012): A review of global satellite-derived snow products, <i>Advances in Space Research</i>, 50, 1007–1029.</li> <li>• Goodison, B. and Walker, A. (1994): Canadian development and use of snow cover information from passive microwave satellite data, B. Choudhury et al. (ed), <i>Passive Microwave Remote Sensing of Land-Atmosphere Interaction</i>, Utrecht: VSP BV, 245-262.</li> <li>• Robinson, D.A. (2013): Climate Data Record Program (CDRP): Climate Algorithm Theoretical Basis Document (C-ATBD) Northern Hemisphere Snow Cover Extent, CDRPATBD-0156. Asheville, North Carolina, USA 28 pp.</li> <li>• Sturm, M., Taras, B., Liston, G. E., Derksen, C., Jonas, T. and Lea, J. (2010): Estimating Snow Water Equivalent Using Snow Depth Data and Climate Classes. <i>Jour. Hydromet.</i> 11, 1380-1394.</li> </ul>				

## 2.4 ECV: Earth radiation budget

### 2.4.1 ECV Product: Radiation Profile

Name	Radiation Profile				
Definition	Vertical profile of upward and downward LW and SW radiation components				
Unit	W/m2				
Note	For the application area of global climate monitoring no requirements exist. Thus the requirements of the individual components are taken				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B	50	
			T	100	
Vertical Resolution	km		G	1	
			B	2	
			T	4	
Temporal Resolution	h		G	1	
			B	24	
			T	720	resolving diurnal cycle
Timeliness	h		G	1	
			B	24	
			T	720	
Required Measurement Uncertainty (2-sigma)	W/m2		G	0.1/0.2	Shortwave radiation/Longwave radiation A factor of 2 was applied to gain the breakthrough value and a factor of 4 was applied to estimate the threshold value.
			B	0.2/0.4	
			T	0.4/0.8	
Stability	W/m2/decade		G	0.025/0.05	Shortwave radiation/Longwave radiation
			B	0.05/0.1	
			T	0.1/0.2	
Standards and References					

### 2.4.2 ECV Product: Solar Spectral Irradiance

Solar Spectral Irradiance					
<b>Name</b>	Solar Spectral Irradiance				
<b>Definition</b>	Downward Short-Wave Irradiance at Top of the Atmosphere when measured as a function of wavelength it is the spectral irradiance				
<b>Unit</b>	W/m <sup>2</sup> /μm				
<b>Note</b>	Downward Short-Wave Irradiance at Top of the Atmosphere is also known as Total Spectral Irradiance (TSI)				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	N/A		G		
			B		
			T		
Spectral resolution	< 290 nm 290-1000 nm 1000-1600 nm 1600-3200 nm 3200-6400 nm 6400-10020nm 10020-160000 nm		G		
			B	1nm	
				2nm	
				5nm	
				10nm	
				20nm	
				40nm	
				20000nm	
				T	
Temporal Resolution	hr		G		
			B		
			T	24	
Timeliness	hr		G		
			B		
			T	24	
Required Measurement Uncertainty (2-sigma)	%		G	0.3	(200-3000 nm)
			B	1.5	
			T	3	
Stability	% /decade		G	0.03	(200-3000 nm)
			B	0.15	
			T	0.3	
<b>Standards and References</b>					

### 2.4.3 ECV Product: Downward Short-Wave Irradiance at Top of the Atmosphere

Name	Downward Short-Wave Irradiance at Top of the Atmosphere				
Definition	Flux density of the solar radiation at the top of the atmosphere				
Unit	W/m <sup>2</sup>				
Note	This EVC is formerly/also known as Total Solar Irradiance (TSI).				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G		
			B		
			T		
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	hr		G		
			B		
			T	24	
Timeliness	hr		G	1	
			B	24	
			T	720	
Required Measurement Uncertainty (2-sigma)	W/m <sup>2</sup>		G	0.04	
			B	0.08	
			T	0.12	
Stability	W/m <sup>2</sup> /decade		G	0.01	
			B	0.02	
			T	0.04	
Standards and References					

#### 2.4.4 ECV Product: Upward Short-Wave Irradiance at Top of the Atmosphere

Name	Upward Short-Wave Irradiance at Top of the Atmosphere				
Definition	Flux density of solar radiation, reflected by the Earth surface and atmosphere, emitted to space at the top of the atmosphere				
Unit	W/m <sup>2</sup>				
Note	The measurand for this ECV is radiance (W·sr <sup>-1</sup> ·m <sup>-2</sup> ). The current approach adopted by the Clouds and Earth's Radiant Energy System (CERES) is to derive irradiances (Wm <sup>-2</sup> ) from measured radiances using observed anisotropy factors over various scene types.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B	50	
			T	100	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	hr		G	1	
			B	24	Resolves the diurnal cycle
			T	720	Allows a regional monitoring
Timeliness	hr		G	1	
			B	24	
			T	720	
Required Measurement Uncertainty (2-sigma)	W/m <sup>2</sup>		G	0.2	NOAA Tech Rep. NESDIS 134; Ohring et al. 2003 (2005) A factor of 2 was applied to gain the breakthrough value and a factor of 4 was applied to estimate the threshold value.
			B	0.5	
			T	1	
Stability	W/m <sup>2</sup> /decade		G	0.06	NOAA Tech Rep. NESDIS 134
			B	0.15	
			T	0.3	
Standards and References	Ohring 2004 Ohring 2005 NOAA Tech Rep. NESDIS 134				

## 2.4.5 ECV Product: Upward Long-Wave Irradiance at Top of the Atmosphere

Name	Upward Long-Wave Irradiance at Top of the Atmosphere				
Definition	Flux density of terrestrial radiation emitted by the Earth surface and the gases, aerosols and clouds of the atmosphere at the top of the atmosphere				
Unit	W/m <sup>2</sup>				
Note	The measurand for this ECV is radiance (W·sr <sup>-1</sup> ·m <sup>-2</sup> ). The current approach adopted by the Clouds and Earth's Radiant Energy System (CERES) is to derive irradiances (Wm <sup>-2</sup> ) from measured radiances using observed anisotropy factors over various scene types.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B	50	
			T	100	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	hr		G	1	
			B	24	Daily resolves the diurnal cycle
			T	720	Monthly allows a regional monitoring
Timeliness	hr		G	1	
			B	24	
			T	720	
Required Measurement Uncertainty (2-sigma)	W/m <sup>2</sup>		G	0.2	NOAA Tech Rep. NESDIS 134; Ohring et al. 2003 / 2005) A factor of 2 was applied to gain the breakthrough value and a factor of 4 was applied to estimate the threshold value.
			B	0.5	
			T	1	
Stability	W/m <sup>2</sup> /decade		G	0.05	NOAA Tech Rep. NESDIS 134 Requirements for decadal stability and bias can be derived from theoretical assumptions about the minimum anticipated signal to detect climate trends (Ohring 2004, 2005). Ohring et al. assume the required stability to be 1/5 of the expected climate signal. To detect a climate signal the stability should be better than 10 % of the uncertainty.
			B	0.1	
			T	0.2	
Standards and References	Ohring 2004 Ohring 2005 NOAA Tech Rep. NESDIS 134				

## 2.5 ECV Cloud Properties

### 2.5.1 ECV Product: Cloud cover

Name	Cloud Cover				
Definition	2D field of fraction of sky filled by cloud				
Unit	Unitless (percentage)				
Note	These requirements include: Global, continental, and regional Climate monitoring, feedback and improved knowledge about the interaction between clouds, aerosols and atmospheric gases				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	25	To perform regional climate monitoring. Higher spatial resolution is needed with a resolution as high as 10 km required for resolving convective clouds in the tropics.
			B	100	To perform continental climate monitoring
			T	500	Global climate monitoring is performed on a monthly time scale with an averaged global number for which ~500 km for horizontal resolution is sufficient.
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hr		G	1	To resolve the diurnal cycle for all kinds of clouds on the global scale and investigating cloud related climate feedbacks which are e.g. connected to rainfall, surface temperature, convection demand a temporal observing resolution of hourly to daily.
			B	24	To perform climate monitoring of clouds on the global scale, a daily observing cycle will be sufficient.
			T	720	To characterize seasonal and interannual changes
Timeliness	hr		G	1	
			B	3	
			T	12	
Required Measurement Uncertainty (2-sigma)	%		G	3	Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	6	
			T	12	
Stability	% / decade		G	0.3	Ohring et al. 2005 Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	0.6	
			T	1.2	
Standards and References	Ohring et al. 2005: <a href="https://doi.org/10.1175/BAMS-86-9-1303">https://doi.org/10.1175/BAMS-86-9-1303</a>				



## 2.5.2 ECV Product: Cloud Liquid Water Path

Name	Cloud Liquid Water Path				
Definition	2D Field of atmospheric water in the liquid phase (precipitating or not), integrated over the total column				
Unit	kg/m <sup>2</sup>				
Note	This variable is identical to the also used "Cloud liquid water total column" which is given in g/m <sup>2</sup> and often used in NWP and climate models. The uncertainty values are below would then by re-scaled from kg/m <sup>2</sup> to g/m <sup>2</sup> . These requirements include: Global, continental, and regional Climate monitoring, feedback and improved knowledge about the interaction between clouds, aerosols and atmospheric gases.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	25	To perform regional climate monitoring. Higher spatial resolution is needed with a resolution as high as 10 km required for resolving convective clouds in the tropics.
			B	100	To perform continental climate monitoring.
			T	500	Global climate monitoring is performed on a monthly time scale with an averaged global number for which ~500 km for horizontal resolution is sufficient.
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hr		G	1	To resolve the diurnal cycle for all kinds of clouds on the global scale and investigating cloud related climate feedbacks which are e.g. connected to rainfall, surface temperature, convection demand a temporal observing resolution of hourly to daily.
			B	24	To perform climate monitoring of clouds on the global scale, a daily to monthly observing cycle will be sufficient.
			T	720	To characterize seasonal and interannual changes
Timeliness	hr		G	1	
			B	3	
			T	12	
Required Measurement Uncertainty (2-sigma)	kg/m <sup>2</sup>		G	0.05	Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	0.1	
			T	0.2	
Stability	kg/m <sup>2</sup> /decade		G	0.005	Ohring et al. 2005
			B	0.01	Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			T	0.02	
Standards and References	Ohring et al. 2005: <a href="https://doi.org/10.1175/BAMS-86-9-1303">https://doi.org/10.1175/BAMS-86-9-1303</a>				

### 2.5.3 ECV Product: Cloud Ice Water Path

Name	Cloud Ice Water Path				
Definition	2D Field of atmospheric water in the solid phase (precipitating or not), integrated over the total column				
Unit	kg/m <sup>2</sup>				
Note	This variable is identical to the also used "Cloud ice water total column" which is given in g/m <sup>2</sup> and often used in NWP and climate models. The uncertainty values are below would then by re-scaled from kg/m <sup>2</sup> to g/m <sup>2</sup> . These requirements include: Global, continental, and regional Climate monitoring, feedback and improved knowledge about the interaction between clouds, aerosols and atmospheric gases.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	25	To perform regional climate monitoring. Higher spatial resolution is needed with a resolution as high as 10 km required for resolving convective clouds in the tropics.
			B	100	To perform continental climate monitoring.
			T	500	Global climate monitoring is performed on a monthly time scale with an averaged global number for which ~500 km for horizontal resolution is sufficient.
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hr		G	1	To resolve the diurnal cycle for all kinds of clouds on the global scale and investigating cloud related climate feedbacks which are e.g. connected to rainfall, surface temperature, convection demand a temporal observing resolution of hourly to daily.
			B	24	To perform climate monitoring of clouds on the global scale, a daily to monthly observing cycle will be sufficient.
			T	720	To characterized seasonal and interannual changes
Timeliness	hr		G	1	
			B	3	
			T	12	
Required Measurement Uncertainty (2-sigma)	kg/m <sup>2</sup>		G	0.05	Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	0.1	
			T	0.2	
Stability	kg/m <sup>2</sup> /decade		G	0.005	Ohring et al. 2005 Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	0.01	
			T	0.02	
Standards and References	Ohring et al. 2005: <a href="https://doi.org/10.1175/BAMS-86-9-1303">https://doi.org/10.1175/BAMS-86-9-1303</a>				

## 2.5.4 ECV Product: Cloud Drop Effective Radius

Name	Cloud Drop Effective Radius				
Definition	Ratio of integral of water droplets size distribution in volume divided by integral in area ( $\mu\text{m}$ )				
Unit	$\mu\text{m}$				
Note	These requirements include: Global, continental, and regional Climate monitoring, feedback and improved knowledge about the interaction between clouds, aerosols and atmospheric gases. Requirements for this ECV is are for the cloud top				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	25	To perform regional climate monitoring. Higher spatial resolution is needed with a resolution as high as 10 km required for resolving convective clouds in the tropics.
			B	100	To perform continental climate monitoring
			T	500	Global climate monitoring is performed on a monthly time scale with an averaged global number for which ~500 km for horizontal resolution is sufficient.
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hr		G	1	To resolve the diurnal cycle for all kinds of clouds on the global scale and investigating cloud related climate feedbacks which are e.g. connected to rainfall, surface temperature, convection demand a temporal observing resolution of hourly to daily.
			B	24	To perform climate monitoring of clouds on the global scale, a daily to monthly observing cycle will be sufficient.
			T	720	To characterize seasonal and interannual changes
Timeliness	hr		G	1	
			B	3	
			T	12	
Required Measurement Uncertainty (2-sigma)	$\mu\text{m}$	As metric the uncertainty (RMS) is chosen which is given for 1-sigma	G	1/2	Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value
			B	2/4	
			T	4/8	
Stability	$\mu\text{m}$ /decade		G	0.1/0.2	Values given separately for cloud water and ice effective particle size as water/ice. Ohring et al. 2005 specifies stability and accuracy requirements separately for cloud water particle size as percentage forcing, and ice particle size as percentage feedback. Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	0.2/0.4	
			T	0.4/0.8	
Standards and References					

## 2.5.5 ECV Product: Cloud Optical Depth

Name	Cloud Optical Depth				
Definition	Effective depth of a cloud from the viewpoint of radiation extinction. $OD = \exp(-K \cdot \Delta z)$ where K is the extinction coefficient [ $\text{km}^{-1}$ ], $\Delta z$ the vertical path [km] between the base and the top of the cloud and the reference wavelength to be specified in the metadata.				
Unit	Dimensionless (percentage)				
Note	These requirements include: Global, continental, and regional Climate monitoring, feedback and improved knowledge about the interaction between clouds, aerosols and atmospheric gases.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	25	To perform regional climate monitoring. Higher spatial resolution is needed with a resolution as high as 10 km required for resolving convective clouds in the tropics.
			B	100	To perform continental and regional climate monitoring higher spatial resolution is needed
			T	500	Global climate monitoring is performed on a monthly time scale with an averaged global number for which ~500 km for horizontal resolution is sufficient.
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hr		G	1	To resolve the diurnal cycle for all kinds of clouds on the global scale and investigating cloud related climate feedbacks which are e.g. connected to rainfall, surface temperature, convection demand a temporal observing resolution of hourly to daily.
			B	24	To perform Performing climate monitoring of clouds on the global scale, a daily to monthly observing cycle will be sufficient.
			T	720	To characterize seasonal and interannual changes
Timeliness	hr		G	1	
			B	3	
			T	12	
Required Measurement Uncertainty (2-sigma)	%		G	20	Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	40	
			T	80	
Stability	%/decade		G	2.0	Ohring et al. 2005 lists the stability requirements for cloud optical thickness as 2% with a 10% accuracy. Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	4.0	
			T	8.0	
Standards and References	Ohring et al. 2005: <a href="https://doi.org/10.1175/BAMS-86-9-1303">https://doi.org/10.1175/BAMS-86-9-1303</a>				

## 2.5.6 ECV Product: Cloud Top Temperature

Name	Cloud Top Temperature				
Definition	Temperature of the top of the cloud (highest cloud in case of multi-layer clouds)				
Unit	K				
Note	These requirements include: Global, continental, and regional Climate monitoring, feedback and improved knowledge about the interaction between clouds, aerosols and atmospheric gases.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	25	To perform regional climate monitoring. Higher spatial resolution is needed with a resolution as high as 10 km required for resolving convective clouds in the tropics.
			B	100	To perform continental and regional climate monitoring higher spatial resolution is needed
			T	500	Global climate monitoring is performed on a monthly time scale with an averaged global number for which ~500 km for horizontal resolution is sufficient.
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hr		G	1	To resolve the diurnal cycle for all kinds of clouds on the global scale and investigating cloud related climate feedbacks which are e.g. connected to rainfall, surface temperature, convection demand a temporal observing resolution of hourly to daily.
			B	24	To perform Performing climate monitoring of clouds on the global scale, a daily to monthly observing cycle will be sufficient.
			T	720	To characterize seasonal and interannual changes
Timeliness	hr		G	1	
			B	3	
			T	12	
Required Measurement Uncertainty (2-sigma)	K		G	2	Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	4	
			T	8	
Stability	K/decade		G	0.2	Ohring et al. 2005 lists the stability requirement for cloud top temperature as 0.2K/cloud emissivity per decade with accuracy as 1 K/cloud emissivity per decade. Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	0.4	
			T	0.8	
Standards and References	Ohring et al. 2005: <a href="https://doi.org/10.1175/BAMS-86-9-1303">https://doi.org/10.1175/BAMS-86-9-1303</a>				

## 2.5.7 ECV Product: Cloud Top Height

Name	Cloud Top Height				
Definition	Height of the top of the cloud (highest cloud in case of multi-layer clouds)				
Unit	km				
Note	These requirements include: Global, continental, and regional Climate monitoring, feedback and improved knowledge about the interaction between clouds, aerosols and atmospheric gases. 3-D cloud top information are required where possible. This can be achieved via a combination of cloud optical depth vs cloud top height histograms				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	25	To perform regional climate monitoring. Higher spatial resolution is needed with a resolution as high as 10 km required for resolving convective clouds in the tropics.
			B	100	To perform continental and regional climate monitoring higher spatial resolution is needed
			T	500	Global climate monitoring is performed on a monthly time scale with an averaged global number for which ~500 km for horizontal resolution is sufficient.
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hr		G	1	To resolve the diurnal cycle for all kinds of clouds on the global scale and investigating cloud related climate feedbacks which are e.g. connected to rainfall, surface temperature, convection demand a temporal observing resolution of hourly to daily.
			B	24	To perform climate monitoring of clouds on the global scale, a daily to monthly observing cycle will be sufficient.
			T	720	To characterize seasonal and interannual changes
Timeliness	hr		G	1	
			B	3	
			T	12	
Required Measurement Uncertainty (2-sigma)	km		G	0.30	Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	0.60	
			T	1.2	
Stability	km/decade		G	0.03	Ohring et al. 2005 lists the required stability for cloud top height as 30 m/decade with accuracy of 150 m/decade. Breakthrough is estimated with a factor of 2 times the goal value, whereas the threshold is calculated with a factor of 4 times the goal value.
			B	0.06	
			T	0.12	
Standards and References	Ohring et al. 2005: <a href="https://doi.org/10.1175/BAMS-86-9-1303">https://doi.org/10.1175/BAMS-86-9-1303</a>				

## 2.6 ECV: Lightning

### 2.6.1 ECV Product: Schumann Resonances

Name		Schumann Resonances			
Definition	Extremely Low Frequency (ELF) magnetic and electric field of the three first resonance modes (8 Hz, 14 Hz, 20 Hz).				
Unit	picoTesla2/Hz (magnetic field); volt2/m2/Hz (electric field)				
Note	Regular measurements of two horizontal magnetic field components at a location are enough to monitor globally Schumann Resonances. The magnetic field should be monitored at a level of ~0.1 picoTesla2/Hz. Additionally, to the magnetic measurements, one vertical electric measurement would document the full transverse electromagnetic (TEM) waveguide component at any given location. Note the estimate of the electric intensity assumes the wave impedance is half that of free space (377 ohms). In this context, the electric field should be monitored at a level of ~2.3 x 10 <sup>-9</sup> V2/m2/Hz.).				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	N/A		G		
			B		
			T		
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	day		G	1/24	Suitable for investigation of the strong diurnal variation of tropical "chimney" regions and for use in multi-station inversion methods for global lightning activity
			B	1	Suitable for investigation of intraseasonal variations (5-day wave; MJO)
			T	30	Suitable for investigation of the global seasonal and annual variation, and the interannual ENSO variation
Timeliness	day		G	1	For use in building a representative monthly estimate for climate purposes
			B	-	
			T	30	For climate-related studies; responsiveness of lightning to long-term temperature changes
Required Measurement Uncertainty (2-sigma)	femtoTesla2/Hz		G	1	Absolute coil calibration is feasible at the 1% level/ (Calibration of the vertical electric field is difficult, but possible)
			B	-	
			T	5	Absolute coil calibration at the 5% level
Stability	femtoTesla2/Hz		G	1	Given lightning sensitivity to temperature at the 10% per K level, one needs absolute calibration and stability at the 1% level to see fraction of 1K temperature changes
			B	-	-
			T	5	Coil calibration should be checked and maintained to at least this level
Standards and References	Nickolaenko, A.P. and M. Hayakawa, Resonances in the Earth-ionosphere cavity. Kluwer Academic Publisher, Dordrecht, London, 2002. Nickolaenko, A.P. and M. Hayakawa, Schumann Resonance for Tyros: Essentials of Global Electromagnetic Resonance in the Earth-ionosphere Cavity. Springer, Tokyo/Heidelberg/New York/Dordrecht/London, 2014. Polk, C., Schumann Resonances, in CRC Handbook of Atmospherics. Volume 1, Ed., H. Volland, CRC Press, Boca Raton, Florida, 1982. Satori G, V. Mushtak, and E. Williams, Schumann resonance signature of global lightning activity. In: Betz, HD, U. Schumann and P. Laroche (eds), Lightning: Principles, Instruments and Applications: Review of Modern Lightning Research. Springer, Berlin, pp 347-386. 2009. Sentman, D.D., Schumann Resonances. In Volland, H., Ed., Handbook of Atmospheric Electrodynamics, CRC Press, Boca Raton, 267-296, 1995.				

## 2.6.2 ECV Product: Total lightning stroke density

Name	Total lightning stroke density				
Definition	Total number of detected strokes in the corresponding time interval and the space unit. The space unit (grid box) should be on the order of the horizontal resolution and the accumulation time to the observing cycle.				
Unit	Strokes per square km/year				
Note	Data sets at the 1-map-per-month level require limited data storage, and thus should be simply posted on a publicly accessible website. The larger data sets reaching down to global resolutions of 0.1 degree with time resolution of a few hours should be maintained by the network managers, and provided to the user community as needed. Metadata should include sufficient information to validate the detection efficiency at the maximum spatial and temporal scales.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	Degree pixels		G	0.1x0.1	Thunderstorms are complex, with different dynamics in different parts of the storm, for example the updraft region and the trailing stratosphere region. Therefore the net influence on global currents and climatology is likely to be very different from different sub-storm scales.
			B	0.25x0.25	This is the convection scale and will help identify climate variability at the storm level
			T	1x1	Ideally these data would be provided as both maps as well as digital files, along with the Metadata with adequate time resolution to address both long term and short term detection efficiency variations within these data sets.
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	N/A
			T	N/A	N/A
Temporal Resolution	day		G	1/24	Lifetime of thunderstorm cell, diurnal cycle. For high resolution climatology, also necessary to validate thunder day data in order to extend time series of lightning activity back in time
			B	1	Weather patterns, weekly and intraseasonal patterns like MJO
			T	30	Climate Scale
Timeliness	day		G	10	For high resolution climatology. It can be important for special occasions to see direct impacts of events or mitigation immediately in order to react.
			B	30	Forecasting and model input
			T	365	For lightning climatology studies the provision of yearly data within one year of data collection, and to prepare their data back as far as it is available from their network is necessary.
Required Measurement Uncertainty (2-sigma)	dimensionless		G	1	For high resolution climatology, also necessary to validate thunder day data in order to extend time series of lightning activity back in time
			B	-	
			T	15	For climatologies
Stability	%		G	1	For high resolution climatology, also necessary to validate thunder day data in order to extend time series of lightning activity back in time
			B	-	-
			T	10	For climatologies
Standards and References	<p>Algorithm Theoretical Basis Document (ATBD) for L2 processing of the GOES-R Geostationary Lightning Mapper (GLM, Goodman et al., 2013) and MTG Lightning Imager data (Eumetsat, 2014) Meteosat Third Generation (MTG) End-User Requirements Document (EURD) (Eumetsat, 2010) GOES-R Product Definition and Users' Guide (PUG, Rev. 2018) and Data Book (Rev., 2019) Nag et al., 2015</p> <p>Virts, K.S. et al, 2013, Highlights of a New Ground-Based, Hourly Global Lightning Climatology, BAMS, 94 (9), <a href="https://doi.org/10.1175/BAMS-D-12-00082.1">https://doi.org/10.1175/BAMS-D-12-00082.1</a></p> <p>GOES-R Series, 2018. Product Definition and Users' Guide. Volume 3: Level 1b Products, 1 November 2018 DCN 7035538, Revision 2.0, available at <a href="https://www.goes-r.gov/users/docs/PUG-L1b-vol3.pdf">https://www.goes-r.gov/users/docs/PUG-L1b-vol3.pdf</a>.</p> <p>GOES-R Series Data Book, 2019. CDRL PM-14 Rev A. May 2019, NOAA-NASA. Available at <a href="https://www.goes-r.gov/downloads/resources/documents/GOES-RSeriesDataBook.pdf">https://www.goes-r.gov/downloads/resources/documents/GOES-RSeriesDataBook.pdf</a>.</p>				



### 3. ATMOSPHERIC COMPOSITION

#### 3.1 Greenhouse Gases

##### 3.1.1 ECV Product: N<sub>2</sub>O mole fraction

<b>Name</b>	<b>N<sub>2</sub>O mole fraction</b>				
<b>Definition</b>	3D field of amount of N <sub>2</sub> O (expressed in moles) divided by the total amount of all constituents in dry air (also expressed in moles)				
<b>Unit</b>	ppb				
<b>Note</b>	N <sub>2</sub> O was not an ECV product in the GCOS IP but should be added as it is a strong GHG.				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	100	
			B	500	
			T	2000	
<b>Vertical Resolution</b>	km		G	0.1	
			B	1	
			T	3	
<b>Temporal Resolution</b>	hr		G	1	
			B	24	well mixed
			T	168	well mixed
<b>Timeliness</b>	day		G	1	
			B	30	
			T	180	
<b>Required Measurement Uncertainty (2-sigma)</b>	ppb		G	0.05	Expert judgement and GAW Rep. No. 242 network compatibility
			B	0.1	Expert judgement and GAW Rep. No. 242 extended network compatibility
			T	0.3	Expert judgement, larger than B.
<b>Stability</b>	ppb/decade		G	0.05	Within accuracy
			B	0.05	Within accuracy/2
			T	0.2	Within accuracy/2
<b>Standards and References</b>	GAW Report, 242. 19 <sup>th</sup> WMO/IAEA Meeting on Carbon Dioxide, Other Greenhouse Gases and Related Measurement Techniques (GGMT-2017) Crowell Andrew; Steinbacher M.; World Meteorological Organization (WMO) - WMO, 2018 <a href="https://library.wmo.int/doc_num.php?explnum_id=5456">https://library.wmo.int/doc_num.php?explnum_id=5456</a>				

### 3.1.2 ECV Product: CO<sub>2</sub> mole fraction

Name	CO <sub>2</sub> mole fraction				
Definition	3D field of amount of CO <sub>2</sub> (Carbon dioxide, expressed in moles) divided by the total amount of all constituents in dry air (also expressed in moles)				
Unit	ppm				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	100	
			B	500	
			T	2000	
Vertical Resolution	km		G	0.1	
			B	1	
			T	3	
Temporal Resolution	hr		G	1	
			B	24	well-mixed
			T	168	well-mixed
Timeliness	day		G	1	
			B	30	
			T	180	
Required Measurement Uncertainty (2-sigma)	ppm		G	0.1	GAW Rep. No. 242
			B	0.2	GAW Rep. No. 242
			T	0.5	Expert judgement, larger than B.
Stability	ppm/decade		G	0.1	Within accuracy
			B	0.1	Within accuracy/2
			T	0.3	Within accuracy/2
Standards and References	GAW Report, 242. 19th WMO/IAEA Meeting on Carbon Dioxide, Other Greenhouse Gases and Related Measurement Techniques (GGMT-2017) Crotwell Andrew; Steinbacher M.; World Meteorological Organization (WMO) - WMO, 2018 <a href="https://library.wmo.int/doc_num.php?explnum_id=5456">https://library.wmo.int/doc_num.php?explnum_id=5456</a>				

### 3.1.3 ECV Product: CO<sub>2</sub> column average dry air mixing ratio

Name	CO <sub>2</sub> column average dry air mixing ratio				
Definition	2D column integrated number of molecules of the target gas (CO <sub>2</sub> ) divided by that of dry air expressed in mole fraction				
Unit	μmol/mol.				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	1	imaging
			B	5	~OCO-2/3
			T	10	CO <sub>2</sub> M, CEOS document - LEO, GEO
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hr		G	1	geostationary
			B	12	Blue report
			T	72	CO <sub>2</sub> M
Timeliness	day		G	1	
			B	7	
			T	14	
Required Measurement Uncertainty (2-sigma)	ppm		G	0.6	1-sigma: 0.3ppm TCCON / Green report
			B	1	1-sigma: 0.5ppm Expert judgment based on improving CO <sub>2</sub> M requirements
			T	1.6	1-sigma: 0.8ppm CO <sub>2</sub> M requirements, WMO Report #242
Stability	ppm/decade		G	0.1	Within accuracy / 5
			B	0.2	Within accuracy / 5
			T	0.3	Within accuracy / 5
Standards and References	<ul style="list-style-type: none"> <li>Blue Report, 2015: Towards a European Operational Observing System to Monitor Fossil CO<sub>2</sub> emissions <a href="https://www.copernicus.eu/sites/default/files/2019-09/CO2_Blue_report_2015.pdf">https://www.copernicus.eu/sites/default/files/2019-09/CO2_Blue_report_2015.pdf</a></li> <li>Red Report, 2017: Baseline Requirements, Model Components and Functional Architecture <a href="https://www.copernicus.eu/sites/default/files/2019-09/CO2_Red_Report_2017.pdf">https://www.copernicus.eu/sites/default/files/2019-09/CO2_Red_Report_2017.pdf</a></li> <li>Green Report, 2019: Needs and High Level Requirements for in situ Measurements <a href="https://www.copernicus.eu/sites/default/files/2019-09/CO2_Green_Report_2019.pdf">https://www.copernicus.eu/sites/default/files/2019-09/CO2_Green_Report_2019.pdf</a></li> <li>CO<sub>2</sub>M <a href="https://www.esa.int/Applications/Observing_the_Earth/Copernicus/Copernicus_High_Priority_Candidates">https://www.esa.int/Applications/Observing_the_Earth/Copernicus/Copernicus_High_Priority_Candidates</a></li> <li>MRD, v 2.0: <a href="https://esamultimedia.esa.int/docs/EarthObservation/CO2M_MRD_v2.0_Issued20190927.pdf">https://esamultimedia.esa.int/docs/EarthObservation/CO2M_MRD_v2.0_Issued20190927.pdf</a></li> <li>ESA Climate Change Initiative (CCI) User Requirements Document Version 2.1 (URDv2.1) for the Essential Climate Variable (ECV) Greenhouse Gases (GHG) <a href="http://www.esa-ghg-cci.org/?q=node/85">http://www.esa-ghg-cci.org/?q=node/85</a></li> <li>CEOS documents: <a href="http://ceos.org/ourwork/virtual-constellations/acc/">http://ceos.org/ourwork/virtual-constellations/acc/</a></li> <li>CEOS GHG report/white paper: <a href="http://ceos.org/document_management/Virtual_Constellations/ACC/Documents/CEOS_AC-VC_GHG_White_Paper_Publication_Draft2_20181111.pdf">http://ceos.org/document_management/Virtual_Constellations/ACC/Documents/CEOS_AC-VC_GHG_White_Paper_Publication_Draft2_20181111.pdf</a></li> <li>GAW Report, 242. 19th WMO/IAEA Meeting on Carbon Dioxide, Other Greenhouse Gases and Related Measurement Techniques (GGMT-2017) Crotwell Andrew; Steinbacher M.; World Meteorological Organization (WMO) - WMO, 2018 <a href="https://library.wmo.int/doc_num.php?explnum_id=5456">https://library.wmo.int/doc_num.php?explnum_id=5456</a></li> </ul>				

### 3.1.4 ECV Product: CH<sub>4</sub> mole fraction

Name	CH <sub>4</sub> mole fraction				
Definition	3D field of amount of CH <sub>4</sub> (Methane, expressed in moles) divided by the total amount of all constituents in dry air (also expressed in moles)				
Unit	ppb				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	100	
			B	500	
			T	2000	
Vertical Resolution	km		G	0.1	
			B	1	
			T	3	
Temporal Resolution	hr		G	1	
			B	24	well-mixed
			T	168	well-mixed
Timeliness	day		G	1	
			B	30	
			T	180	
Required Measurement Uncertainty (2-sigma)	ppb		G	1	Expert judgement based on GAW Rep. No. 242 network compatibility
			B	2	Expert judgement based on GAW Rep. No. 242 extended network compatibility
			T	5	Expert judgment, larger than B.
Stability	ppb/decade		G	1	Within accuracy
			B	1	Within accuracy/2
			T	3	Within accuracy/2
Standards and References	<p>Green Report, 2019: Needs and High Level Requirements for in situ Measurements  <a href="https://www.copernicus.eu/sites/default/files/2019-09/CO2_Green_Report_2019.pdf">https://www.copernicus.eu/sites/default/files/2019-09/CO2_Green_Report_2019.pdf</a></p> <p>GAW Report, 242. 19th WMO/IAEA Meeting on Carbon Dioxide, Other Greenhouse Gases and Related Measurement Techniques (GGMT-2017) Crotwell Andrew; Steinbacher M.; World Meteorological Organization (WMO) - WMO, 2018  <a href="https://library.wmo.int/doc_num.php?explnum_id=5456">https://library.wmo.int/doc_num.php?explnum_id=5456</a></p>				

### 3.1.5 ECV Product: CH<sub>4</sub> column average dry air mixing ratio

Name	CH <sub>4</sub> column average dry air mixing ratio				
Definition	2D column integrated number of molecules of the target gas (CH <sub>4</sub> ) divided by that of dry air expressed in mole fraction				
Unit	nmol/mol				
Note	Temporal resolution and timeliness are kept the same/compatible with CO <sub>2</sub>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	0.3	Imaging, permafrost region
			B	1	Improved TROPOMI
			T	10	TROPOMI/S5P
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hr		G	1	Geo constellation + LEO
			B	12	In the middle between threshold and goal
			T	72	TROPOMI revisit, single geostationary
Timeliness	day		G	1	
			B	7	
			T	14	
Required Measurement Uncertainty (2-sigma)	ppb		G	7	1-sigma: 3.5ppb GeoCARB and MERLIN mission requirements, 0.2% of current CH <sub>4</sub> burden
			B	10	1-sigma: 5ppb Expert judgement based on expected improvement of TROPOMI/S5P
			T	20	1-sigma: 10ppb TROPOMI/S5P, CEOS doc, advancing from GCOS 2011
Stability	ppb/decade		G	1	Within accuracy / 5
			B	2	within accuracy / 5
			T	4	within accuracy / 5
Standards and References	<p>Blue Report, 2015: Towards a European Operational Observing System to Monitor Fossil CO<sub>2</sub> emissions  <a href="https://www.copernicus.eu/sites/default/files/2019-09/CO2_Blue_report_2015.pdf">https://www.copernicus.eu/sites/default/files/2019-09/CO2_Blue_report_2015.pdf</a></p> <p>Red Report, 2017: Baseline Requirements, Model Components and Functional Architecture  <a href="https://www.copernicus.eu/sites/default/files/2019-09/CO2_Red_Report_2017.pdf">https://www.copernicus.eu/sites/default/files/2019-09/CO2_Red_Report_2017.pdf</a></p> <p>Green Report, 2019: Needs and High Level Requirements for in situ Measurements  <a href="https://www.copernicus.eu/sites/default/files/2019-09/CO2_Green_Report_2019.pdf">https://www.copernicus.eu/sites/default/files/2019-09/CO2_Green_Report_2019.pdf</a></p> <p>CO<sub>2</sub>M  <a href="https://www.esa.int/Applications/Observing_the_Earth/Copernicus/Copernicus_High_Priority_Candidates">https://www.esa.int/Applications/Observing_the_Earth/Copernicus/Copernicus_High_Priority_Candidates</a></p> <p>MRD, v 2.0:  <a href="https://esamultimedia.esa.int/docs/EarthObservation/CO2M_MRD_v2.0_Issued20190927.pdf">https://esamultimedia.esa.int/docs/EarthObservation/CO2M_MRD_v2.0_Issued20190927.pdf</a></p> <p>ESA Climate Change Initiative (CCI) User Requirements Document Version 2.1 (URDv2.1) for the Essential Climate Variable (ECV) Greenhouse Gases (GHG)  <a href="http://www.esa-ghg-cci.org/?q=node/85">http://www.esa-ghg-cci.org/?q=node/85</a></p> <p>CEOS documents:  <a href="http://ceos.org/ourwork/virtual-constellations/acc/">http://ceos.org/ourwork/virtual-constellations/acc/</a></p> <p>CEOS GHG report/white paper:  <a href="http://ceos.org/document_management/Virtual_Constellations/ACC/Documents/CEOS_AC-VC_GHG_White_Paper_Publication_Draft2_20181111.pdf">http://ceos.org/document_management/Virtual_Constellations/ACC/Documents/CEOS_AC-VC_GHG_White_Paper_Publication_Draft2_20181111.pdf</a></p> <p>GAW Report, 242. 19th WMO/IAEA Meeting on Carbon Dioxide, Other Greenhouse Gases and Related Measurement Techniques (GGMT-2017) Crotwell Andrew; Steinbacher M.; World Meteorological Organization (WMO) - WMO, 2018  <a href="https://library.wmo.int/doc_num.php?explnum_id=5456">https://library.wmo.int/doc_num.php?explnum_id=5456</a></p>				

### 3.2 ECV: Ozone

#### 3.2.1 ECV Product: Ozone mole fraction in the Troposphere

<b>Name</b>	<b>Troposphere Ozone mole fraction in the troposphere</b>				
<b>Definition</b>	3D field of amount of O3 (expressed in moles) in the troposphere divided by the total amount of all constituents in dry air (also expressed in moles)				
<b>Unit</b>	% (directly transferrable to mixing ratios, mol/mol)				
<b>Note</b>	<p>The team of ozone experts unanimously agreed that the uncertainty and stability requirements for each of these ozone data products should be expressed as % and %/decade in the tables. Defining requirements in units of mixing ratios or Dobson Units would require each uncertainty and stability requirement be a wide range of values. We therefore found it more definitive and intuitive that each table entry is one number in % or %/decade.</p> <p>To help translate the requirements in % or %/decade to absolute units we have put a footnote beneath each table that quantitatively describes the wide range of mixing ratios or Dobson Units corresponding to that data product. This helps to explain why the requirements in the tables are not expressed in units of mixing ratio or DU. Requirements in absolute units are easily calculated by multiplying the % (or %/decade) in the table by the mixing ratio or DU ranges in the footnotes.</p>				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	1	1, 2, 3, 4,5,6,7
			B	20	
			T	100	
<b>Vertical Resolution</b>	km		G	1	1,2,3,4,5,6,7
			B	3	
			T	5	
<b>Temporal Resolution</b>	days		G	1/24	1, 2, 3, 4,5,6,7
			B	1/4	
			T	30	
<b>Timeliness</b>	days		G	1/24	
			B	1	
			T	30	
<b>Required Measurement Uncertainty (2-sigma)</b>	%		G	2	1, 2, 3, 4,5,6,7,8 Requirements for uncertainty (%) and stability (%/decade) translate to wide mixing ratio requirement ranges based on a 20 to 80 ppb range of ozone mixing ratios in the troposphere.
			B	5	
			T	10	
<b>Stability</b>	%/decade		G	<1	1, 2, 3, 4,5,6,7,8 Requirements for uncertainty (%) and stability (%/decade) translate to wide mixing ratio requirement ranges based on a 20 to 80 ppb range of ozone mixing ratios in the troposphere.
			B	2	
			T	3	
<b>Standards and References</b>	<ol style="list-style-type: none"> <li>Ozone Climate Change Initiative User Requirements Document <a href="http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf">http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf</a></li> <li>WMO (World Meteorological Organization), Stratospheric Ozone Changes and Climate in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf</a></li> <li>Climate Monitoring User Group CCI Requirements Baseline Documents <a href="http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf">http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf</a></li> <li>WMO (World Meteorological Organization), Update on Global Ozone: Past, Present and Future in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf</a></li> <li>Gaudel, A., et al. (2018), Tropospheric Ozone Assessment Report: Present-day distribution and trends of tropospheric ozone relevant to climate and global atmospheric chemistry model evaluation, Elem. Sci. Anth., 6(1), 39, <a href="https://doi.org/10.1525/elementa.291">https://doi.org/10.1525/elementa.291</a></li> <li>Tarasick, D. W., I. E. Galbally, O. R. Cooper, M. G. Schultz, G. Ancellet, T. Leblanc, T. J. Wallington, J. Ziemke, X. Liu, M. Steinbacher, J. Staehelin, C. Vigouroux, J. W. Hannigan, O. Garcia, G. Foret, P. Zanis, E. Weatherhead, I. Petropavlovskikh, H. Worden, M. Osman, J. Liu, K.-L. Chang, A. Gaudel, M. Lin, M. Granados-Muñoz, A. M. Thompson, S. J. Oltmans, J. Cuesta, G. Dufour, V. Thouret, B. Hassler, T. Trickl and J. L. Neu (2019), Tropospheric Ozone Assessment Report: Tropospheric ozone from 1877 to 2016, observed levels, trends and uncertainties. Elem Sci Anth, 7(1), DOI: <a href="http://doi.org/10.1525/elementa.376">http://doi.org/10.1525/elementa.376</a></li> </ol>				

7. Galbally, IE, Schultz, MG, Buchmann, B, Gilge, S, Guenther, F, Koide, H, Oltmans, S, Patrick, L, Scheel, H-E, Smit, H, Steinbacher, M, Steinbrecht, W, Tarasova, O, Viallon, J, Volz-Thomas, A, Weber, M, Wielgosz, R and Zellweger, C. (2013), Guidelines for Continuous Measurement of Ozone in the Troposphere, GAW Report No 209, Publication WMO-No. 1110, ISBN 978-92-63-11110-4, Geneva, Switzerland: World Meteorological Organisation, 76. <http://www.wmo.int/pages/prog/arep/gaw/gaw-reports.html>
8. Fischer, E.V., Jaffe, D.A. and Weatherhead, E.C., 2011. Free tropospheric peroxyacetyl nitrate (PAN) and ozone at Mount Bachelor: causes of variability and timescale for trend detection. Atmospheric Chemistry & Physics Discussions, 11(2).

### 3.2.2 ECV Product: : Ozone mole fraction in the Upper Troposphere/ Lower Stratosphere (UTLS)

<b>Name</b>	<b>Ozone mole fraction in the Upper Troposphere/ Lower Stratosphere (UTLS)</b>				
<b>Definition</b>	3D field of amount of O3 (expressed in moles) in the upper troposphere/lower stratosphere (UTLS) divided by the total amount of all constituents in dry air (also expressed in moles)				
<b>Unit</b>	% (directly transferrable to mixing ratios, mol/mol)				
<b>Note</b>	<p>The team of ozone experts unanimously agreed that the uncertainty and stability requirements for each of these ozone data products should be expressed as % and %/decade in the tables. Defining requirements in units of mixing ratios or Dobson Units would require each uncertainty and stability requirement be a wide range of values. We therefore found it more definitive and intuitive that each table entry is one number in % or %/decade.</p> <p>To help translate the requirements in % or %/decade to absolute units we have put a footnote beneath each table that quantitatively describes the wide range of mixing ratios or Dobson Units corresponding to that data product. This helps to explain why the requirements in the tables are not expressed in units of mixing ratio or DU. Requirements in absolute units are easily calculated by multiplying the % (or %/decade) in the table by the mixing ratio or DU ranges in the footnotes.</p>				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	10	1, 2, 3, 4,5
			B	50	
			T	200	
<b>Vertical Resolution</b>	km		G	0.5	1,2,3,4,5
			B	1	
			T	3	
<b>Temporal Resolution</b>	days		G	1/4	1, 2, 3, 4,5
			B	1	
			T	30	
<b>Timeliness</b>	days		G	1/4	
			B	1	
			T	30	
<b>Required Measurement Uncertainty (2-sigma)</b>	%		G	2	1, 2, 3, 4,5 Requirements for uncertainty (%) and stability (%/decade) translate o wide mixing ratio requirement ranges based on a 50 ppb to 3 ppm range of ozone mixing ratios in the UTLS.
			B	5	
			T	10	
<b>Stability</b>	%/decade		G	1	1, 2, 3, 4,5 Requirements for uncertainty (%) and stability (%/decade) translate to wide mixing ratio requirement ranges based on a 50 ppb to 3 ppm range of ozone mixing ratios in the UTLS.
			B	2	
			T	3	
<b>Standards and References</b>	<ol style="list-style-type: none"> <li>Ozone Climate Change Initiative User Requirements Document <a href="http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf">http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf</a></li> <li>WMO (World Meteorological Organization), Stratospheric Ozone Changes and Climate in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf</a></li> <li>Climate Monitoring User Group CCI Requirements Baseline Documents <a href="http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf">http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf</a></li> <li>WMO (World Meteorological Organization), Update on Global Ozone: Past, Present and Future in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf</a></li> <li>Gaudel, A., et al. (2018), Tropospheric Ozone Assessment Report: Present-day distribution and trends of tropospheric ozone relevant to climate and global atmospheric chemistry model evaluation, Elem. Sci. Anth., 6(1), 39, <a href="https://doi.org/10.1525/elementa.291">https://doi.org/10.1525/elementa.291</a></li> </ol>				



### 3.2.3 ECV Product: Ozone mole fraction in the Middle and Upper Stratosphere

Ozone mole fraction in the Middle and Upper Stratosphere					
<b>Name</b>	Ozone mole fraction in the Middle and Upper Stratosphere				
<b>Definition</b>	3D field of amount of O3 (expressed in moles) in the Middle and Upper Stratosphere divided by the total amount of all constituents in dry air (also expressed in moles)				
<b>Unit</b>	% (directly transferrable to mixing ratios, mol/mol)				
<b>Note</b>	<p>The team of ozone experts unanimously agreed that the uncertainty and stability requirements for each of these ozone data products should be expressed as % and %/decade in the tables. Defining requirements in units of mixing ratios or Dobson Units would require each uncertainty and stability requirement be a wide range of values. We therefore found it more definitive and intuitive that each table entry is one number in % or %/decade.</p> <p>To help translate the requirements in % or %/decade to absolute units we have put a footnote beneath each table that quantitatively describes the wide range of mixing ratios or Dobson Units corresponding to that data product. This helps to explain why the requirements in the tables are not expressed in units of mixing ratio or DU. Requirements in absolute units are easily calculated by multiplying the % (or %/decade) in the table by the mixing ratio or DU ranges in the footnotes.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	20	1, 2, 3, 4,
			B	100	
			T	500	
Vertical Resolution	km		G	1	1,2,3,4,
			B	3	
			T	10	
Temporal Resolution	days		G	1/4	1, 2, 3, 4,
			B	1	
			T	30	
Timeliness	days		G	1/4	
			B	1	
			T	30	
Required Measurement Uncertainty (2-sigma)	%		G	5	1, 2, 3, 4, Requirements for uncertainty (%) and stability (%/decade) translate to wide mixing ratio requirement ranges based on a 3 to 10 ppm range of ozone mixing ratios in the middle and upper stratosphere.
			B	10	
			T	15	
Stability	%/decade		G	1	1, 2, 3, 4, Requirements for uncertainty (%) and stability (%/decade) translate to wide mixing ratio requirement ranges based on a 3 to 10 ppm range of ozone mixing ratios in the middle and upper stratosphere.
			B	2	
			T	3	
<b>Standards and References</b>	<p>1. Ozone Climate Change Initiative User Requirements Document  <a href="http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf">http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf</a></p> <p>2. WMO (World Meteorological Organization), Stratospheric Ozone Changes and Climate in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018.  <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf</a></p> <p>3. Climate Monitoring User Group CCI Requirements Baseline Documents  <a href="http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf">http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf</a></p> <p>4. WMO (World Meteorological Organization), Update on Global Ozone: Past, Present and Future in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf</a></p>				

### 3.2.4 ECV Product: Ozone Tropospheric Column

Name	Ozone Tropospheric Column				
Definition	2D field of total amount of O <sub>3</sub> molecules per unit area in an atmospheric column extending from the Earth's surface to the tropopause				
Unit	% (directly transferrable to Dobson units)				
Note	<p>The team of ozone experts unanimously agreed that the uncertainty and stability requirements for each of these ozone data products should be expressed as % and %/decade in the tables. Defining requirements in units of mixing ratios or Dobson Units would require each uncertainty and stability requirement be a wide range of values. We therefore found it more definitive and intuitive that each table entry is one number in % or %/decade.</p> <p>To help translate the requirements in % or %/decade to absolute units we have put a footnote beneath each table that quantitatively describes the wide range of mixing ratios or Dobson Units corresponding to that data product. This helps to explain why the requirements in the tables are not expressed in units of mixing ratio or DU. Requirements in absolute units are easily calculated by multiplying the % (or %/decade) in the table by the mixing ratio or DU ranges in the footnotes.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	5	1, 2, 3, 4,5
			B	20	
			T	100	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	
			T	N/A	
Temporal Resolution	days		G	1/24	1, 2, 3, 4,5
			B	1/4	
			T	30	
Timeliness	days		G	1/24	
			B	1	
			T	30	
Required Measurement Uncertainty (2-sigma)	%		G	5	1, 2, 3, 4,5 Requirements for uncertainty (%) and stability (%/decade) translate to wide Dobson Unit requirement ranges based on a 20 to 45 DU range of ozone tropospheric columns.
			B	10	
			T	15	
Stability	%/decade		G	1	1, 2, 3, 4,5 Requirements for uncertainty (%) and stability (%/decade) translate to wide Dobson Unit requirement ranges based on a 20 to 45 DU range of ozone tropospheric columns.
			B	2	
			T	3	
Standards and References	<ol style="list-style-type: none"> <li>Ozone Climate Change Initiative User Requirements Document <a href="http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf">http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf</a></li> <li>WMO (World Meteorological Organization), Stratospheric Ozone Changes and Climate in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf</a></li> <li>Climate Monitoring User Group CCI Requirements Baseline Documents <a href="http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf">http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf</a></li> <li>WMO (World Meteorological Organization), Update on Global Ozone: Past, Present and Future in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf</a></li> <li>Gaudel, A., et al. (2018), Tropospheric Ozone Assessment Report: Present-day distribution and trends of tropospheric ozone relevant to climate and global atmospheric chemistry model evaluation, Elem. Sci. Anth., 6(1), 39, <a href="https://doi.org/10.1525/elementa.291">https://doi.org/10.1525/elementa.291</a></li> </ol>				

### 3.2.5 ECV Product: Ozone Stratospheric Column

<b>Name</b>	<b>Ozone Stratospheric Column</b>				
<b>Definition</b>	2D field of total amount of O3 molecules per unit area in an atmospheric column extending from tropopause to stratopause				
<b>Unit</b>	% (directly transferrable to Dobson units)				
<b>Note</b>	<p>The team of ozone experts unanimously agreed that the uncertainty and stability requirements for each of these ozone data products should be expressed as % and %/decade in the tables. Defining requirements in units of mixing ratios or Dobson Units would require each uncertainty and stability requirement be a wide range of values. We therefore found it more definitive and intuitive that each table entry is one number in % or %/decade.</p> <p>To help translate the requirements in % or %/decade to absolute units we have put a footnote beneath each table that quantitatively describes the wide range of mixing ratios or Dobson Units corresponding to that data product. This helps to explain why the requirements in the tables are not expressed in units of mixing ratio or DU. Requirements in absolute units are easily calculated by multiplying the % (or %/decade) in the table by the mixing ratio or DU ranges in the footnotes.</p> <p>This data product must consider additional uncertainties introduced by errors in tropopause heights and must definitively state which tropopause definition was used.</p>				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	20	1, 2, 3, 4
			B	100	
			T	500	
<b>Vertical Resolution</b>	N/A		G	N/A	N/A
			B	N/A	
			T	N/A	
<b>Temporal Resolution</b>	days		G	1/24	1, 2, 3, 4
			B	1	
			T	30	
<b>Timeliness</b>	days		G	1/4	
			B	1	
			T	30	
<b>Required Measurement Uncertainty (2-sigma)</b>	%		G	1	1, 2, 3, 4 Requirements for uncertainty (%) and stability (%/decade) translate to wide Dobson Unit requirement ranges based on a 150 to 450 DU range of ozone stratospheric columns.
			B	3	
			T	5	
<b>Stability</b>	%/decade		G	1	1, 2, 3, 4 Requirements for uncertainty (%) and stability (%/decade) translate to wide Dobson Unit requirement ranges based on a 150 to 450 DU range of ozone stratospheric columns.
			B	2	
			T	3	
<b>Standards and References</b>	<ol style="list-style-type: none"> <li>Ozone Climate Change Initiative User Requirements Document <a href="http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf">http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf</a></li> <li>WMO (World Meteorological Organization), Stratospheric Ozone Changes and Climate in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf</a></li> <li>Climate Monitoring User Group CCI Requirements Baseline Documents <a href="http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf">http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf</a></li> <li>WMO (World Meteorological Organization), Update on Global Ozone: Past, Present and Future in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf</a></li> </ol>				

### 3.2.6 ECV Product: Ozone Total Column

Name		Ozone Total Column			
Definition	2D field of total amount of O <sub>3</sub> molecules per unit area in an atmospheric column extending from the Earth's surface to the upper edge of the atmosphere				
Unit	% (directly transferrable to Dobson units)				
Note	<p>The team of ozone experts unanimously agreed that the uncertainty and stability requirements for each of these ozone data products should be expressed as % and %/decade in the tables. Defining requirements in units of mixing ratios or Dobson Units would require each uncertainty and stability requirement be a wide range of values. We therefore found it more definitive and intuitive that each table entry is one number in % or %/decade.</p> <p>To help translate the requirements in % or %/decade to absolute units we have put a footnote beneath each table that quantitatively describes the wide range of mixing ratios or Dobson Units corresponding to that data product. This helps to explain why the requirements in the tables are not expressed in units of mixing ratio or DU. Requirements in absolute units are easily calculated by multiplying the % (or %/decade) in the table by the mixing ratio or DU ranges in the footnotes.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	20	1, 2, 3, 4
			B	100	
			T	500	
Vertical Resolution	N/A		G	N/A	N/A
			B	N/A	
			T	N/A	
Temporal Resolution	days		G	1/24	1, 2, 3, 4
			B	1	
			T	30	
Timeliness	days		G	1/24	
			B	1	
			T	30	
Required Measurement Uncertainty (2-sigma)	%		G	1	1, 2, 3, 4 Requirements for uncertainty (%) and stability (%/decade) translate to wide Dobson Unit requirement ranges based on a 200 to 500 DU range of ozone total columns.
			B	2	
			T	3	
Stability	%/decade		G	1	1, 2, 3, 4 Requirements for uncertainty (%) and stability (%/decade) translate to wide Dobson Unit requirement ranges based on a 200 to 500 DU range of ozone total columns.
			B	2	
			T	3	
Standards and References	<ol style="list-style-type: none"> <li>Ozone Climate Change Initiative User Requirements Document <a href="http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf">http://cci.esa.int/sites/default/files/filedepot/incoming/Ozone_cci_urd_v3.0_final.pdf</a></li> <li>WMO (World Meteorological Organization), Stratospheric Ozone Changes and Climate in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter5_2018OzoneAssessment.pdf</a></li> <li>Climate Monitoring User Group CCI Requirements Baseline Documents <a href="http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf">http://ensembles-eu.metoffice.com/cmug/CMUG_PHASE_2_D1.1_Requirements_v0.6.pdf</a></li> <li>WMO (World Meteorological Organization), Update on Global Ozone: Past, Present and Future in Scientific Assessment of Ozone Depletion: 2018, Global Ozone Research and Monitoring Project–Report No. 58, 588 pp., Geneva, Switzerland, 2018. <a href="https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf">https://www.esrl.noaa.gov/csd/assessments/ozone/2018/downloads/Chapter3_2018OzoneAssessment.pdf</a></li> </ol>				

### 3.3 ECV: Precursors (Supporting the aerosol and ozone ECVs)

#### 3.3.1 ECV Product: CO Tropospheric Column

Name	CO Tropospheric Column				
Definition	2D field of total amount of CO molecules per unit area in an atmospheric column extending from the Earth's surface to the tropopause				
Unit	ppb				
Note	Total column CO can approximate tropospheric CO. Observations exist for total column CO.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	In line with O3 & AOD & precursors
			B	30	
			T	100	
Vertical Resolution	N/A		G		Column Integrated
			B		
			T		
Temporal Resolution	day		G	1/24	In line with O3 & AOD & precursors
			B	1	
			T	30	
Timeliness	day		G	1	
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	ppb		G	1	Relaxed from GAW #242
			B	5	
			T	10	
Stability	ppb/decade		G	<1	accuracy/5
			B	1	
			T	2	
Standards and References	GAW Report 242: GAW Report, 242. 19th WMO/IAEA Meeting on Carbon Dioxide, Other Greenhouse Gases and Related Measurement Techniques (GGMT-2017) Landgraf et al, 2016, AMT; <a href="https://doi.org/10.5194/amt-9-4955-2016">https://doi.org/10.5194/amt-9-4955-2016</a>				

### 3.3.2 ECV Product: CO Mole fraction

Name	CO Mole fraction				
Definition	3D field of amount of CO (Carbon monoxide, expressed in moles) divided by the total amount of all constituents in dry air (also expressed in moles)				
Unit	Mole fraction				
Note	Tropospheric				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	close to the ozone requirements
			B	30	
			T	100	
Vertical Resolution	m		G	1	in line with ozone requirements
			B	3	
			T	5	
Temporal Resolution	day		G	1/24	in line with ozone requirements
			B	1	
			T	30	
Timeliness	day		G	1	
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	ppb		G	1	
			B	5	
			T	10	
Stability	ppb/decade		G	<1	
			B	1	
			T	3	
Standards and References	GAW Report, 242. 19th WMO/IAEA Meeting on Carbon Dioxide, Other Greenhouse Gases and Related Measurement Techniques (GGMT-2017)				

### 3.3.3 ECV Product: HCHO Tropospheric Column

Name	HCHO Tropospheric Column				
Definition	2D field of total amount of HCHO molecules per unit area in an atmospheric column extending from the Earth's surface to the tropopause				
Unit	Molecules/cm <sup>2</sup>				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	10	
			B	30	
			T	100	
Vertical Resolution	N/A		G		Column Integrated
			B		
			T		
Temporal Resolution	day		G	1/24	in line with O3 & aerosols.
			B	1	
			T	30	
Timeliness	day		G	1	
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	Molecules/cm <sup>2</sup>		G	Max (20%, 8E15)	Pre-launch accuracy requirements for TROPOMI were 40-80 %; Vigoroux et al., 2020; <a href="https://doi.org/10.5194/amt-13-3751-2020">https://doi.org/10.5194/amt-13-3751-2020</a> Achievable with satellites, noting that accuracy is typically dominated by fit error, can be largely improved by temporal and spatial averaging
			B	max (40%, 16E15)	
			T	max (100%, 40E15)	
Stability			G	max(4%, 8E15)	
			B	max (8%, 8E15)	
			T	max (20%, 8E15)	
Standards and References	Uncertainties in Hydrocarbon emission inventories (Cao et al, 2018, Kaiser et al 2018). Typical variability over continental regions, Zhu et al., 2016. Variability of the remote atmosphere, Wolfe et al 2019.				

### 3.3.4 ECV Product: SO<sub>2</sub> Tropospheric Column

Name	SO <sub>2</sub> TroposphericColumn				
Definition	2D field of total amount of SO <sub>2</sub> molecules per unit area in an atmospheric column extending from the Earth's surface to the tropopause				
Unit	Molecules/cm <sup>2</sup>				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	10	in line with O3 & AOD & precursors
			B	30	
			T	100	
Vertical Resolution	N/A		G		Column Integrated
			B		
			T		
Temporal Resolution	day		G	1/24	in line with O3 & AOD & precursors
			B	1	
			T	30	
Timeliness	day		G	1	
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	Molecules/cm <sup>2</sup>		G	max(30%, 6E15)	Improved from Breakthrough
			B	max(60%, 12E15)	Driven by relaxed NO <sub>2</sub> accuracy (1.5* NO <sub>2</sub> accuracy in %)
			T	max(100%, 20E15)	Relaxed from Breakthrough, closer to achievable
Stability	Molecules/cm <sup>2</sup> /decade		G	max(6%, 1.2E15)	Accuracy/5
			B	max(12%, 2.4E15)	
			T	max(20%, 4E15)	
Standards and References	Accuracy is typically dominated by fit error, can be largely improved by temporal and spatial averaging, AMF for tropospheric SO <sub>2</sub> is smaller than for HCHO and NO <sub>2</sub>				



### 3.3.5 ECV product: SO<sub>2</sub> stratospheric column

Name	SO <sub>2</sub> stratospheric column				
Definition	2D field of total amount of SO <sub>2</sub> molecules per unit area in an atmospheric column extending from the tropopause to the top of the atmosphere				
Unit	Molecules/cm <sup>2</sup>				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	10	in line with O3 & AOD & precursors
			B	30	
			T	100	
Vertical Resolution	N/A		G		Column Integrated
			B		
			T		
Temporal Resolution	day		G	1/24	in line with O3 & AOD & precursors
			B	1	
			T	30	
Timeliness	day		G	1	
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	Molecules/cm <sup>2</sup>		G	max(30%, 6E15)	According to tropospheric SO <sub>2</sub> reqs
			B	max(60%, 12E15)	
			T	max(100%, 20E15)	
Stability	Molecules/cm <sup>2</sup> /decade		G	max(10%, 3E15)	Accuracy/3
			B	max(20%, 4E15)	
			T	max(30%, 7E15)	
Standards and References	Accuracy is typically dominated by fit error, can be largely improved by temporal and spatial averaging, AMF for tropospheric SO <sub>2</sub> is smaller than for HCHO and NO <sub>2</sub>				

### 3.3.6 ECV Product: NO<sub>2</sub> Tropospheric Column

Name	NO <sub>2</sub> Tropospheric Column				
Definition	2D field of total amount of NO <sub>2</sub> molecules per unit area in an atmospheric column extending from the Earth's surface to the tropopause				
Unit	Molecules/cm <sup>2</sup> -				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	10	in line with O3 & AOD & precursors
			B	30	
			T	100	
Vertical Resolution	N/A		G		Column Integrated
			B		
			T		
Temporal Resolution	day		G	1/24	in line with O3 & AOD & precursors
			B	1	
			T	30	
Timeliness	day		G	1	
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	Molecules/cm <sup>2</sup>		G	max(20%, 1E15)	Improved accuracy
			B	max(40%, 2E15)	Requirement according to 2016 IP
			T	max(100%, 5E15)	Achievable accuracy.
Stability	Molecules/cm <sup>2</sup> /decade		G	max(4%, 1E15)	accuracy/5
			B	max(8%, 1E15)	
			T	max(20%, 1E15)	
Standards and References					

### 3.3.7 ECV Product: NO<sub>2</sub> mole fraction

NO <sub>2</sub> mole fraction					
<b>Name</b>	3D field of amount of NO <sub>2</sub> (expressed in moles) divided by the total amount of all constituents in dry air (also expressed in moles) – in stratosphere				
<b>Unit</b>	ppb				
<b>Note</b>					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation and References and Standards
Horizontal Resolution	km		G	20	in line with ozone profile
			B	100	
			T	500	
Vertical Resolution	km		G	1	in line with ozone profile
			B	3	in line with ozone profile
			T	5	Relaxed from breakthrough
Temporal Resolution	day		G	1/4	
			B	1	
			T	30	
Timeliness	day		G	1	in line with ozone profile
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	%		G	20	Achievable with solar occultation
			B	40	Limb scatter, stellar occultation, joint random & systematic uncertainty (1-sigma) around 20%
			T	60	Relaxed compared to limb scatter
Stability	%/decade		G	4	accuracy/5
			B	8	
			T	12	
<b>Standards and References</b>	<a href="https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1029/91JD01344">https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1029/91JD01344</a> <a href="https://acp.copernicus.org/articles/8/5801/2008/acp-8-5801-2008.pdf">https://acp.copernicus.org/articles/8/5801/2008/acp-8-5801-2008.pdf</a> Brochede et al, 2007; geophys comparison, <a href="https://doi.org/10.1029/2006JD007586">https://doi.org/10.1029/2006JD007586</a> Tamminen et. Al 2010. doi:10.5194/acp-10-9505-2010 <a href="https://acp.copernicus.org/articles/7/3261/2007/">https://acp.copernicus.org/articles/7/3261/2007/</a> Fussen et al, 2019, <a href="https://doi.org/10.1016/j.jqsrt.2019.06.021">https://doi.org/10.1016/j.jqsrt.2019.06.021</a>				

### 3.4 ECV: Aerosols Properties

#### 3.4.1 ECV Product: Aerosol light extinction vertical profile (Troposphere)

Name	Aerosol light extinction vertical profile (troposphere)				
Definition	Spectrally dependent sum of aerosol particle light scattering and absorption coefficients per unit of geometrical path length.				
Unit	Km <sup>-1</sup>				
Note	As proxy where extinction profiles are not available a very useful information is the Aerosol Layer Height layer derived from lidar or thermal instruments				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km	Extinction profiles are retrieved by lidar observations so they typically refer to punctual observations. The reported value in terms of horizontal resolution are here mutated from the AOD .	G	50	
			B	100	
			T	500	
Vertical Resolution	km	Effective vertical resolution depends on the aerosol load strongly. The reported values refer to aerosol extinction @532 nm larger than 2.5 10 <sup>-2</sup> km <sup>-1</sup>	G	0.2	
			B	1	
			T	2	
Temporal Resolution	day	All the indicated averaging times are assumed to be representative	G	1	
			B	30	
			T	90	
Timeliness	Year		G	0,003	
			B	0.08	
			T	1	
Required Measurement Uncertainty (2-sigma)	%	Uncertainty is dependent on the atmospheric aerosol load. These relative uncertainties refer to extinction values @532nm larger than 2.5 10 <sup>-2</sup> km <sup>-1</sup>	G	20	The reference value above (2.5 10 <sup>-2</sup> km <sup>-1</sup> ), to which the uncertainty and stability and vertical resolution requirements apply, are related to the presence of aerosol. The value of 2.5 10 <sup>-2</sup> km <sup>-1</sup> @532nm has been estimated within ACTRIS/EARLINET as indicative of the presence of an aerosol layer (ref : QC documentation available at <a href="http://www.earlinet.org">www.earlinet.org</a> )
			B	40	
			T	60	
Stability	% /decade	These percentages refer to extinction values @532nm larger than 2.5 10 <sup>-2</sup> km <sup>-1</sup> .	G	10	Stability for users' requirements for this quantity are estimated from the corresponding AOD: for AOD the required stability is one half of the required uncertainty. This criterion has been adopted also for the aerosol extinction (which is the profiling analogue of AOD).
			B	20	
			T	30	
Standards and References	Samset, B. H., and G. Myhre, Climate response to externally mixed black carbon as a function of altitude, J. Geophys. Res. Atmos., 120, 2913–2927, doi:10.1002/2014JD022849, 2015. Pappalardo, G., Amodeo, A., Apituley, A., Comeron, A., Freudenthaler, V., Linné, H., Ansmann, A., Bösenberg, J., D'Amico, G., Mattis, I., Mona, L., Wandinger, U., Amiridis, V., Alados-Arboledas, L.,				

Nicolae, D., and Wiegner, M.: EARLINET: towards an advanced sustainable European aerosol lidar network, *Atmos. Meas. Tech.*, 7, 2389–2409, <https://doi.org/10.5194/amt-7-2389-2014>, 2014.

Welton, E.J., J. R. Campbell, J. D. Spinhirne, and V. S. Scott. Global monitoring of clouds and aerosols using a network of micro-pulse lidar systems, *Proc. SPIE*, 4153, 151-158, 2001.

Welton, E.J. K.J. Voss, H.R. Gordon, H. Maring, A. Smirnov, B. Holben, B. Schmid, J.M. Livingston, P.B. Russell, P.A. Durkee, P. Formenti, M.O. Andreae. Ground-based Lidar Measurements of Aerosols During ACE-2: Instrument Description, Results, and Comparisons with other Ground-based and Airborne Measurements, *Tellus B*, 52, 635-650, 2000.

Anderson, T. L., R. J. Charlson, D. M. Winker, J. A. Ogren, and K. Holmén, Mesoscale variations of tropospheric aerosols, *J. Atmos. Sci.*, 60, 119– 136, 2003.

Shimizu, A., T. Nishizawa, Y. Jin, S.-W. Kim, Z. Wang, D. Batdorj and N. Sugimoto, Evolution of a lidar network for tropospheric aerosol detection in East Asia, *Optical Engineering*. 56 (3), 031219, 2016.

### 3.4.2 ECV Product: Aerosol light extinction vertical profile (stratosphere)

Name	Aerosol light extinction vertical profile in the stratosphere				
Definition	Spectrally dependent sum of aerosol particle light scattering and absorption coefficients per unit of geometrical path length.				
Unit	Km <sup>-1</sup>				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km	Extinction profiles are retrieved by lidar observations so they typically refer to punctual observations. But they are also inverted from limb and occultation soundings from satellite for which the spatial resolution can be used when aggregating individual measurements	G	200	In the stratosphere aerosols are fast spread in latitude bands. Therefore, higher resolution is required along meridians than within latitude bands Source: Aerosol_cci2 User Requirements Document v3.0, 2017
			B	500 (latitude) x 6000 (longitude)	
			T		
Vertical Resolution	km	Effective vertical resolution depends on the aerosol load strongly. The reported values refer to aerosol extinction @532 nm larger than 2.5 10 <sup>-2</sup> km <sup>-1</sup>	G	1	Finer vertical resolution is required near the tropopause so that small to medium sized volcanic eruptions can be detected Source: Aerosol_cci2 User Requirements Document v3.0, 2017
			B	1 (at 10km altitude) 2 (at 30 km altitude)	
			T	2	
Temporal Resolution	day	All the indicated averaging times are assumed to be representative	G	5	With 5 days also minor volcanic eruptions can be detected, with 30 days only medium to large eruptions can be detected Source: Bingen, et al., 2017 and Popp, et al., 2016
			B	5	
			T	30	
Timeliness	Year		G		No near-real time usage foreseen; climate studies are main use
			B		
			T	1	
Required Measurement Uncertainty (2-sigma)	%	Uncertainty is dependent on the atmospheric aerosol load. These relative uncertainties refer to extinction values @532nm larger than 2.5 10 <sup>-2</sup> km <sup>-1</sup>	G	20	Source: Aerosol_cci2 User Requirements Document v3.0, 2017
			B	40	
			T		
Stability	% /decade	These percentages refer to extinction values	G	20	Source: Aerosol_cci2 User Requirements Document v3.0, 2017
			B	40	
			T		

	@532nm larger than 2.5 10 <sup>-2</sup> km <sup>-1</sup> .			
<b>Standards and References</b>	<p>ESA Aerosol_cci2, User Requirements Document, v3., 12.03.2017</p> <p>Christine Bingen, Charles E. Robert, Kerstin Stebel, Christoph Brühl, Jennifer Schallock, Filip Vanhellemont, Nina Mateshvili, Michael Höpfner, Thomas Trickl, John E. Barnes, Julien Jumelet, Jean-Paul Vernier, Thomas Popp, Gerrit de Leeuw, and Simon Pinnock, Stratospheric aerosol data records for the Climate Change Initiative: development, validation and application to Chemistry-Climate Modelling, Remote Sensing of Environment, 2017, <a href="http://dx.doi.org/10.1016/j.rse.2017.06.002">http://dx.doi.org/10.1016/j.rse.2017.06.002</a></p> <p>Section 4.4 of: Thomas Popp, Gerrit de Leeuw, Christine Bingen, Christoph Brühl, Virginie Capelle, Alain Chedin, Lieven Clarisse, Oleg Dubovik, Roy Grainger, Jan Griesfeller, Andreas Heckel, Stefan Kinne, Lars Klüser, Miriam Kosmale, Pekka Kolmonen, Luca Lelli, Pavel Litvinov, Linlu Mei, Peter North, Simon Pinnock, Adam Povey, Charles Robert, Michael Schulz, Larisa Sogacheva, Kerstin Stebel, Deborah Stein Zweers, Gareth Thomas, Lieuwe Gijsbert Tilstra, Sophie Vandenbussche, Pepijn Veefkind, Marco Vountas and Yong Xue, Development, Production and Evaluation of Aerosol Climate Data Records from European Satellite Observations (Aerosol_cci), Remote Sensing, 8, 421; doi: 10.3390/rs8050421, 2016</p>			

### 3.4.3 ECV Product: Multi-wavelength Aerosol Optical Depth

Name	Multi-wavelength Aerosol Optical Depth				
Definition	Multi-wavelength AOD is the spectral dependent aerosol extinction coefficient integrated over the geometrical path length. (see note)				
Unit	dimensionless				
Note	<p>Aerosol Optical Depth quantifies the extinction of the radiation while propagating in an aerosol layer and reflects the aerosol loading information in the view of remote sensing measurement. AOD varies with wavelength and this variation is related to the aerosol size and type. The GAW guidelines recommend AOD be measured at 3 or more wavelengths among 368, 412, 500, 675, 778, and 862 nm with a bandwidth of 5nm.</p> <p>1) under some assumptions of aerosol models and surface reflectances, spectral-dependence of AOD permits retrieval of Fine-AOD and Coarse-AOD, defined as the fraction of total aerosol optical depth attributed to the "non-dust" and "dust" aerosols, respectively, which are important parameters to distinguish aerosol type. Also sea-salt is part of the coarse mode AOD</p> <p>2) The absorption aerosol optical depth(AAOD) is the fraction of AOD related to light absorption and is defined as <math>AAOD=(1-\omega_0)\times AOD</math> where <math>\omega_0</math> is the column integrated aerosol single scattering albedo.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	20	
			B	100	
			T	500	
Vertical Resolution	N/A		G		Column integrated
			B		
			T		
Temporal Resolution	day		G	0.01	All averages assumed to be representative
			B	1	
			T	30	
Timeliness	day		G	1	
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	% or AOD		G	4% or 0.02	
			B	10% or 0.030	
			T	20% or 0.06	
Stability	% /decade or AOD/decade		G	2% or 0.01	
			B	4% or 0.02	
			T	10% or 0.04	
Standards and References	<p>Levy, R. C., Mattoo, S., Munchak, L. A., Remer, L. A., Sayer, A. M., Patadia, F., and Hsu, N. C.: The Collection 6 MODIS aerosol products over land and ocean, Atmos. Meas. Tech., 6, 2989–3034, <a href="https://doi.org/10.5194/amt-6-2989-2013">https://doi.org/10.5194/amt-6-2989-2013</a>, 2013</p> <p>CIMO-WMO report No 1019, "Abridged final report with resolutions and recommendations", 2006</p> <p>Giles, D. M., Sinyuk, A., Sorokin, M. G., Schafer, J. S., Smirnov, A., Slutsker, I., Eck, T. F., Holben, B. N., Lewis, J. R., Campbell, J. R., Welton, E. J., Korkin, S. V., and Lyapustin, A. I.: Advancements in the Aerosol Robotic Network (AERONET) Version 3 database – automated near-real-time quality control algorithm with improved cloud screening for Sun photometer aerosol optical depth (AOD) measurements, Atmos. Meas. Tech., 12, 169–209, <a href="https://doi.org/10.5194/amt-12-169-2019">https://doi.org/10.5194/amt-12-169-2019</a>, 2019</p> <p>Cuevas, E., Romero-Campos, P. M., Kouremeti, N., Kazadzis, S., Räisänen, P., García, R. D., Barreto, A., Guirado-Fuentes, C., Ramos, R., Toledano, C., Almansa, F., and Gröbner, J.: Aerosol optical depth comparison between GAW-PFR and AERONET-Cimel radiometers from long-term (2005–2015) 1 min synchronous measurements, Atmos. Meas. Tech., 12, 4309–4337, <a href="https://doi.org/10.5194/amt-12-4309-2019">https://doi.org/10.5194/amt-12-4309-2019</a>, 2019</p> <p>Kazadzis, S., Kouremeti, N., Nyeki, S., Gröbner, J., and Wehrli, C.: The World Optical Depth Research and Calibration Center (WORCC) quality assurance and quality control of GAW-PFR AOD measurements, Geosci. Instrum. Method. Data Syst., 7, 39-53, <a href="https://doi.org/10.5194/gi-7-39-2018">https://doi.org/10.5194/gi-7-39-2018</a>, 2018a.</p> <p>Kazadzis, S., Kouremeti, N., Diémoz, H., Gröbner, J., Forgan, B. W., Campanelli, M., Estellés, V., Lantz, K., Michalsky, J., Carlund, T., Cuevas, E., Toledano, C., Becker, R., Nyeki, S., Kosmopoulos, P. G., Tatsiankou, V., Vuilleumier, L., Denn, F. M., Ohkawara, N., Ijima, O., Goloub, P., Raptis, P. I., Milner, M., Behrens, K., Barreto, A., Martucci, G., Hall, E., Wendell, J., Fabbri, B. E., and Wehrli, C.:</p>				



Results from the Fourth WMO Filter Radiometer Comparison for aerosol optical depth measurements, Atmos. Chem. Phys., 18, 3185-3201, <https://doi.org/10.5194/acp-18-3185-2018>, 2018b.  
Schutgens, N., Tsyro, S., Gryspeerdt, E., Goto, D., Weigum, N., Schulz, M., and Stier, P.: On the spatio-temporal representativeness of observations, Atmos. Chem. Phys., 17, 9761–9780, <https://doi.org/10.5194/acp-17-9761-2017>, 2017.

### 3.4.4 ECV product: Chemical Composition of Aerosol Particles

Name	Chemical Composition of aerosol particles				
Definition	Aerosol particles are chemically composed of inorganic salts (ammonium sulfates, ammonium nitrate, and sea salt), organic compounds, Elemental Carbon (EC), dust, and volcanic ash. These species are often internally mixed within a particle with mixtures depending on sources (primary particles and gas phase precursors), atmospheric processes (gas to particle conversion, cloud processing, and condensation), and atmospheric conditions (T, P, and RH). The chemical composition of aerosol particles is often expressed in $\mu\text{g m}^{-3}$ .				
Unit	$\mu\text{g m}^{-3}$				
Note	Climate relevant properties of aerosol particles include hygroscopicity and refractive index. To a first approximation knowledge of the speciated amounts of key components (total inorganics – including sea-salt-, organics, Equivalent Black Carbon, mineral dust, and volcanic ash) is sufficient. Dust can be approximated from the difference between total Mass and sum of Inorganic, EC and OC. As a proxy for the chemical composition, combination of different properties can be used, e.g. size (from Extinction Angström exponent or Fine Mode fraction), absorption (from SSA or AAD), absorption colour (Absorption Angström exponent). However, any such estimated characterization needs to be associated with a clear definition how a certain aerosol type was characterized and this should be part of the metadata in a product file.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	50	Horizontal definition based on Anderson et al., 2003
			B	100	
			T	500	
Vertical Resolution	km		G	1	Information on both single point AND integrated column are valuable as a threshold. More precise information can be obtained by using a profile at 5km resolution (breakthrough) or 1 km (Goal).
			B	5	
			T	Column integrated or single point	
Temporal Resolution	day	All averages assumed to be representative	G	1	
			B	30	
			T	90	
Timeliness	day		G	0.1	
			B	1	
			T	365	
Required Measurement Uncertainty (2-sigma)	%		G	20	
			B	40	
			T	60	
Stability	%/decade		G	2	
			B	2	
			T	4	
Standards and References	Anderson, T. L., R. J. Charlson, D. M. Winker, J. A. Ogren, and K. Holmén, Mesoscale variations of tropospheric aerosols, <i>J. Atmos. Sci.</i> , 60, 119– 136, 2003. Aas, W., Mortier, A., Bowersox, V. et al. Global and regional trends of atmospheric sulfur. <i>Sci Rep</i> 9, 953 (2019) doi:10.1038/s41598-018-37304-0. Putaud, J. P., Raes, F., Van Dingenen, R., Brüggemann, E., Facchini, M. C., Decesari, S., Fuzzi, S., Gehrig, R., Hüglin, C., Laj, P., Lorbeer, G., Maenhaut, W., Mihalopoulos, N., Müller, K., Querol, X., Rodriguez, S., Schneider, J., Spindler, G., Ten Brink, H., Tørseth, K., and Wiedensohler, A.: European aerosol phenomenology – 2: chemical characteristics of particulate matter at kerbside, urban, rural and background sites in Europe, <i>Atmos. Environ.</i> , 38, 2579–2595, 2004.				

### 3.4.5 ECV Product: Number of Cloud Condensation Nuclei

Name		Number of Cloud Condensation Nuclei			
Definition	Number of aerosol particles which can activate to a cloud droplet at a given supersaturations of water. CCN is often indicated as a percent of the total CN for specific supersaturation typical of atmospheric cloud formation.				
Unit	dimensionless				
Note	CCN depends on the supersaturation. Whenever provision of CCN for a range of supersaturation is not available, a typical value of 0.5% can be used as typical supersaturation under atmospheric conditions. The CCN number concentration can be approximated by the fraction of particles larger than a given diameter from the particle number size distribution, generally the number of particles larger than 100 nm, which provide a good approximation of particles activated at « typical » supersaturation. Where no other data are available, fine mode AOD can be used as a qualitative proxy for CCN				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	50	Horizontal definition based on Anderson et al., 2003, Sun et al., 2019 and Laj et al., submitted
			B	100	
			T	500	
Vertical Resolution	km		G	1	Information on both single point AND integrated column are valuable as a threshold. More precise information can be obtained by using a profile at 5km resolution (breakthrough) or 1 km (Goal).
			B	5	
			T	Column integrated or single point	
Temporal Resolution	day	All averages assumed to be representative	G	0.5	
			B	1	
			T	30	
Timeliness	day		G	0.04	
			B	1	
			T	365	
Required Measurement Uncertainty (2-sigma)	%		G	20	
			B	40	
			T	60	
Stability	% /decade		G	-	Stability difficult to evaluate as no trend in CCN are currently available
			B	-	
			T	-	
Standards and References	Anderson, T. L., R. J. Charlson, D. M. Winker, J. A. Ogren, and K. Holmén, Mesoscale variations of tropospheric aerosols, <i>J. Atmos. Sci.</i> , 60, 119– 136, 2003. Fanourgakis, GS, Kanakidou, M, Nenes, A, Bauer, SE, Bergman, T, Carslaw, KS, Grini, A, Hamilton, DS, Johnson, JS, Karydis, VA, Kirkevag, A, Kodros, JK, Lohmann, U, Luo, G, Makkonen, R, Matsui, H, Neubauer, D, Pierce, JR, Schmale, J, Stier, P, Tsigaridis, K, van Noije, T, Wang, HL, Watson-Parris, D, Westervelt, DM, Yang, Y, Yoshioka, M, Daskalakis, N, Decesari, S, Gysel-Beer, M, Kalivitis, N, Liu, XH, Mahowald, NM, Myriokefalitakis, S. Schrodner, R, Sfakianaki, M, Tsimpidi, AP, Wu, MX, Yu, FQ, "Evaluation of global simulations of aerosol particle and cloud condensation nuclei number, with implications for cloud droplet formation," <i>Atmos. Chem. Phys.</i> , 19, 8591-8617 DOI:10.5194/acp-19-8591-2019, 2019. Schmale, J., Henning, S., Henzing, J.S., Keskinen, H., Sellegri, K., Ovadnevaite, J., Bougiatioti, A., Kalivitis, N., Stavroulas, I., Jefferson, A., Park, M., Schlag, P., Kristensson, A., Iwamoto, Y., Aalto, P., Äijälä, M., Bukowiecki, N., Decesari, S., Ehn, M., Frank, G., Fröhlich, R., Frumau, A., Herrmann, E., Holzinger, R., Kos, G., Kulmala, M., Mihalopoulos, N., Motos, G., Nenes, A., O'Dowd, C.D., Paramonov, M., Petäjä, T., Picard, D., Poulain, L., Prévôt, A.S.H., Swietlicki, E., Pöhlker, M., Pöschl, U., Artaxo, P., Brito, J., Carbone, S., Wiedensohler, A., Ogren, J., Matsuki, A., Yum, S.S., Stratmann, F., Baltensperger, U. and Gysel, M. (2017) What do we learn from long-term cloud condensation nuclei number concentration, particle number size distribution and chemical composition at regionally representative observatories? <i>Sci. Data</i> 4:170003, doi: 10.1038/sdata.2017.3.				

### 3.4.6 ECV Product: Aerosol Number Size Distribution

Name		Aerosol Number Size Distribution			
Definition	The particle number size distribution (PNSD) describes the number of particles in multiple specified size ranges.				
Unit	dimensionless				
Note	<p>The PNSD can provide information about primary particle sources and secondary formation processes, as well as aerosol transport. PNSD can be directly measured in-situ or retrieved under some assumptions from AOD-related measurements or light extinction vertical profile measurements. For climate application, PNSD at ambient relative humidity is relevant.</p> <p>As a proxy for a directly measured aerosol number size distribution, the extinction (scattering) Angstrom exponent, defined as the dependence of <math>\ln(\text{AOD})</math> (or <math>\ln(\sigma_{\text{sp}})</math>) on <math>\ln(\lambda)</math> can be used as a qualitative indicator of aerosol particle size distribution. Values near 1 indicate a particle size distribution dominated by coarse mode aerosol such as typically associated with mineral dust and sea salt. Values of near 2 indicate particle size distributions dominated by the fine aerosol mode (usually associated with anthropogenic sources and biomass burning).</p> <p>The total number of particles (i.e., condensation nuclei (CN)) is the integral of PNSD over all size ranges. It can be used to derive PNSD under some assumptions.</p> <p>Whenever PNSD is retrieved at dry size, ambient PNSD can be retrieved with the knowledge of particle composition and hygroscopic growth model under some assumptions</p> <p>Number of particles below 20 nm (in diameter) are highly variable due to the process of New Particle Formation and have little direct radiative impact. Regardless, the requirement for aerosol number size distribution ideally is provided for the full size spectrum (15 nm- 15 <math>\mu\text{m}</math>) (defined as goal). Very important climate application can be made with knowledge of PNSD into 2 size ranges (fine and coarse), defined as Threshold). Knowledge of PNSD into 4 size ranges (ultrafine, Aitken, Accumulation and coarse) is defined as breakthrough.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	50	Horizontal definition based on Anderson et al., 2003, Sun et al., 2019 and Laj et al., submitted
			B	100	
			T	500	
Vertical Resolution	km		G	1	Information on both single point AND integrated column are valuable as a threshold. More precise information can be obtained by using a profile at 5km resolution (breakthrough) or 1 km (Goal).
			B	5	
			T	Column integrated or single point	
Temporal Resolution	day	All averages assumed to be representative	G	0.04	
			B	1	
			T	30	
Timeliness	day		G	0,25	
			B	30	
			T	365	
Required Measurement Uncertainty (2-sigma)			G	40% in number and 20% on size	Size distribution is a 2-D variable thus uncertainty can either refer size or number. Uncertainty requirements are therefore provided for both dimensions. The uncertainty on size refers to the diameter of the mode of the distribution
			B	60% in number in 40% in size	
			T	40% in number for fine-mode (0.05-0.5 $\mu\text{m}$ ) and 100% in number for coarse-mode (0.5-15 $\mu\text{m}$ )	
Stability	% /decade		G	2	
			B	4	
			T	10	

<b>Standards and References</b>	<p>Laj et al., A global analysis of climate-relevant aerosol properties retrieved from the network of GAW near-surface observatories, submitted to AMT</p> <p>Anderson, T. L., R. J. Charlson, D. M. Winker, J. A. Ogren, and K. Holmén, Mesoscale variations of tropospheric aerosols, <i>J. Atmos. Sci.</i>, 60, 119– 136, 2003.</p> <p>Sun, J., W. Birmili, M. Hermann, T. Tuch, K. Weinhold, G. Spindler, A. Schladitz, S. Bastian, G. Löschau, J. Cyrys, J. Gu, H. Flentje, B. Briel, C. Asbach, H. Kaminski, L. Ries, R. Sohmer, H. Gerwig, K. Wirtz, F. Meinhardt, A. Schwerin, O. Bath, N. Ma, A. Wiedensohler, Variability of black carbon mass concentrations, sub-micrometer particle number concentrations and size distributions: results of the German Ultrafine Aerosol Network ranging from city street to High Alpine locations, <i>Atmospheric Environment</i>, Volume 202, 2019, Pages 256-268, ISSN 1352-2310, <a href="https://doi.org/10.1016/j.atmosenv.2018.12.029">https://doi.org/10.1016/j.atmosenv.2018.12.029</a>.</p> <p>Wiedensohler, A., Birmili, W., Nowak, A., Sonntag, A., Weinhold, K., Merkel, M., Wehner, B., Tuch, T., Pfeifer, S., Fiebig, M., Fjåraa, A. M., Asmi, E., Sellegri, K., Depuy, R., Venzac, H., Villani, P., Laj, P., Aalto, P., Ogren, J. A., Swietlicki, E., Williams, P., Roldin, P., Quincey, P., Hüglin, C., Fierz-Schmidhauser, R., Gysel, M., Weingartner, E., Riccobono, F., Santos, S., Gruning, C., Faloon, K., Beddows, D., Harrison, R., Monahan, C., Jennings, S. G., O'Dowd, C. D., Marinoni, A., Horn, H.-G., Keck, L., Jiang, J., Scheckman, J., McMurry, P. H., Deng, Z., Zhao, C. S., Moerman, M., Henzing, B., de Leeuw, G., Löschau, G., and Bastian, S.: Mobility particle size spectrometers: harmonization of technical standards and data structure to facilitate high quality long-term observations of atmospheric particle number size distributions, <i>Atmos. Meas. Tech.</i>, 5, 657–685, <a href="https://doi.org/10.5194/amt-5-657-2012">https://doi.org/10.5194/amt-5-657-2012</a>, 2012.</p>
---------------------------------	---

### 3.4.7 ECV Product: Aerosol Single Scattering Albedo

Name	Aerosol Single Scattering Albedo				
Definition	Spectrally dependent ratio of particle light scattering coefficient to the particle light extinction coefficient				
Unit	dimensionless				
Note	<p>The Aerosol Single Scattering Albedo (<math>\omega_0</math> or SSA) is defined as <math>\sigma_{sp}/\sigma_{ep}</math>, or <math>\sigma_{sp}/(\sigma_{sp} + \sigma_{ap})</math> where (<math>\sigma_{ep}</math>), is the volumetric cross-section for light extinction and is commonly called the particle light extinction coefficient typically reported in units of <math>Mm^{-1}</math> (<math>10^{-6} m^{-1}</math>). It is the sum of the particle light scattering (<math>\sigma_{sp}</math>) and particle light absorption coefficients (<math>\sigma_{ap}</math>), <math>\sigma_{ep} = \sigma_{sp} + \sigma_{ap}</math>. All coefficients are spectrally dependent.</p> <p>Purely scattering aerosol particles (e.g., ammonium sulfate) have values of 1, while very strong absorbing aerosol particles (e.g., black carbon) may have values of around 0.3 at 550nm.</p> <p>The absorption aerosol optical depth(AAOD) is fraction of AOD related to light absorption and is defined as <math>AAOD = (1 - \omega_0) \times AOD</math> where <math>\omega_0</math> is the column integrated single scattering albedo. Under some circumstances, AAOD at 550 nm is not as highly uncertain as SSA (in particular for low AOD) and can be used as ECV proxy for absorption. By part of the community AAOD is regarded better suited than SSA which is highly uncertain at low AOD.</p>				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	50	Anderson et al., 2003 Laj et al., submitted)
			B	200	
			T	500	
Vertical Resolution	km		G	1	Information on both single point AND integrated column are valuable as a threshold. More precise information can be obtained by using a profile at 5km resolution (breakthrough) or 1 km (Goal). SSA is not directly measurable as integrated column or profile but can be retrieved under some assumptions.
			B	5	
			T	Column Integrated/ or single point	
Temporal Resolution	day		G	0.01	All averages assumed to be representative
			B	1	
			T	30	
Timeliness	day		G	1	
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	dimensionless		G	0.1	
			B	0.2	
			T	0.4	
Stability	% /decade		G	0.1	Stability difficult to assess due to lack of clear trends observed
			B	0.4	
			T	1	
Standards and References	<p>Laj et al., A global analysis of climate-relevant aerosol properties retrieved from the network of GAW near-surface observatories, submitted to AMT</p> <p>Collaud Coen et al., Multidecadal trend analysis of aerosol radiative properties at a global scale, submitted to ACP</p> <p>Sherman, J. P., Sheridan, P. J., Ogren, J. A., Andrews, E., Hageman, D., Schmeisser, L., Jefferson, A., and Sharma, S.: A multi-year study of lower tropospheric aerosol variability and systematic relationships from four North American regions, Atmos. Chem. Phys., 15, 12487–12517, <a href="https://doi.org/10.5194/acp-15-12487-2015">https://doi.org/10.5194/acp-15-12487-2015</a>, 2015.</p> <p>Schutgens, N., Tsyro, S., Gryspeerd, E., Goto, D., Weigum, N., Schulz, M., and Stier, P.: On the spatio-temporal representativeness of observations, Atmos. Chem. Phys., 17, 9761–9780, <a href="https://doi.org/10.5194/acp-17-9761-2017">https://doi.org/10.5194/acp-17-9761-2017</a>, 2017.</p>				

## **A2. Ocean ECVs**

## 4. PHYSICS

### 4.1 Sea-surface temperature

#### 4.1.1 ECV Product: Sea-surface temperature

Name						Sea surface temperature										
Definition						Radiative skin sea surface temperature, or Bulk sea surface temperature at stated depth										
Unit						Kelvin (K)										
Note						The “bulk” temperature refers to the depth of typically 2 m, the “skin” temperature refers to within the upper 1 mm.										
Requirements																
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards											
Horizontal Resolution	km	length	G	5												
			B													
			T	100												
Vertical Resolution	N/A		G													
			B													
			T													
Temporal Resolution	day	time	G	1/24	In situ measurements, daily in the case of satellite measurements											
			B													
			T	7												
Timeliness	hour	time	G	3												
			B													
			T	24												
Required Measurement Uncertainty (2-sigma)	K		G	0.05	Over 100 km scale											
			B													
			T	0.3							Over 100 km scale					
Stability	K		G													
			B													
			T													
Standards and References	<ul style="list-style-type: none"> <li>Johnson et al (2015): Informing Deep Argo Array Design Using Argo and Full-Depth Hydrographic Section Data; <a href="https://journals.ametsoc.org/doi/full/10.1175/JTECH-D-15-0139.1">https://journals.ametsoc.org/doi/full/10.1175/JTECH-D-15-0139.1</a>; 5 x 5 degree array proposed with 15-day repeat cycle. Estimated reduction of sub-2000 m OHC error in decadal trends from +/- 17 TW to +/- 3 TW.</li> <li>Palmer et al (2010): Future Observations for Monitoring Global Ocean Heat Content; <a href="http://www.oceanobs09.net/proceedings/cwp/Palmer-OceanObs09.cwp.68.pdf">http://www.oceanobs09.net/proceedings/cwp/Palmer-OceanObs09.cwp.68.pdf</a>; Table 1 in the paper includes GCOS Observation Requirements in WMO/CEOS Database for upper ocean temperature and salinity</li> <li>Abraham et al (2013): A review of global ocean temperature observations: Implications for ocean heat content estimates and climate change; <a href="https://agupubs.onlinelibrary.wiley.com/doi/full/10.1002/rog.20022">https://agupubs.onlinelibrary.wiley.com/doi/full/10.1002/rog.20022</a>; Review of the historical temperature measurements and comparison of estimated rates of OHC change. I can't see any recommended sampling characteristics or sensor accuracies (based on a quick scan of the document).</li> <li>Desbruyeres et al (2017): Global and Full-Depth Ocean Temperature Trends during the Early Twenty-First Century from Argo and Repeat Hydrography; <a href="https://journals.ametsoc.org/doi/full/10.1175/JCLI-D-16-0396.1">https://journals.ametsoc.org/doi/full/10.1175/JCLI-D-16-0396.1</a>; "Estimate of global ocean heat uptake of <math>0.71 \pm 0.09 \text{ W m}^{-2}</math> during 2006-2014 with &lt; 2000m layer accounting for 90% of the observed change.</li> </ul>															



## 4.2 Subsurface temperature

### 4.2.1 ECV Product: Interior temperature

Name		Interior temperature			
Definition		Seawater temperature measured with depth			
Unit		Kelvin (K)			
Note		This variable is referred to as "Ocean temperature" in WMO RRR, and a difference between Upper (<2000 m) and Deep (>2000 m) ocean is established			
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	Upper ocean: 10 Deep ocean: 100 Coastal: 1	
			B	Upper ocean: 100 Deep ocean: 250	
			T	Upper ocean: 300 Deep ocean: 500 Coastal: 10	
Vertical Resolution	N/A		G	Upper ocean: 1	
			B	Upper ocean: 2	
			T	Upper ocean: 10	
Temporal Resolution	day		G	Upper ocean: 1 Deep ocean: 1 Coastal: 1/24	
			B	Upper ocean: 10 Deep ocean: 15	
			T	Upper ocean: 30 Deep ocean: 30 Coastal: 30	
Timeliness	day	From observation day	G	1 for real time/90 in delayed mode	
			B	1 for real time/180 in delayed mode	
			T	30 for real time/365 in delayed mode	
Required Measurement Uncertainty (2-sigma)	K		G	Upper ocean: 0.001 Deep ocean: 0.001	
			B		
			T	Upper ocean: 0.1 Deep ocean: 0.01 Coastal: 0.1	
Stability	K				

**Standards  
and  
References**

- Johnson et al (2015): Informing Deep Argo Array Design Using Argo and Full-Depth Hydrographic Section Data; <https://journals.ametsoc.org/doi/full/10.1175/JTECH-D-15-0139.1> ; 5 x 5 degree array proposed with 15-day repeat cycle. Estimated reduction of sub-2000 m OHC error in decadal trends from +/- 17 TW to +/- 3 TW.
- Palmer et al (2010): Future Observations for Monitoring Global Ocean Heat Content; <http://www.oceanobs09.net/proceedings/cwp/Palmer-OceanObs09.cwp.68.pdf>; Table 1 in the paper includes GCOS Observation Requirements in WMO/CEOS Database for upper ocean temperature and salinity
- Abraham et al (2013): A review of global ocean temperature observations: Implications for ocean heat content estimates and climate change; <https://agupubs.onlinelibrary.wiley.com/doi/full/10.1002/rog.20022>; Review of the historical temperature measurements and comparison of estimated rates of OHC change. I can't see any recommended sampling characteristics or sensor accuracies (based on a quick scan of the document).
- Desbruyeres et al (2017) : Global and Full-Depth Ocean Temperature Trends during the Early Twenty-First Century from Argo and Repeat Hydrography; <https://journals.ametsoc.org/doi/full/10.1175/JCLI-D-16-0396.1>; "Estimate of global ocean heat uptake of  $0.71 \pm 0.09 \text{ W m}^{-2}$  during 2006-2014 with < 2000m layer accounting for 90% of the observed change.

## 1. Sea-surface salinity

### 4.2.2 ECV Product: Sea-surface salinity

Name						Sea-surface salinity					
Definition						Salinity of seawater, at or near the surface					
Unit						psu, pss, g/Kg, or no unit					
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	10 Coastal: 1							
			B								
			T	100 Coastal: 10							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution	day		G	1-3							
			B								
			T	7							
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	1		G	0.1 psu for 25-km spatial average and monthly mean; 0.015 psu for 500-km spatial average and monthly mean	Synthesis of coordinated input from ESA based on community workshop and numerous published references						
			B								
			T	0.2 psu for 100-km spatial average and monthly mean; 0.01 psu for 1000-km spatial average and annual mean	Synthesis of coordinated input from ESA based on community workshop and numerous published references						
Stability			G								
			B								
			T	0.01 psu/decade for 1000-km average							Durack and Wijffels (2012) (showing trends of 0.4 psu over 5 decades on 1000-km scales)
Standards and References	<ul style="list-style-type: none"> <li>Durack, Paul J., Susan E. Wijffels and Richard J. Matear (2012): Ocean Salinities Reveal Strong Global Water Cycle Intensification During 1950 to 2000, <i>Science</i>, 336 (6080), pp 455-458. DOI: 10.1126/science.1212222</li> <li>Sea Surface Salinity Climate Change Initiative Phase 1 - User Requirement Document (2019). Available at: <a href="https://climate.esa.int/sites/default/files/SSS_cci-D1.1-URD-v1r4_signed-accepted.pdf">https://climate.esa.int/sites/default/files/SSS_cci-D1.1-URD-v1r4_signed-accepted.pdf</a></li> </ul>										

### 4.3 Subsurface salinity

#### 4.3.1 ECV Product: Interior salinity

Name	Interior salinity				
Definition	Salinity of seawater measured with depth				
Unit	psu, pss, g/Kg, or no unit				
Note	This variable is referred to as "Ocean salinity" in WMO RRR OSCAR <a href="#">database</a> , and a difference between Upper (<2000 m) and Deep (>2000 m) ocean is established				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B		
			T	100	
Vertical Resolution	m		G	Upper ocean: 1 Deep ocean: 1	
			B		
			T	Upper ocean: 10 Deep ocean: 100	
Temporal Resolution	day		G	1	
			B		
			T	30	
Timeliness	day		G	1	
			B		
			T	30	
Required Measurement Uncertainty (2-sigma)	1		G	Upper ocean: 0.01 Deep ocean: 0.005	
			B		
			T	Upper ocean: 0.05 Deep ocean: 0.02	
Stability			G		
			B		
			T		
Standards and References					

## 4.4 Surface currents

### 4.4.1 ECV Product: Ekman currents

Name		Ekman currents			
Definition		Ocean vector motion occurring over the depth of the Ekman layer as a result of the combined action of surface winds and Coriolis force.			
Unit		m/s			
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B	20	
			T	25	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	hour		G	1	
			B		
			T	6	
Timeliness	hour		G	1	
			B		
			T	3	
Required Measurement Uncertainty (2-sigma)	m/s		G	0.02	
			B		
			T	0.1	
Stability			G		
			B		
			T		
Standards and References					

#### 4.4.2 ECV Product: Surface geostrophic current

Name						Ekman currents					
Definition						Ocean vector motion occurring over the depth of the Ekman layer as a result of the combined action of surface winds and coriolis force.					
Unit						m/s					
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	10							
			B	20							
			T	100							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution	day		G	1/4							
			B	1							
			T	7							
Timeliness	day		G								
			B								
			T	1							
Required Measurement Uncertainty (2-sigma)	m/s		G	0.02							
			B								
			T	0.1							
Stability			G								
			B								
			T								
Standards and References	<ul style="list-style-type: none"> <li>Villas Bôas et al. (2019) Integrated Observations of Global Surface Winds, Currents, and Waves: Requirements and Challenges for the Next Decade. Front. Mar.Sci. 6:425. doi: 10.3389/fmars.2019.00425</li> <li><a href="http://globcurrent.ifremer.fr/products-data">http://globcurrent.ifremer.fr/products-data</a></li> </ul>										

## 4.5 Subsurface currents

### 4.5.1 ECV Product: Vertical mixing

<b>Name</b>	Vertical mixing				
<b>Definition</b>	Ocean vector motion measured at or near the surface (at stated depth)				
<b>Unit</b>	m/s				
<b>Note</b>	A difference between Upper (<2000 m) and Deep (>2000 m) ocean is established				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
Horizontal Resolution			G	10	
			B		
			T	100	
Vertical Resolution	m		G	Upper ocean: 1 Deep ocean: 10	
			B		
			T	Upper ocean: 10 Deep ocean: 100	
Temporal Resolution	day		G	1	
			B	7	
			T	30	
Timeliness	day		G		
			B		
			T	30	
Required Measurement Uncertainty (2-sigma)			G		
			B		
			T		
Stability			G		
			B		
			T		
<b>Standards and References</b>					

## 4.6 Sea level

### 4.6.1 ECV Product: Regional mean sea level

Name						Regional mean sea level					
Definition											
Unit											
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution			G	10							
			B								
			T	100							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution	day		G	1							
			B								
			T	7							
Timeliness	day		G	30							
			B								
			T	365							
Required Measurement Uncertainty (2-sigma)	mm		G								
			B								
			T	10							Over a grid mesh of 50-100 km
Stability	mm/yr		G	0.3	Over a grid mesh of 50-100 km						
			B								
			T	<0.1							Over a grid mesh of 50-100 km
Standards and References	<ul style="list-style-type: none"> <li>Ponte, R.M., Carson, M., Cirano, M., Domingues, C.M., Jevrejeva, S., Marcos, M., Mitchum, G., Van De Wal, R.S.W., Woodworth, P.L., Ablain, M. and Arduin, F., 2019. Towards comprehensive observing and modeling systems for monitoring and predicting regional to coastal sea level. <i>Frontiers in Marine Science</i>, p.437.</li> <li>Benveniste, J., Cazenave, A., Vignudelli, S., Fenoglio-Marc, L., Shah, R., Almar, R., et al. (2019). Requirements for a coastal zone observing system. <i>Front. Mar. Sci.</i> 6:348. doi: 10.3389/fmars.2019.00348</li> </ul>										



#### 4.6.2 ECV Product: Global mean sea level

Name		Global mean sea level			
Definition		The height of the ocean surface relative to a reference Geoid			
Unit		m			
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B		
			T	100	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	day		G	1	
			B		
			T	30	
Timeliness	day		G	30	
			B		
			T	365	
Required Measurement Uncertainty (2-sigma)	mm		G		
			B		
			T	2-4	
Stability	mm/yr		G	< 0.03	Target to be considered for the detection of permafrost melting. From the WCRP grand challenge on sea level and coastal impacts the required stability in GMSL is <0.03 mm/yr per decade (90%CL) to detect permafrost thawing.
			B	< 0.1	Value per decade, 90% CI. Target to be considered for the estimation of deep ocean warming and Earth energy imbalance
			T	<0.3	Adapted for sea level impact detection (detection of a change in the rate of rise of the global mean sea level). From the WCRP grand challenge on sea level and coastal impacts the required stability in GMSL <0.3 mm/yr per decade (90%CL) for the detection attribution of sea level rise.
Standards and References	<ul style="list-style-type: none"> <li>The error budget of the global mean sea level derived from satellite altimetry strongly relies on the precise orbit determination of the platform, the instrumental, geophysical and environmental altimeter corrections used to derive the sea level anomalies.</li> <li>Meyssignac, B., Boyer, T., Zhao, Z., Hakuba, M.Z., Landerer, F.W., Stammer, D., Köhl, A., Kato, S., L'ecuyer, T., Ablain, M. and Abraham, J.P., 2019. Measuring global ocean heat content to estimate the Earth energy imbalance. <i>Frontiers in Marine Science</i>, 6, p.432.</li> <li>Cazenave, A., Hamlington, B., Horwath, M., Barletta, V.R., Benveniste, J., Chambers, D., Doll, P., Hogg, A.E., Legeais, J.F., Merrifield, M. and Meyssignac, B., 2019. Observational requirements for long-term monitoring of the global mean sea level and its components over the altimetry era. <i>Frontiers in Marine Science</i>, p.582.</li> </ul>				
Adaptation and Extremes					
	Relevant? (Yes/No)	Sugg. Req. sufficient? (Yes/No)	Explanation		
Adaptation[2]	Yes	Yes	The global mean sea level reflects changes of the ocean surface due to water mass transfer from the cryosphere, atmosphere and land and due to the volume changes (thermal expansion).		
Extremes[3]	Yes	Yes	Due to its role of integrator of the consequences of climate change, the global mean sea level is adapted to monitor climate extremes such as ENSO interannual variations.		

## 4.7 Sea state

### 4.7.1 ECV Product: Wave height

Name	Wave height				
Definition	The distance between the trough of the wave and the adjacent crest of the wave. The significant wave height is the mean wave height (trough to crest) of the highest third of the waves in a wave spectrum				
Unit	cm				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	1	Needed to resolve sea state variability in the coastal zone
			B	25	Needed to resolve mesoscale variability
			T	100	Needed to resolve synoptic scales associated with atmospheric systems
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	hour		G	1	Needed to resolve sea state variability in the coastal zone (tidal modulation of the sea state)
			B	3	Needed to resolve sea state variability at the scale of storm events
			T	24	Needed to compute robust monthly statistics
Timeliness			G	7	To support assessment of extreme storm/cyclonic event
			B	30	To support assessment of seasonal extreme event
			T	365	For assessment and reanalysis
Required Measurement Uncertainty (2-sigma)	%	Normalized root-mean-squared error	G	5	Uncertainty goal, as proposed by Ardhuin et al., 2019
			B		
			T		
Stability	cm/decade		G	1	Needed to account for wave impact (wave setup) on coastal sea level
			B		
			T	10	Needed to detect the largest trends. Existing long-term observations show maximum
Standards and References	<ul style="list-style-type: none"> <li>Ardhuin, F. et al. 2019. Observing Sea States. Front. Mar. Sci. 6.</li> </ul>				
Adaptation and Extremes					
	Relevant? (Yes/No)	Sugg. Req. sufficient? (Yes/No)	Explanation		
Adaptation[2]	Yes	Yes	Increasing Hs may accelerate coastal erosion and enhance SLR impact. Long-term records are needed to design coastal defence and infrastructure		
Extremes[3]	Yes	Yes	Extreme wave height impact marine safety, shipping routes, offshore platforms, coastal areas. High-resolution data is needed to mitigate flood risks.		

## 4.8 Surface stress

### 4.8.1 ECV Product: Surface stress

Name		Ocean surface stress			
Definition		The two-dimensional vector drag at the bottom of the atmosphere and the dynamical forcing at the top of the ocean			
Unit		N/m <sup>2</sup>			
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B		
			T	100	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	day		G	1/24	
			B		
			T	1	
Timeliness	day		G	1/4	
			B		
			T	1	
Required Measurement Uncertainty (2-sigma)	N/m <sup>2</sup>		G	0.004 or 2%	International Ocean Vector Wind Science Team; Cronin et al. (2019), <a href="https://doi.org/10.3389/fmars.2019.00430">https://doi.org/10.3389/fmars.2019.00430</a>
			B		
			T	0.02 or 8%	
Stability	N/m <sup>2</sup>		G	0.0006	International Ocean Vector Wind Science Team; Cronin et al. (2019), <a href="https://doi.org/10.3389/fmars.2019.00430">https://doi.org/10.3389/fmars.2019.00430</a>
			B		
			T	0.0001	
Standards and References					

## 4.9 Ocean surface heat flux

### 4.9.1 ECV Product: Radiative heat flux

Name		Radiative heat flux			
Definition	The heat exchanged between the ocean and atmosphere resulting from the balance between radiation leaving the sea surface (reflected and emitted) and radiation passing through the sea surface into the ocean; often divided into an infrared or longwave and a visible or shortwave component.				
Unit					
Note	Surface heat flux is the rate of exchange of heat, per unit area, crossing the sea surface from ocean to atmosphere. It has units Watts per square meter. The net heat flux is the sum of turbulent (latent and sensible) fluxes and the radiative (short wave and long wave) components. Oceanographic convention is that a positive flux implies heating of the ocean. Latent heat flux is associated with the phase change of water during evaporation or condensation and proportional to evaporation. Sensible heat flux is the rate at which heat is transferred from the ocean to the atmosphere by conduction and convection. In the tropics, latent heat flux is typically an order of magnitude greater than sensible heat flux, but in polar regions they are similar in magnitude. Downward shortwave at the surface is predominantly visible light. Upward shortwave flux is reflected sunlight, often determined by parameterization of surface albedo. While sensible, latent, and longwave heat fluxes occur at the sea surface, the shortwave radiation penetrates seawater and is absorbed with depth. These fluxes are major contributors to energy and moisture budgets, and are largely responsible for thermodynamic coupling of the ocean and atmosphere on all scales. Variability of these fluxes is in part related to largescale variability in weather (climate) patterns. For most regions, the two major components are the net shortwave gain by the ocean and the latent heat flux loss by the ocean.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B	25	
			T	100	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	hour		G	1	
			B	3	
			T	24	
Timeliness			G		
			B		
			T		
Required Measurement Uncertainty (2-sigma)	W/m <sup>2</sup>		G	10	
			B	15	
			T	20	
Stability	W/m <sup>2</sup>		G	2	
			B	2	
			T	2	
Standards and References	<ul style="list-style-type: none"> <li>Meghan F. Cronin et al (2019). Air-Sea Fluxes with a Focus on Heat and Momentum, <i>Frontiers in Marine Science</i>, 6, article 430, p1-30. <a href="https://www.frontiersin.org/articles/10.3389/fmars.2019.00430">https://www.frontiersin.org/articles/10.3389/fmars.2019.00430</a></li> <li>Meyssignac, Benoit, et al. "Measuring global ocean heat content to estimate the Earth energy imbalance." <i>Frontiers in Marine Science</i> 6 (2019): 432.</li> </ul>				

## 4.9.2 ECV Product: Sensible heat flux

Name		Sensible heat flux			
Definition	The heat exchanged between the atmosphere and ocean when a warmer ocean warms the air above or when a cooler ocean cools the air above.				
Unit					
Note	Surface heat flux is the rate of exchange of heat, per unit area, crossing the sea surface from ocean to atmosphere. It has units Watts per square meter. The net heat flux is the sum of turbulent (latent and sensible) fluxes and the radiative (short wave and long wave) components. Oceanographic convention is that a positive flux implies heating of the ocean. Latent heat flux is associated with the phase change of water during evaporation or condensation and proportional to evaporation. Sensible heat flux is the rate at which heat is transferred from the ocean to the atmosphere by conduction and convection. In the tropics, latent heat flux is typically an order of magnitude greater than sensible heat flux, but in polar regions they are similar in magnitude. Downward shortwave at the surface is predominantly visible light. Upward shortwave flux is reflected sunlight, often determined by parameterization of surface albedo. While sensible, latent, and longwave heat fluxes occur at the sea surface, the shortwave radiation penetrates seawater and is absorbed with depth. These fluxes are major contributors to energy and moisture budgets, and are largely responsible for thermodynamic coupling of the ocean and atmosphere on all scales. Variability of these fluxes is in part related to largescale variability in weather (climate) patterns. For most regions, the two major components are the net shortwave gain by the ocean and the latent heat flux loss by the ocean.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	10	
			B	25	
			T	100	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	hour		G	1	
			B	3	
			T	24	
Timeliness			G		
			B		
			T		
Required Measurement Uncertainty (2-sigma)	W/m <sup>2</sup>		G	10	
			B	15	
			T	20	
Stability	W/m <sup>2</sup>		G	2	
			B	2	
			T	2	
Standards and References	<ul style="list-style-type: none"> <li>Meghan F. Cronin et al (2019). Air-Sea Fluxes with a Focus on Heat and Momentum, <i>Frontiers in Marine Science</i>, 6, article 430, p1-30. <a href="https://www.frontiersin.org/articles/10.3389/fmars.2019.00430">https://www.frontiersin.org/articles/10.3389/fmars.2019.00430</a></li> <li>Meyssignac, Benoit, et al. "Measuring global ocean heat content to estimate the Earth energy imbalance." <i>Frontiers in Marine Science</i> 6 (2019): 432.</li> </ul>				

### 4.9.3 ECV Product: Latent heat flux

Name						Latent heat flux					
Definition						The heat exchanged between the ocean and atmosphere associated with the phase change from liquid to gas of seawater during evaporation or from gas to liquid during condensation.					
Unit											
Note						<p>Surface heat flux is the rate of exchange of heat, per unit area, crossing the sea surface from ocean to atmosphere. It has units Watts per squared meter. The net heat flux is the sum of turbulent (latent and sensible) fluxes and the radiative (short wave and long wave) components. Oceanographic convention is that a positive flux implies heating of the ocean. Latent heat flux is associated with the phase change of water during evaporation or condensation and proportional to evaporation. Sensible heat flux is the rate at which heat is transferred from the ocean to the atmosphere by conduction and convection. In the tropics, latent heat flux is typically an order of magnitude greater than sensible heat flux, but in polar regions they are similar in magnitude. Downward shortwave at the surface is predominantly visible light. Upward shortwave flux is reflected sunlight, often determined by parameterization of surface albedo. While sensible, latent, and longwave heat fluxes occur at the sea surface, the shortwave radiation penetrates seawater and is absorbed with depth. These fluxes are major contributors to energy and moisture budgets, and are largely responsible for thermodynamic coupling of the ocean and atmosphere on all scales. Variability of these fluxes is in part related to largescale variability in weather (climate) patterns. For most regions, the two major components are the net shortwave gain by the ocean and the latent heat flux loss by the ocean.</p>					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	10							
			B	25							
			T	100							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution	hour		G	1							
			B	3							
			T	24							
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	W/m <sup>2</sup>		G	10							
			B	15							
			T	20							
Stability	W/m <sup>2</sup>		G	2							
			B	2							
			T	2							
Standards and References						<ul style="list-style-type: none"> <li>Meghan F. Cronin et al (2019). Air-Sea Fluxes With a Focus on Heat and Momentum, <i>Frontiers in Marine Science</i>, 6, article 430, p1-30. <a href="https://www.frontiersin.org/articles/10.3389/fmars.2019.00430">https://www.frontiersin.org/articles/10.3389/fmars.2019.00430</a></li> <li>Meyssignac, Benoit, et al. "Measuring global ocean heat content to estimate the Earth energy imbalance." <i>Frontiers in Marine Science</i> 6 (2019): 432.</li> </ul>					

## 4.10 Sea ice

### 4.10.1 ECV Product: Sea Ice concentration

Name						Sea ice concentration					
Definition						Fraction of ocean area covered with sea ice.					
Unit						% (or 1)					
Note						Sea ice concentration (in %) or sea ice area fraction (0 ... 1) is a parameter that requires a spatial scale for reference; it is the fraction of a known ocean area (whatever size) covered with sea ice. Sea-ice extent (= the total area of all grid cells covered with sea ice above a certain threshold, often 15%) and sea-ice area (= the total area of all grid cells covered with sea ice using the actual sea-ice area fraction as weight) are indicators derived from sea-ice concentration. Some products report sea-ice concentration intervals, others are ice/water binary masks. The border of the sea ice covered area (below a given threshold, often 15% SIC) defines a sea ice edge.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	1	Near-coast applications (e.g. Canadian Arctic Archipelago). Possibly not as sea-ice concentration but as ice / no-ice (edge). Regional analysis Trend analysis, global monitoring Limit for trend analysis, evaluation of global GCM simulations						
			B	5							
			T	25							
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution	day		G	<1	SIC vary on a sub-daily time scale (opening/closing of leads) Ocean and Atmosphere reanalyses, daily monitoring of the sea-ice cover						
			B	1							
			T	7							
Timeliness	day		G	30	Operational monitoring with climate indicators, update of reanalyses Update of monthly climate indicators						
			B	1-2							
			T	7							
Required Measurement Uncertainty (2-sigma)	% SIC		G	30							
			B	5							
			T	10							
Stability	% /dec		G	5							
			B								
			T								
Standards and References						<ul style="list-style-type: none"> <li>Lavergne and Kern, et al. (2022). A New Structure for the Sea Ice Essential Climate Variables of the Global Climate Observing System, BAMS, DOI 10.1175/BAMS-D-21-0227.1.</li> <li>Ono, J., H. Tatebe, and Y. Komuro, 2019: Mechanisms for and Predictability of a Drastic Reduction in the Arctic Sea Ice: APPOSITE Data with Climate Model MIROC. J. Climate, 32, 1361–1380, <a href="https://doi.org/10.1175/JCLI-D-18-0195.1">https://doi.org/10.1175/JCLI-D-18-0195.1</a>.</li> </ul>					

#### 4.10.2 ECV Product: Sea ice thickness

Name						Sea ice thickness					
Definition		The vertical distance between sea ice surface and sea ice underside of the ice-covered fraction of an area.									
Unit		m									
Note		Sea-ice thickness is together with the sea-ice area derived from the sea-ice concentration the key ingredient to compute the sea-ice volume and mass. Long-term sea-ice volume and mass changes are considered as the integral response of climate change exerted on the polar regions.									
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	1	Required to resolve small scale impacts of deformation events on sea-ice thickness distribution for more accurate estimation of dynamics on mass balance  Enables to resolve thickness distribution approaching floe scale for improved ice mass flux  Needed to obtain enhanced ice-type specific ice thickness information and more accurate estimates of ice production.						
			B	25 distribution 25 mean & median	Required for the analysis of regional sea-ice thickness distributions Needed to further develop and improve GCMs and to improve regional climate analyses Needed to refine hemispheric trend analyses and to analyze basin-wide / regional sea-ice thickness and mass trends Required for the evaluation of the next generation of CMIP6 GCMs						
			T	50	Minimum useful horizontal resolution to compute hemispheric trends in sea-ice thickness and mass and to evaluate GCMs / CMIP6						
Vertical Resolution			G								
			B								
			T								
Temporal Resolution	day		G	daily year-round	To resolve ice production in polynyas and during early freeze-up To resolve the impact of dynamic processes on the sea-ice thickness distribution To resolve snow-ice formation						
			B	weekly year-round monthly year-round	To better monitor the impact of longer-lasting weather conditions on sea-ice formation and melt.  To better monitor the full seasonal cycle of sea-ice thickness						
			T	monthly wintertime	Minimum temporal resolution required to adequately monitor the winter-time sea-ice thickness and mass increase						
Timeliness	day days		G	1	Operational monitoring with climate indicators, update of reanalyses						
			B	7	Update of monthly climate indicators						
			T	30							
Required Measurement Uncertainty (2-sigma)	% SIC m		G	0.05	To improve monitoring of thin ice areas and associated heat fluxes To enhance sea-ice production estimation To monitor diurnal changes in sea-ice thickness during growth and melt						
			B	0.1	To monitor regional- and large-scale sea-ice thickness changes in the Arctic towards the end of the growing season and in the Antarctic.						
			T	0.25	Minimum useful uncertainty to be able to monitor basin-wide sea-ice thickness changes at monthly scale.						
Stability	% /dec		G								
			B								
			T								



**Standards  
and  
References**

- Lavergne and Kern, et al. (2022). A New Structure for the Sea Ice Essential Climate Variables of the Global Climate Observing System, BAMS, DOI 10.1175/BAMS-D-21-0227.1.

### 4.10.3 ECV Product: Sea ice drift

Name		Sea ice drift			
Definition		Rate of movement of sea ice due to winds, currents or other forces.			
Unit		km/day			
Note		1) Sea Ice drift is a 2D vector, expressed with two components along two orthogonal directions. 2) The uncertainty requirements below are for both components (not the total velocity). 3) The uncertainty requirements below are for a reference displacement period of 24 hours.			
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	1	Near-coast applications (e.g. Canadian Arctic Archipelago).
			B	5 25	Regional analysis, deformations, volume fluxes through narrow gates. Trend analysis, sea-ice tracking, volume fluxes
			T	50	Limit for trend analysis, evaluation of global GCM simulations
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	day		G	<1	Sea-ice motion can change very rapidly with winds or internal forces
			B	1 7	
			T	30	Large-scale circulation patterns and trends
Timeliness	day		G	1-2	Update of monthly climate indicators
			B	7	
			T	30	
Required Measurement Uncertainty (2-sigma)	km/day	see Note	G	0.25	Requires high-resolution imaging (e.g. SAR). For deriving deformation.
			B	3	
			T	10	
Stability	% /dec		G		
			B		
			T		
Standards and References	<ul style="list-style-type: none"> <li>Lavergne and Kern, et al. (2022). A New Structure for the Sea Ice Essential Climate Variables of the Global Climate Observing System, BAMS, DOI 10.1175/BAMS-D-21-0227.1.</li> <li>Dierking, W., et al., Estimating statistical errors in retrievals of ice velocity and deformation parameters from satellite images and buoy arrays, The Cryosphere, 14(9), 2999-3016, 2020, <a href="https://doi.org/10.5194/tc-14-2999-2020">https://doi.org/10.5194/tc-14-2999-2020</a></li> </ul>				

#### 4.10.4 ECV Product: Sea ice age

<b>Name</b>	Sea ice age
<b>Definition</b>	The age of an ice parcel is the time since its formation or since the last significant (e.g. summer) melt.
<b>Unit</b>	days
<b>Note</b>	<p>An ice parcel formed during the freezing season is in its first year of existence and can be defined as first-year ice, its age is less than 1 year. When it survives the first exposure to significant melting (e.g. summer season) it becomes second-year ice (its age is between 1 and 2 years). This continues for each summer melt season the ice parcel survives. In other words, the age of an ice parcel is rounded up to the nearest integer year with each exposure to significant melting (typically the summer melt season).</p> <p>While in the Arctic, it has been common practice to use the date of the overall summer minimum extent for the reclassification of the sea ice, there are no well accepted definitions for the Southern Ocean and region-specific dates might be needed. Here we do not define any specific details what the definition of the significant melt is.</p> <p>The reclassification of sea ice into an older ice category at significant melt aims at linking the sea-ice age information to the physical properties of the ice, including its air bubbles content, density, salinity, surface roughness, etc...All these physical properties change drastically through melting and especially during the first summer melt.</p> <p>Sea ice age can be reported as the representative/dominating age in an area or as the distribution of ages within an area. Sea ice age can be computed with different approaches. Traditionally, sea-ice age has been derived from either Lagrangian tracking techniques and presented as areas with year classes (age = 1, 2, 3, etc.) or from analysis of microwave emissivity and backscattering and reported as age categories (e.g. first-year ice, second year ice, multiyear ice). The latter retrieval method often refers to the product as sea-ice type. Age concentration products exist that report some distribution of age within grid cells.</p>

Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	1	Needed to resolve spatial differences in age when refreezing occurs between larger ice floes and plates, or in divergent icefields. Will capture details in the Canadian Archipelago. Needed to optimally resolve the age of narrow land-fast ice areas fringing Antarctica.
			B	5	Needed for better capturing regions dominated by broken old ice (like the Beaufort Gyre), and elongated filaments of certain age classes. Needed to resolve the age of larger-scale land-fast ice areas in Antarctica important for buttressing ice shelves. Reasonable capability in Canadian Archipelago, except for narrower straits. Regional analysis.
				25	General mapping of ice classes, used for climate monitoring e.g. trend analysis, climate index of old ice. Also, used as background information for ice thickness retrieval. Lack of resolution for smaller areas, such as in the Canadian Archipelago.
			T	50	Limit for trend analysis
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	days		G	<1	
			B	1	The edges between ice classes can move a lot during a day however the areal coverage of the >1year classes is assumed not to have large daily variability.
				7	
			T	30	
Timeliness	days		G	1-2	Operational monitoring with climate indicators
			B	7	
			T	30	Useful for input into monthly altimeter-based sea ice thickness estimates.
Required Measurement Uncertainty (2-sigma)	days		G	7	Age information as "time since its formation or since the last significant (e.g. summer) melt". We do report the age of the ice within the on-going freezing season.
			B	182	Age as year classes (1,2,3,...). Requirement on accuracy is 182 days (half a year) because we do not report the age of the ice within the on-going freezing season.
			T	> 1 year	As a minimum, a meaningful sea-ice age product should separate ice into seasonal ice and perennial ice, with a probability of correct classification of 70%. The dominating ice

					class is reported.
Stability	days		G		
			B		
			T		
Standards and References	<ul style="list-style-type: none"> <li>Lavergne and Kern, et al. (2022). A New Structure for the Sea Ice Essential Climate Variables of the Global Climate Observing System, BAMS, DOI 10.1175/BAMS-D-21-0227.1.</li> </ul>				

#### 4.10.5 ECV Product: Sea ice temperature

Name						Sea Ice Surface Temperature (IST)					
Definition						The surface temperature of sea ice or snow on sea ice, either a calibrated radiometric or thermometric in situ measurement.					
Unit						Kelvin (K)					
Note						The IST requirements below are based on several requirement/recommendation documents from relevant communities and institutions, e.g. WMO, GCOS, GMES, Copernicus/CMEMS, ESA CCI, NOAA, and others. Requirements for IST range widely in both in values and metric and the given values are based on these documents and expert judgments from the OSISAF High Latitude team. Uncertainty requirements are valid for automatically cloud screened day and night time IST data compared with surface temperature reference data of high quality, e.g. radiometric in situ observations.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	1	GCOS, GMES, Copernicus/CMEMS						
			B	5	GCOS, GMES, Copernicus/CMEMS						
			T	10							
Vertical Resolution	N/A		G	50	WMO						
			B	Skin							
			T	Skin							
Temporal Resolution	days		G	3 hours	to capture diurnal cycle, GCOS, Copernicus/CMEMS						
			B	1	GCOS, Copernicus/CMEMS						
			T	7	Can allow full coverage (cloud cover)						
Timeliness	days		G	1-2							
			B	7							
			T	30							
Required Measurement Uncertainty (2-sigma)	K		G	1.0	Copernicus/CMEMS, GMES, EUMETSAT/OSISAF, Dybkjær et al., 2019						
			B	3.0	Copernicus/CMEMS, GMES, EUMETSAT/OSISAF, Dybkjær et al., 2019						
			T	6.0	Copernicus/CMEMS, GMES, EUMETSAT/OSISAF, Dybkjær et al., 2019						
Stability			G	0.1	As defined in the GCOS LST ECV requirements						
			B	0.2							
			T	0.3	As defined in the GCOS LST ECV requirements						
Standards and References	<ul style="list-style-type: none"> <li>Lavergne and Kern, et al. (2022). A New Structure for the Sea Ice Essential Climate Variables of the Global Climate Observing System, BAMS, DOI 10.1175/BAMS-D-21-0227.1.</li> <li>CLiC (2012) Observational needs for sea ice models - Short note. Discussion note from CLiC Arctic Sea Ice Working Group, <a href="http://www.climate-cryosphere.org/about">http://www.climate-cryosphere.org/about</a>, 2012.</li> <li>CMEMS (2016) Bertino, L., L.A. Breivik, F. Dinesen, Y. Faugere, G. Garric, B. Hackett, J. A. Johannessen, T. Lavergne, P.-Y. LeTraon, L.T. Pedersen, P. Rampal, S. Sandven &amp; H. Shyberg. Position paper Polar and snow cover applications User Requirements Workshop Brussels, Copernicus Marine Environment Monitoring Service, Mercator Ocean.</li> <li>CMEMS (2017) CMEMS requirements for the evolution of the Copernicus Satellite Component. Copernicus Marine Environment Monitoring Service, Mercator Ocean and CMEMS partners.</li> <li>CMEMS (2020) CMEMS Dashboard Upstream Satellite Data Requirements, V10.0 March 2020 (spreadsheet)</li> <li>Copernicus (2018a) Duchossois, G., P. Strobl, V. Toumazou (Eds.) User Requirements for a Copernicus Polar Mission Phase 1 Report - User Requirements and Priorities. JRC Technical Report, doi:10.2760/22832, 2018.</li> <li>Copernicus. (2018b) Duchossois, G., P. Strobl, V. Toumazou (Eds.) User Requirements for a Copernicus Polar Mission Phase 2 Report - High-level mission requirements. JRC Technical Report, doi:10.2760/44170, 2018.</li> <li>Dybkjær, G., R. Tonboe, M. Winstrup and J. L. Høyer (2019) Review of state-of-the-art methods and algorithms for Ice Surface Temperature retrieval algorithms - Including consolidate and refine output product requirements and software specification, Product requirement and baseline document, version 2.3. EUMETSAT document Reference Number: EUM/OPS-COPER/19/1065840.</li> <li>GCOS (2016) The Global Observing System for Climate: Implementation Needs (World Meteorological Organization, GCOS-200).</li> <li>OSI SAF CDOP 3 (2018) Product Requirement Document, <a href="http://www.osi-saf.org/sites/default/files/dynamic/public_doc/osisaf_cdop3_gen_prd_1.4.pdf">http://www.osi-saf.org/sites/default/files/dynamic/public_doc/osisaf_cdop3_gen_prd_1.4.pdf</a>, Version: 1.4, 2018</li> </ul>										

#### 4.10.6 ECV Product: Sea ice surface albedo

Name						Sea ice surface albedo					
Definition						Broadband snow or ice surface albedo					
Unit						1					
Note						<p>Albedo is a measure of how much solar radiation incident at a surface of known area is reflected back; it is the ratio between incoming and outgoing surface short-wave radiation. The value range is 0 to 1. The surface albedo of sea ice covers almost the entire range with very thin ice such as dark nilas having an albedo of ~ 0.1 and sea ice with a fresh snow cover having an albedo of ~0.9. The albedo of bare (snow-free) sea ice depends strongly on sea-ice age. Predominantly in the Arctic, during summer, melt water forms complex patterns of melt ponds on top of the sea ice that reduce the albedo considerably - depending on areal fraction and depth of the ponds and on ice age. Thus, not only the surface albedo, but also its partition into surface types (openings in the sea ice cover, melt ponds, bare ice, snow, etc...) is critical to observe. Through its relation to surface melt processes, albedo observations are key to improving the satellite retrieval of other sea-ice variables, such as sea-ice concentration. Albedo is the key parameter describing the amount of solar energy available for ice melt and in-ice and under-ice primary production.</p> <p>Both the fact that the sea ice drifts and the difficulty to obtain adequate in-situ observations for ground truthing and evaluation of sea ice surface albedo climate data records determine that ECV requirements for sea-ice albedo differ from those of the terrestrial albedo.</p>					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	1	Needed for mapping of larger flooded ice areas in the Arctic during summer (e.g. in river estuaries, or fjords) Improved mapping of spring / summer melt progress in the Arctic as a function of ice age.						
			B	5	Needed to reliably monitor albedo evolution of larger thin ice areas associated with polynyas. Needed to monitor albedo evolution in narrow passages such as the Canadian Archipelago or around the Antarctic Peninsula						
			T	10	Needed to discriminate adequately between the albedo of ice of different age during melt and re-freeze in the Arctic. Needed to reliably detect surface melt / refreeze event-induced changes in snow surface albedo in the Antarctic						
Vertical Resolution	N/A		G	50	Minimum horizontal resolution to derive basin-wide trends in albedo and solar energy input						
			B								
			T								
Temporal Resolution	days		G		Required for an optimal quantification of surface albedo (and hence solar energy input) under highly variable cloud / surface illumination (changes surface topography) / surface conditions (fresh snow and pond drainage change surface albedo at ~ hourly scale)						
			B	3 hours							
			T	1							
Timeliness	days		G	7	Minimum temporal resolution required to derive basin-scale changes in seasonal surface available solar radiation input, melt onset, and commence of freeze-up as well as to estimate onset of under-ice primary production.						
			B	1-2							
			T	7							
Required Measurement Uncertainty (2-sigma)			G	30	Required to discriminate between new ice and open water and to detect submerged ice Needed to accurately observe sub-grid scale changes in ice surface conditions						
			B	0.01							
			T	0.05							
Stability	1/decade		G	0.1	Minimum measurement uncertainty to discriminate between ice / no ice or cold snow-covered / bare ice or to identify melt ponds						
			B								
			T								
Standards and	<ul style="list-style-type: none"> <li>Lavergne and Kern, et al. (2022). A New Structure for the Sea Ice Essential Climate Variables of the Global Climate Observing System, BAMS, DOI 10.1175/BAMS-D-21-0227.1.</li> </ul>										

References

- Perovich, D. K., et al., Anatomy of a late spring snowfall on sea ice, *Geophys. Res. Lett.*, 44(6), 2802-2809, 2017, <https://doi.org/10.1002/2016GL071470>
- Ardyna, M. and K. R. Arrigo, Phytoplankton dynamics in a changing Arctic Ocean, *Nat. Climate Change*, 10(10), 892-903, 2020, <https://doi.org/10.1038/s41558-020-0905-y>

#### 4.10.7 ECV Product: Snow depth on sea ice

Name						Snow depth on sea ice					
Definition						The vertical extent of the snow cover on top of the sea ice					
Unit						m					
Note						<p>Snow has a heat conductivity which is an order of magnitude smaller than that of sea ice. It is hence very efficient at isolating sea ice from the atmosphere already at a depth of a few centimeters. Snow reduces the ocean-atmosphere heat flux. Thick snow retards winter-time ice growth and summer-time ice melt onset. Snow therefore has a profound impact on the overall heat and sea-ice mass budget of the polar oceans.</p> <p>Snow has the highest short-wave albedo of the snow-sea ice-system. Snow-covered sea ice can reflect about 25% more solar radiation than any kind of bare sea ice. Snowfall during melt-onset can delay sea-ice melt for several days to a few weeks due to the surface albedo change imposed.</p> <p>Snow is a critically required parameter for sea-ice thickness retrieval using altimetry.</p> <p>Snow depth on sea ice has been retrieved using multi-frequency satellite microwave radiometer observations for decades. While the retrieval is mature and accurate over undeformed seasonal sea ice during winter conditions, deformation, melt conditions and multiyear ice pose challenges. To solve these is currently explored using innovative combinations of satellite microwave radiometer observations using even more frequencies than so far with radar and laser altimeter observations, in situ observations from buoys, airborne surveys and specifically developed snow models informed with meteorological data from numerical modeling.</p>					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	1	Minimum horizontal resolution to derive basin-wide trends  Minimum spatial resolution to support sea-ice thickness retrieval from altimetry						
			B	25 distribution							
			T	50							
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution			G	daily year-round	Needed for highly accurate year-round daily sea-ice thickness retrieval using satellite altimetry  Required to define begin and end of spring snow melt on sea ice  Needed to improve estimates of sea-ice melt progress or slow down  Would enable estimation of the amount of snow-to-ice conversion related to flooding - refreeze events						
			B	weekly year-round	Needed for year-round sea-ice thickness retrieval using satellite altimetry at weekly time scale  Required to enhance evaluation of ocean-atmosphere heat flux estimates during the shoulder seasons and studies about sea-ice melt and freeze onset						
			T	monthly year-round	Required for year-round sea-ice thickness retrieval using satellite altimetry						
Timeliness	days		G	monthly, wintertime	Minimum temporal resolution to support sea-ice thickness retrieval using satellite altimetry						
			B	1-2							
			T	7							
Required Measurement Uncertainty (2-sigma)	m		G	30							
			B	0.01							
			T	0.05							
Stability	m/decade		G	0.1	Minimum requirement to ensure a sea-ice thickness retrieval uncertainty < 0.5 m and < 0.8 m using radar and laser altimetry, respectively.						
			B								
			T								
Standards and	<ul style="list-style-type: none"> <li>Lavergne and Kern, et al. (2022). A New Structure for the Sea Ice Essential Climate</li> </ul>										



References

- Variables of the Global Climate Observing System, BAMS, DOI 10.1175/BAMS-D-21-0227.1.
- Kwok, R., and G. F. Cunningham, ICESat over Arctic sea ice: Estimation of snow depth and ice thickness, *J. Geophys. Res.*, 113, C08010, 2008, <https://doi.org/10.1029/2008JC004753>
  - Giles, K. A., et al., Combined airborne laser and radar altimeter measurements over the Fram Strait in May 2002, *Rem. Sens. Environ.*, 111(2-3), 182-194, 2007, <https://doi.org/10.1016/j.rse.2007.02.037>

## 5. BIOGEOCHEMISTRY

### 5.1 Oxygen

#### 5.1.1 ECV Product: Dissolved oxygen concentration

<b>Name</b>	Dissolved oxygen concentration				
<b>Definition</b>	Concentration of dissolved oxygen (O <sub>2</sub> ) in the water column				
<b>Unit</b>	μmol kg <sup>-1</sup>				
<b>Note</b>	This EOV/ECV is a measurement of sub-surface dissolved oxygen (O <sub>2</sub> ) concentration in the ocean, expressed in units of μmol kg <sup>-1</sup> . Data on dissolved oxygen is obtained by both discrete (chemical analysis) and continuous (sensor measurements) sampling performed on a number of observing platforms (ship-based, fixed-point, autonomous).				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	300 Coastal: 1-100	For global coverage, spatial resolution refers to distance between transects, not between sampling stations.
			B		
			T	2000 Coastal: 300	
<b>Vertical Resolution</b>			G		
			B		
			T		
<b>Temporal Resolution</b>			G	Monthly	
			B		
			T	decadal	
<b>Timeliness</b>	Month		G	6	
			B		
			T	12	
<b>Required Measurement Uncertainty (2-sigma)</b>	μmol kg <sup>-1</sup>		G	0.5	
			B		
			T	2	
<b>Stability</b>			G		
			B		
			T		
<b>Standards and References</b>	Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOV Specification Sheet for details and references ( <a href="http://www.gooscean.org/eov">www.gooscean.org/eov</a> ).				

## 5.2 Nutrients

### 5.2.1 ECV Product: Silicate

Name		Silicate			
Definition		Concentration of Si(OH) <sub>4</sub> in the water column			
Unit		µmol kg <sup>-1</sup>			
Note		The availability of nutrients in seawater is estimated from measurements of concentration of inorganic macronutrients: nitrate (NO <sub>3</sub> ), phosphate (PO <sub>4</sub> ), silicic acid (Si(OH) <sub>4</sub> ), ammonium (NH <sub>4</sub> ), and nitrite (NO <sub>2</sub> ), expressed in µmol kg <sup>-1</sup> of seawater. Nutrients ECV products are primarily obtained from discrete sample measurements using analytical chemical methods (colorimetric reactions) but nitrate concentration is also measured by sensors using the ultraviolet absorption method. Linear combination of nitrate and phosphate, defined as N*, and the difference between silicic acid and nitrate concentrations, Si*, provide estimates of nutrient supply/removal relative to global Redfield stoichiometry and are widely used for mapping and detecting trends in global nutrient cycling.			
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	1000 Coastal: 0.1-100	
			T	2000 Coastal: 100	
Vertical Resolution			G		
			T		
Temporal Resolution			G	seasonal  Coastal: monthly	
			T	decadal	
Timeliness	month		G	6	
			T	12	
Required Measurement Uncertainty (2-sigma)	%		G	1	
			T	3	
Stability					
Standards and References	Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOV Specification Sheet for details and references ( <a href="http://www.gooscean.org/eov">www.gooscean.org/eov</a> ).				

## 5.2.2 ECV Product: Phosphate

Name						Phosphate					
Definition						Concentration of PO <sub>4</sub> in the water column					
Unit						μmol kg <sup>-1</sup>					
Note						The availability of nutrients in seawater is estimated from measurements of concentration of inorganic macronutrients: nitrate (NO <sub>3</sub> ), phosphate (PO <sub>4</sub> ), silicic acid (Si(OH) <sub>4</sub> ), ammonium (NH <sub>4</sub> ), and nitrite (NO <sub>2</sub> ), expressed in μmol kg <sup>-1</sup> of seawater. Nutrients ECV products are primarily obtained from discrete sample measurements using analytical chemical methods (colorimetric reactions) but nitrate concentration is also measured by sensors using the ultraviolet absorption method. Linear combination of nitrate and phosphate, defined as N*, and the difference between silicic acid and nitrate concentrations, Si*, provide estimates of nutrient supply/removal relative to global Redfield stoichiometry and are widely used for mapping and detecting trends in global nutrient cycling.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	1000							
			B	Coastal: 0.1-100							
			T	2000							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution			G	seasonal							
			B	Coastal: monthly							
			T	decadal							
Timeliness	month		G	6							
			B								
			T	12							
Required Measurement Uncertainty (2-sigma)	%		G	1							
			B								
			T	3							
Stability											
Standards and References	Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOVS Specification Sheet for details and references ( <a href="http://www.goosocean.org/eov">www.goosocean.org/eov</a> ).										

### 5.2.3 ECV Product: Nitrate

Name						Nitrate					
Definition						Concentration of NO <sub>3</sub> in the water column					
Unit						μmol kg <sup>-1</sup>					
Note						The availability of nutrients in seawater is estimated from measurements of concentration of inorganic macronutrients: nitrate (NO <sub>3</sub> ), phosphate (PO <sub>4</sub> ), silicic acid (Si(OH) <sub>4</sub> ), ammonium (NH <sub>4</sub> ), and nitrite (NO <sub>2</sub> ), expressed in μmol kg <sup>-1</sup> of seawater. Nutrients ECV products are primarily obtained from discrete sample measurements using analytical chemical methods (colorimetric reactions) but nitrate concentration is also measured by sensors using the ultraviolet absorption method. Linear combination of nitrate and phosphate, defined as N*, and the difference between silicic acid and nitrate concentrations, Si*, provide estimates of nutrient supply/removal relative to global Redfield stoichiometry and are widely used for mapping and detecting trends in global nutrient cycling.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	1000							
			B	Coastal: 0.1-100							
			T	2000							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution			G	seasonal							
			B	Coastal: monthly							
			T	decadal							
Timeliness	month		G	6							
			B								
			T	12							
Required Measurement Uncertainty (2-sigma)	%		G	1							
			B								
			T	3							
Stability											
Standards and References	Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOVS Specification Sheet for details and references ( <a href="http://www.gooscean.org/eov">www.gooscean.org/eov</a> ).										

## 5.3 Ocean inorganic carbon

### 5.3.1 ECV Product: Total alkalinity (TA)

Name	Total alkalinity (TA)				
Definition	total concentration of alkaline substances				
Unit	$\mu\text{mol kg}^{-1}$				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	1000	
			B	Coastal: 100	
			T	2000	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution			G	seasonal	
			B		
			T	decadal	
Timeliness	Months		G	6	
			B		
			T	12	
Required Measurement Uncertainty (2-sigma)	$\mu\text{mol kg}^{-1}$		G	2	
			B		
			T	2	
Stability			G		
			B		
			T		
Standards and References	<p>Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOVS Specification Sheet for details and references (<a href="http://www.goosocean.org/eov">www.goosocean.org/eov</a>).</p> <p>Additional requirements based on the Global Ocean Data Assimilation Project (GLODAP; <a href="http://www.glodap.info">www.glodap.info</a>); for pH based on the Global Ocean Acidification Observing Network (GOA-ON) Implementation Strategy (<a href="http://goa-on.org/about/strategy.php">http://goa-on.org/about/strategy.php</a>); for pCO<sub>2</sub> from the Surface Ocean CO<sub>2</sub> Atlas (SOCAT; <a href="http://www.socat.info">www.socat.info</a>).</p>				

### 5.3.2 Dissolved inorganic carbon (DIC)

Name						Dissolved inorganic carbon (DIC)					
Definition						Sum of dissolved inorganic carbon species (CO <sub>2</sub> , HCO <sup>-</sup> , CO <sub>3</sub> <sup>2-</sup> ) in water					
Unit						μmol kg <sup>-1</sup>					
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	1000 Coastal: 100							
			B								
			T	2000 Coastal: 1000							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution			G	seasonal							
			B								
			T	decadal							
Timeliness	Months		G	6							
			B								
			T	12							
Required Measurement Uncertainty (2-sigma)	μmol kg <sup>-1</sup>		G	2							
			B								
			T	2							
Stability											
Standards and References	Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOVS Specification Sheet for details and references ( <a href="http://www.goosocean.org/eov">www.goosocean.org/eov</a> ).										
	Additional requirements based on the Global Ocean Data Assimilation Project (GLODAP; <a href="http://www.glodap.info">www.glodap.info</a> ); for pH based on the Global Ocean Acidification Observing Network (GOA-ON) Implementation Strategy ( <a href="http://goa-on.org/about/strategy.php">http://goa-on.org/about/strategy.php</a> ); for pCO <sub>2</sub> from the Surface Ocean CO <sub>2</sub> Atlas (SOCAT; <a href="http://www.socat.info">www.socat.info</a> ).										

### 5.3.3 ECV Product: pCO<sub>2</sub>

Name						pCO <sub>2</sub>					
Definition						surface ocean partial pressure of CO <sub>2</sub>					
Unit						µatm					
Note											
						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	100							
			B								
			T	1000 Coastal: <1000							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution			G	monthly							
			B								
			T	decadal							
Timeliness	Months		G	6							
			B								
			T	12							
Required Measurement Uncertainty (2-sigma)	µatm		G	2							
			B								
			T	2							
Stability			G								
			B								
			T								
Standards and References	<p>Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOVS Specification Sheet for details and references (<a href="http://www.goosiocean.org/eov">www.goosiocean.org/eov</a>).</p> <p>Additional requirements based on the Global Ocean Data Assimilation Project (GLODAP; <a href="http://www.glodap.info">www.glodap.info</a>); for pH based on the Global Ocean Acidification Observing Network (GOA-ON) Implementation Strategy (<a href="http://goa-on.org/about/strategy.php">http://goa-on.org/about/strategy.php</a>); for p CO<sub>2</sub> from the Surface Ocean CO<sub>2</sub> Atlas (SOCAT; <a href="http://www.socat.info">www.socat.info</a>).</p>										



## 5.4 Transient tracers

### 5.4.1 ECV Product: $^{14}\text{C}$

Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	2000: Regional 200: Deep water formation areas	
			B		
			T	2000	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	year		G	10: Regional 2: Deep water formation areas	
			B		
			T	10	
Timeliness	year		G	1	
			B		
			T	2	
Required Measurement Uncertainty (2-sigma)	‰		G	0.4	
			B		
			T		
Stability	year		G	10: Regional 1: Deep water formation areas	
			B		
			T	10	
Standards and References	Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOVS Specification Sheet for details and references ( <a href="http://www.goosiocean.org/eov">www.goosiocean.org/eov</a> ).				

5.4.2 ECV Product: SF<sub>6</sub>

Name		SF <sub>6</sub>			
Definition		Concentration of SF <sub>6</sub> gas in the water column			
Unit		fmol kg <sup>-1</sup>			
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	2000: Regional 200: Deep water formation areas	
			B		
			T	2000	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	year		G	10: Regional 2: Deep water formation areas	
			B		
			T	10	
Timeliness	year		G	1	
			B		
			T	2	
Required Measurement Uncertainty (2-sigma)	‰		G	0.4	
			B		
			T		
Stability	year		G	10: Regional 1: Deep water formation areas	
			B		
			T	10	
Standards and References	Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOVS Specification Sheet for details and references ( <a href="http://www.goosocean.org/eov">www.goosocean.org/eov</a> ).				

## 5.4.3 ECV Product: CFC-11

Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	2000: Regional 200: Deep water formation areas	
			B		
			T	2000	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	year		G	10: Regional 2: Deep water formation areas	
			B		
			T	10	
Timeliness	month		G	6	
			B		
			T	6	
Required Measurement Uncertainty (2-sigma)	‰		G	1	
			B		
			T		
Stability	year		G	10: Regional 1: Deep water formation areas	
			B		
			T	10	
Standards and References	Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOVS Specification Sheet for details and references ( <a href="http://www.gooscean.org/eov">www.gooscean.org/eov</a> ).				

## 5.4.4 ECV Product: CFC-12

Name						CFC-12
Definition						Concentration of CFC-12 gas in the water column
Unit						pmol kg <sup>-1</sup>
Note						
Requirements						
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards	
Horizontal Resolution	km		G	2000: Regional 200: Deep water formation areas		
			B			
			T	2000		
Vertical Resolution			G			
			B			
			T			
Temporal Resolution	year		G	10: Regional 2: Deep water formation areas		
			B			
			T	10		
Timeliness	month		G	6		
			B			
			T	6		
Required Measurement Uncertainty (2-sigma)	‰		G	1		
			B			
			T			
Stability	year		G	10: Regional 1: Deep water formation areas		
			B			
			T	10		
Standards and References	Requirements based on characteristic scales and magnitude of signal of phenomena to observe. See the EOVS Specification Sheet for details and references ( <a href="http://www.goosiocean.org/eov">www.goosiocean.org/eov</a> ).					

## 5.5 Ocean nitrous oxide N<sub>2</sub>O

### 5.5.1 ECV Product: Nitrous oxide N<sub>2</sub>O

Name	Snow-water equivalent				
Definition	Amount of N <sub>2</sub> O produced per area per year				
Unit	μmol m <sup>-2</sup> yr <sup>-1</sup>				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	<2000 Coastal: <50 0	
			B		
			T	2000	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution			G	Seasonal Coastal: weekly to monthly	
			B		
			T	Decadal	
Timeliness	years		G	1	
			B		
			T	2	
Required Measurement Uncertainty (2-sigma)			G	<1	
			B		
			T	5	
Stability	%		G		
			B		
			T		
Standards and References	Values based on the characteristic scales of the phenomena which are observed using N <sub>2</sub> O measurements. For more details and references see the Nitrous Oxide EOVS Specification Sheet ( <a href="http://www.gooscean.org/eov">www.gooscean.org/eov</a> ), publications from SCOR WG 143 ( <a href="https://scor-int.org/group/143/">https://scor-int.org/group/143/</a> ) and the GOOS Report No. 225 ( <a href="https://www.gooscean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=20428">https://www.gooscean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=20428</a> ).				

### 5.5.2 ECV Product: N<sub>2</sub>O air-sea flux

Name		Snow-water equivalent			
Definition		Concentration of N <sub>2</sub> O gas in the water column			
Unit		nmol kg <sup>-1</sup>			
Note		Nitrous oxide Nitrous oxide (N <sub>2</sub> O) is an atmospheric trace gas which is measured in the water column of all major ocean basins at concentrations spanning three orders of magnitude. The ocean is a major source (around 25%) of N <sub>2</sub> O gas to the atmosphere.			
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	<2000 Coastal: <500	
			B		
			T	2000	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution			G	Seasonal	
			B		
			T	Seasonal Coastal: weekly to monthly	
Timeliness	years		G	1	
			B		
			T	2	
Required Measurement Uncertainty (2-sigma)	%		G	<1	
			B		
			T	5	
Stability			G		
			B		
			T		
Standards and References	Values based on the characteristic scales of the phenomena which are observed using N <sub>2</sub> O measurements. For more details and references see the Nitrous Oxide EOVS Specification Sheet ( <a href="http://www.goosocean.org/eov">www.goosocean.org/eov</a> ), publications from SCOR WG 143 ( <a href="https://scor-int.org/group/143/">https://scor-int.org/group/143/</a> ) and the GOOS Report No. 225 ( <a href="https://www.goosocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=20428">https://www.goosocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=20428</a> ).				

## 5.6 Ocean colour

### 5.6.1 ECV Product: Water leaving radiance

<b>Name</b>	Water leaving radiance				
<b>Definition</b>	Amount of light emanating from within the ocean				
<b>Unit</b>	µg l-1				
<b>Note</b>	Ocean colour is the radiance emanating from the ocean normalized by the irradiance illuminating the ocean. Products derived from ocean colour remote sensing (OCRS) contain information on the ocean albedo and information on the constituents of the seawater, in particular, phytoplankton pigments such as chlorophyll-a.				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
Horizontal Resolution	km		G	4	
			B		
			T	4	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	day		G	1	
			B		
			T	7	
Timeliness			G		
			B		
			T		
Required Measurement Uncertainty (2-sigma)	%		G	30	
			B		
			T	30	
Stability	%		G	3	
			B		
			T	3	
<b>Standards and References</b>	For more details and references see the Ocean colour EOVS Specification Sheet ( <a href="http://www.gooscean.org/eov">www.gooscean.org/eov</a> ).				

## 5.6.2 ECV Product: Water leaving radiance

Name						Water leaving radiance					
Definition						Amount of light emanating from within the ocean					
Unit											
Note						Ocean colour is the radiance emanating from the ocean normalized by the irradiance illuminating the ocean. Products derived from ocean colour remote sensing (OCRS) contain information on the ocean albedo and information on the constituents of the seawater, in particular, phytoplankton pigments such as chlorophyll-a.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	4							
			B								
			T	4							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution	day		G	1							
			B								
			T	1							
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	%		G	5	Uncertainty specified for blue and green wavelengths.						
			B		Uncertainty specified for blue and green wavelengths.						
			T	5							
Stability	%		G	0.5							
			B								
			T	0.5							
Standards and References	For more details and references see the Ocean colour EOVS Specification Sheet ( <a href="http://www.goosiocean.org/eov">www.goosiocean.org/eov</a> ).										



## 6. BIOSPHERE

### 6.1 Plankton

#### 6.1.1 ECV Product: Zooplankton diversity

Name						Zooplankton diversity					
Definition		Number of species, functional traits, molecular biology groups (Operational Taxonomic Unit/OUT, other) per unit seawater volume or unit sea surface area, or unit benthos area									
Unit		[Number of Species per unit volume or area, [Number of traits per unit volume or area], [Number of molecular biology groups per unit volume or area]									
Note											
						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	100 offshore 0.1 nearshore							
			B	1 offshore 0.1 nearshore							
			T	2500 offshore 0.1 nearshore							
Vertical Resolution	m		G	10 nominal	Depends on method of collection: discrete samples, vertical imaging profiles, net tows (oblique vs open/closing), or continuous tow recorder/imaging						
			B	10 nominal							
			T	surface							
Temporal Resolution	month		G	1	Phenology of zooplankton is critical for food web dynamics, and recruitment success for whales, birds, turtles, fish, and invertebrate success						
			B	3							
			T	12							
Timeliness	year		G	1							
			B								
			T	2							
Required Measurement Uncertainty (2-sigma)	%, count, concentration, weight (biomass)		G		Depending on observation: Taxonomic unit, trait, molecular group, biomass (wet/dry weight, carbon, nitrogen, protein content)						
			B								
			T	5							
Stability			G								
			B								
			T								
Standards and References	See the Zooplankton EOVS Specification Sheet for more details and references ( <a href="https://www.goosoocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17509">https://www.goosoocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17509</a> )										

### 6.1.2 ECV Product: Zooplankton biomass

<b>Name</b>	Zooplankton biomass				
<b>Definition</b>	Weight of zooplankton by volume				
<b>Unit</b>	mg/l				
<b>Note</b>	can be dry weight or wet weight				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	100	
			B		
			T	2500	
<b>Vertical Resolution</b>	m		G	10	
			B		
			T	surface	
<b>Temporal Resolution</b>	month		G	1	
			B		
			T	12	
<b>Timeliness</b>	year		G	1	
			B		
			T	2	
<b>Required Measurement Uncertainty (2-sigma)</b>	%		G		
			B		
			T	5	
<b>Stability</b>			G		
			B		
			T		
<b>Standards and References</b>	See the Zooplankton EOVS Specification Sheet for more details and references ( <a href="https://www.gooscean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17509">https://www.gooscean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17509</a> )				

### 6.1.3 ECV Product: Phytoplankton diversity

Name						Phytoplankton diversity					
Definition						Number of species per unit sample, number and concentration of pigment types per unit sample					
Unit						Per unit volume or unit surface area					
Note						Phytoplankton are the foundation of near-surface food webs and the non-chemosynthetic support for deep ocean foodwebs through vertical fluxes of particulate organic matter. In addition to their biomass and diversity, measures of primary production are also important.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	100 offshore 0.1 nearshore							
			B	1 offshore 0.1 nearshore							
			T	2000 offshore 1 nearshore							
Vertical Resolution			G	10 nominal	Depends on method of collection: discrete samples, vertical imaging profiles, net tows (oblique vs open/closing), or continuous tow recorder/imaging						
			B	10 nominal							
			T	surface							
Temporal Resolution	monthly		G	weekly-monthly	Phenology of phytoplankton is critical for food web dynamics and recruitment success for whales, birds, turtles, fish, and invertebrate success						
			B	3							
			T	1							
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	%		G		Depending on observation: Taxonomic unit, trait, molecular group, biomass (wet/dry weight, carbon, nitrogen, protein content)						
			B								
			T	5							
Stability			G								
			B								
			T								
Standards and References	<ul style="list-style-type: none"> <li>Field methods foundational reference for operational oceanography: Strickland, J.D., &amp; Parsons, T.R. (1968). A practical handbook of seawater analysis. Fisheries Research Board of Canada. Bulletin 167. (plus numerous and more recent publications for specific methods)</li> <li>Remote sensing of phytoplankton links to the Ocean Colour EO/ECV</li> <li>See the EO/ECV Specification Sheet for more details and references (<a href="https://www.gooscean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17507">https://www.gooscean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17507</a>)</li> </ul>										

### 6.1.4 ECV Product: Chlorophyll-a concentration

<b>Name</b>	Chlorophyll-a concentration				
<b>Definition</b>	Concentration of chlorophyll-a pigment in the surface water				
<b>Unit</b>	µg l-1				
<b>Note</b>					
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	4	
			B		
			T		
<b>Vertical Resolution</b>			G		
			B		
			T		
<b>Temporal Resolution</b>			G	weekly	
			B		
			T	decadal	
<b>Timeliness</b>			G		
			B		
			T		
<b>Required Measurement Uncertainty (2-sigma)</b>	%		G	30	
			B		
			T	30	
<b>Stability</b>	%		G	3	
			B		
			T	3	
<b>Standards and References</b>	See the EOVS Specification Sheet for more details and references ( <a href="https://www.gooscean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17507">https://www.gooscean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17507</a> )				

### 6.1.5 ECV Product: Phytoplankton biomass

Name		Phytoplankton biomass			
Definition		Weight of phytoplankton by volume			
Unit		mg/m <sup>3</sup>			
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	100	
			B		
			T	2000	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution			G	Weekly-seasonal	
			B		
			T	decadal	
Timeliness			G		
			B		
			T		
Required Measurement Uncertainty (2-sigma)	%		G		
			B		
			T	5	
Stability			G		
			B		
			T		
Standards and References	<ul style="list-style-type: none"> <li>See the EOVS Specification Sheet for more details and references (<a href="https://www.goosiocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17507">https://www.goosiocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17507</a>)</li> </ul>				

## 6.2 Marine habitat properties

### 6.2.1 Mangrove cover and composition

Name	Mangrove cover and composition				
Definition					
Unit	Extent of mangroves and species types in coastal environments (percent or ha and number of species per area). Extent measured in quadrats (e.g. 10x10m), or by pixels (e.g. 30x30m)				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	m <sup>2</sup>	Pixel/point in space	G	30x30	
			B		
			T	50x50	
Vertical Resolution			G		
			B		
			T		
Temporal Resolution	Month	Point in time	G	12	
			B		
			T	12	
Timeliness	Month	Point in time	G	6	
			B		
			T	12	
Required Measurement Uncertainty (2-sigma)	Areal extent	Percent	G	10	
			B		
			T	20	
Stability	Percent cover		G	10	
			B		
			T	50	
Standards and References	<ul style="list-style-type: none"> <li>Requirements and approaches vary for field based and satellite mapping approaches. For in situ data collection for mangrove composition see <a href="https://www.daf.qld.gov.au/__data/assets/pdf_file/0006/63339/Data-collection-protocol.pdf">https://www.daf.qld.gov.au/__data/assets/pdf_file/0006/63339/Data-collection-protocol.pdf</a> and <a href="https://www.cifor.org/publications/pdf_files/WPapers/WP86CIFOR.pdf">https://www.cifor.org/publications/pdf_files/WPapers/WP86CIFOR.pdf</a></li> <li>See the EOVS Specification Sheet for more details and references (<a href="http://goosocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17514">http://goosocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17514</a>)</li> </ul>				

### 6.2.2 Seagrass cover (areal extent)

<b>Name</b>	<b>Seagrass cover (areal extent)</b>				
<b>Definition</b>	Areal extent of suitable physical habitat (shallow sediment shelf with adequate water quality) supporting seagrass.				
<b>Unit</b>	km <sup>2</sup>				
<b>Note</b>	Seagrass areal extent is typically estimated by remote sensing, including satellite, photography from aircraft, and for smaller areas by Unoccupied Aerial vehicle (UAV), i.e., drone. Various methods of image post-processing have been used to convert imagery to seagrass habitat extent.				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	m		G	30	Muller-Karger et al. 2018
			B		
			T	250	Muller-Karger et al. 2018
<b>Vertical Resolution</b>	NA		G		
			B		
			T		
<b>Temporal Resolution</b>	year		G	1 week	Muller-Karger et al. 2018
			B		
			T	1 year	
<b>Timeliness</b>			G		
			B		
			T		
<b>Required Measurement Uncertainty (2-sigma)</b>	%		G		
			B		
			T	10	Duarte 2002
<b>Stability</b>			G		
			B		
			T		
<b>Standards and References</b>	<ul style="list-style-type: none"> <li>Requirements based on characteristic scales and magnitude of signal of phenomena to observe.</li> <li>See the EOVS Specification Sheet for more details and references (<a href="http://goosocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17513">http://goosocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17513</a>)</li> </ul>				

### 6.2.3 Macroalgal canopy cover and composition

Name						Macroalgal canopy cover and composition					
Definition						Abundance of layered macroalgal stands in marine coastal environments					
Unit						percent or number of individuals/area					
Note						Percent cover measured within quadrats (e.g., 0.5 x 0.5 m) or transects (e.g., 50 x 5 m). For large macroalgae such as kelps, abundance can be measured as number of individuals per area.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m <sup>2</sup>	point in space	G	0.25							
			B	1							
			T	250							
Vertical Resolution	m	linear extent	G	1							
			B	5							
			T	10							
Temporal Resolution	Month	point in time	G	1							
			B	3							
			T	12							
Timeliness	Month	point in time	G	4							
			B	6							
			T	12							
Required Measurement Uncertainty (2-sigma)	Percent cover		G	10							
			B	20							
			T	30							
Stability	Percent cover		G	20							
			B	30							
			T	50							
Standards and References	<ul style="list-style-type: none"> <li>See the EOVS Specification Sheet for more details and references (<a href="http://goosocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17515">http://goosocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17515</a>)</li> </ul>										



### 6.2.4 Hard coral cover and composition

Name						Hard coral cover and composition					
Definition						Percent cover of hard coral. For composition, this is broken down by taxonomic or functional groups.					
Unit						%					
Note											
						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km		G	10-100	For resolution of climate impacts, down to 10 km would be ideal; but will require development of remote sensing tools that can distinguish coral cover						
			B								
			T	1000	Currently global coral data is analyzed at country levels (100s to 1000s of km)						
Vertical Resolution	m		G	10	for resolution of climate impacts, stratification in 10 m would be ideal						
			B								
			T	≈	single layer, global coral data is summarized in a single bin						
Temporal Resolution	Year		G	1	annual data ideal						
			B								
			T	5-10	data gaps results in 5-10 year gaps/bins for global analyses						
Timeliness	Year		G	0.25	Establishment of open access integrated regional datasets would allow sub-annual access to data						
			B	2							
			T	5	Current practice requires high-effort compilations						
Required Measurement Uncertainty (2-sigma)	%		G								
			B								
			T	5							
Stability			G								
			B								
			T								
Standards and References	<ul style="list-style-type: none"> <li>English, S., Wilkinson, C., and Baker, V. (1997). Survey Manual for Tropical Marine Resources. Townsville, Australia. Australian Institute of Marine Science.</li> <li>GCRMN (2018a). GCRMN Implementation and Governance Plan. International Coral Reef Initiative (ICRI).</li> <li>GCRMN (2018b). GCRMN Technical Note. International Coral Reef Initiative (ICRI).</li> <li>Obura DO, Aeby G, Amornthammarong N, Appeltans W, Bax N, Bishop J, Brainard RE, Chan S, Fletcher P, Gordon TAC, Gramer L, Gudka M, Halas J, Hendee J, Hodgson G, Huang D, Jankulak M, Jones A, Kimura T, Levy J, Miloslavich P, Chou LM, Muller-Karger F, Osuka K, Samoily M, Simpson SD, Tun K and Wongbusarakum S (2019) Coral Reef Monitoring, Reef Assessment Technologies, and Ecosystem-Based Management. Front. Mar. Sci. 6:580. doi: 10.3389/fmars.2019.00580</li> <li>See the EOVS Specification Sheet for more details and references (<a href="https://www.goosiocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17512">https://www.goosiocean.org/index.php?option=com_oe&amp;task=viewDocumentRecord&amp;docID=17512</a>)</li> </ul>										

## **A3. Terrestrial ECVs**

## 7. HYDROLOGY

### 7.1 Groundwater

#### 7.1.1 ECV Product: Groundwater Storage Change

Name						Groundwater Storage Change										
Definition		The volumetric loss or gain of groundwater between two times period														
Unit		km <sup>3</sup> /year or mm/year														
Note		Ground water storage change is monitored at large spatial scales by satellite gravimetry. To isolate groundwater storage change from the total mass variations observed by satellite gravimetry, all other mass changes in the Earth system need to be subtracted by complementary observations or models.														
Requirements						Requirements										
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards											
Horizontal Resolution	km	Length/width of area that can be resolved	G	≤ 100	depends on size of aquifer, hydrogeological characteristics, and type of application. 100 km is defined as a goal/target value by ref#1											
			B													
			T	200-300							horizontal resolution of GRACE water storage data, depending on product, signal strength, geographical location and time scale (ref #1, #2, #3)					
Vertical Resolution	N/A		G													
			B													
			T													
Temporal Resolution		time	G	Biweekly	Requirement for the analysis of the groundwater response to, e.g., recharge events or changes in (human) withdrawals											
			B	Monthly												
			T	Seasonal							Requirement for assessing, e.g., the climatology of groundwater storage variations and long-term variations / trends					
Timeliness		time	G	Near-real time	Requirement for risk management (droughts), short-term forecasts											
			B	monthly							Requirement for, e.g., seasonal forecasts					
			T	annually							Minimum requirement to assess long-term storage variations					
Required Measurement Uncertainty (2-sigma)	mm/yr	Change in water storage in water equivalents (volume per area) between two time periods	G	1	Goal value to allow for a much larger number of aquifers or river basins of smaller size to be monitored than for threshold value (ref #1), or for detecting more subtle rates of groundwater storage change. Depending on the time scale of application (e.g., for the assessment of monthly anomalies or long-term trends), the required measurement uncertainties may vary. It should be noted that the measurement uncertainty based on satellite gravimetry varies largely and in a non-linear way with spatial resolution, i.e., it is given as 0.05, 1, 5, 50 mm/year for 400, 200, 150, 100 km spatial resolution (ref #1). Additional uncertainty is added by isolating groundwater storage from total mass changes observed by satellite gravimetry.											
			B													
			T	10							Expert judgement, based on long-term groundwater trends as observed with GRACE for large aquifers (≥ 50000 km <sup>2</sup> ) (ref #2, #4), given that these observations already provided valuable information on the status of large aquifers. Depending on the time scale of application (e.g., for the assessment of monthly anomalies or long-term trends), the required measurement uncertainties may vary.					
Stability	mm/yr		G	1	Based on subtle expected long-term groundwater trends in large aquifers											
			B													
			T	10							Based on expected long-term groundwater trends as observed with GRACE for large aquifers (≥ 50000 km <sup>2</sup> ) (ref #2, #4)					
Standards and References	<ul style="list-style-type: none"> <li>#1 Pail, R., Bingham, R., Braitenberg, C., Dobslaw, H., Eicker, A., Güntner, A., Horwath, M., Ivins, E., Longuevergne, L., Panet, I., Wouters, B., and the IUGG Expert Panel (2015): Science and User Needs for Observing Global Mass Transport to Understand Global Change and to Benefit Society. Surveys in Geophysics, 36, 743-772, 10.1007/s10712-015-9348-9.</li> </ul>															

- #2 Frappart, F., and Ramillien, G. (2018): Monitoring Groundwater Storage Changes Using the Gravity Recovery and Climate Experiment (GRACE) Satellite Mission: A Review. *Remote Sensing*, 10, 10.3390/rs10060829.
- #3 Rodell, M., Famiglietti, J. S., Wiese, D. N., Reager, J. T., Beaulieu, H. K., Landerer, F. W., and Lo, M. H. (2018): Emerging trends in global freshwater availability, *Nature*, 557, 650+, 10.1038/s41586-018-0123-1.
- #4 Chen, J. L., Famiglietti, J. S., Scanlon, B. R., and Rodell, M. (2016): Groundwater Storage Changes: Present Status from GRACE Observations. *Surveys in Geophysics*, 37, 397-417, 10.1007/s10712-015-9332-4.

### 7.1.2 ECV Product: Groundwater Level

Name						Groundwater Level					
Definition		The level (depth or elevation) of the water table, the upper surface of the saturated portion of the soil or bedrock									
Unit		m									
Note		Groundwater levels are measured in monitoring wells. The measurements are expressed in m (below ground surface or above sea level, depending on the reference system).									
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution		Density of wells (number of wells/area)	G	Depends on hydrogeology	Expert judgment						
			B	Depends on hydrogeology	Expert judgment						
			T	Minimum of 1 well per 100 km <sup>2</sup>	This is the horizontal resolution recommended by the U.S. Geological Survey (USGS).						
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution		time	G	Biweekly	Expert judgment						
			B	Monthly	Expert judgment						
			T	Seasonal (wet/dry)	Expert judgment						
Timeliness		time	G	Real-time	Expert judgment. When resources are available, a real-time monitoring network with telemetry can be set up, allowing the public to get data immediately. When quality checks are performed, international experience shows that data can be released in 2 or 3 days.						
			B	Twice per year	Expert judgment. International experience shows that when missions have to be carry out to measure groundwater levels, half a year is an adequate time span to go over all locations, measure the levels, come back to the office, perform data quality tests and upload the final data in the online database to make it available to the public through official channels.						
			T	Annually	Timeliness is directly related to the use of technology to get the data (telemetry vs going to the field to collect the data).						
Required Measurement Uncertainty (2-sigma)			G	1 mm or less	Depending on the size and gradient of the aquifer, higher uncertainties may have a significant impact on the estimation of the water table. Also, there are other parameters that could have a higher impact on the uncertainty of the recording, as ill-defined vertical datums, pumping wells disrupting groundwater flow patterns, inadequate location of the well, inadequate length of screen setting, etc.						
			B								
			T								
Stability	cm	A stable trend can be defined as an average monthly change in groundwater levels that is less than a certain value (e.g. 10 cm), for a series of consecutive years (for example, 5, 10 or 20 years). A specific number and density of point data	G	10 cm	*For 5 years trend, 10 or more data points are required, and at least one reading per year for 4 years out of the 5. *For 10 years trend, 20 or more data points are required, and at least one reading from each consecutive two year period. *For 20 years trend, 40 or more data points are required, and at least one reading from each consecutive four year period.  This method is the one used by the Bureau of Meteorology (Australia), which is one of the several methods used around the world to estimate a stable trend in groundwater levels.						
			B								
			T		*It is important to notice that each country might have its own threshold value depending on how marked seasonal fluctuations are (depending on precipitation regimen and hydrogeology, among others)						

		are needed depending on the period to be considered:			
<b>Standards and References</b>					

## 7.2 Lakes

### 7.2.1 ECV Product: Lake Ice Cover (LIC)

<b>Name</b>	<b>Lake Ice Cover (LIC)</b>				
<b>Definition</b>	Area of lake covered by ice				
<b>Unit</b>	km <sup>2</sup>				
<b>Note</b>	<ul style="list-style-type: none"> <li>– Based on lake-wide satellite observations. In situ observations of ice cover can be temporally and spatially consistent, and therefore be useful for climate monitoring, but capture variations and trends in ice cover that are spatially limited (i.e. not lake-wide but rather representative of some limited area observable from lake shore).</li> <li>– Lake-wide ice phenology can be derived from LIC (freeze onset to complete freeze over (CFO) dates during the freeze-up period; melt onset to water clear of ice (WCI) dates during the break-up period; and ice cover duration derived from number of days between CFO and WCI dates over an ice year) (Duguay et al., 2015).</li> <li>– For lakes that do not form a complete ice cover every year or in some years (e.g. Laurentian Great Lakes), maximum ice cover extent (timestamped with date) is also a useful climate indicator that can be derived; similarly minimum ice extent can be derived for High Arctic lakes that do not completely lose their ice cover in summer.</li> </ul>				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	m		G	50	Smaller water bodies as well as due to increased availability of synthetic aperture radar (SAR) and optical data at resolutions ≤ 50 m (e.g. Wang et al., 2018)
			B	10	Small water bodies (lakes, ponds) can be observed
			T	1000	Medium to large sized water bodies as demonstrated through ESA Lakes_cci
<b>Vertical Resolution</b>			G	n/a	
			B	n/a	
			T	n/a	
<b>Temporal Resolution</b>	day		G	1	Detection of interannual variability and decadal shifts in ice cover and for improving ice, weather forecasting and climate models
			B	< 1	Allows daily observations under variable cloud cover from optical satellite data
			T	3-7	Useful for contrasting extreme ice years, numerical weather forecasting, and assessing lake models used as parameterization schemes in climate models
<b>Timeliness</b>	day	From observation day	G	1	In support of ice forecasting systems (e.g. NOAA's Great Lakes Coastal Forecasting System (GLCFS))
			B		
			T	365	To support annual climate reporting
<b>Required Measurement Uncertainty (2-sigma)</b>	%		G	1	
			B		
			T	10	
<b>Stability</b>	%	Per decade	G	0.1	
			B		
			T	1	
<b>Standards and References</b>	<ul style="list-style-type: none"> <li>– ATBD and URD of ESA Lakes_cci</li> <li>– Duguay, C.R., M. Bernier, Y. Gauthier, and A. Kouraev, 2015. Remote sensing of lake and river ice. In <i>Remote Sensing of the Cryosphere</i>, Edited by M. Tedesco. Wiley-Blackwell (Oxford, UK), pp. 273-306.</li> <li>– Wang, J., C.R. Duguay, and D.A. Clausi, V. Pinard, and S.E.L. Howell, 2018. Semi-automated classification of lake ice cover using dual polarization RADARSAT-2 imagery. <i>Remote Sensing</i>, 10(11), 1727; <a href="https://doi.org/10.3390/rs10111727">https://doi.org/10.3390/rs10111727</a>.</li> </ul>				

## 7.2.2 ECV Product: Lake ice thickness (LIT)

Requirements						
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards	
<b>Name</b>	Lake ice thickness (LIT)					
<b>Definition</b>	Thickness of ice on a lake					
<b>Unit</b>	cm					
<b>Note</b>	<ul style="list-style-type: none"> <li>- LIT measurements are largely based on in situ observational networks. Satellite-based retrieval algorithms are under development (research stage), not operational yet.</li> <li>- On-ice snow depth measurements are also useful for both climate monitoring as well as for assessing and improving lake models.</li> </ul>					
<b>Horizontal Resolution</b>	m	Point-scale for in situ measurements	G	50	From synthetic aperture radar (SAR)	
			B			
			T	1000-10000	From radar altimetry and passive microwave data (Kang et al., 2014)	
<b>Vertical Resolution</b>	cm		G	1-10	Lower number from in situ measurements, higher number from satellite observations	
			B			
			T	3-15	Lower number from in situ measurements, higher number from satellite observations	
<b>Temporal Resolution</b>	day		G	1	From satellite observations	
			B			
			T	365	Annual summary of in situ measurements from yearbooks	
<b>Timeliness</b>	day		G	1	Using satellite telecommunication systems for in situ measurements; also daily from satellites for numerical models such as NOAA's Great Lakes Coastal Forecasting System (GLCFS)	
			B			
			T	365	To support annual climate reporting	
<b>Required Measurement Uncertainty (2-sigma)</b>	cm		G	5		
			B			
			T	15		
<b>Stability</b>	cm	Per decade	G	1		
			B			
			T	10		
<b>Standards and References</b>	<ul style="list-style-type: none"> <li>- National standards</li> <li>- Kang, K.-K., C. R. Duguay, J. Lemmetyinen, and Y. Gel, 2014. Estimation of ice thickness on large northern lakes from AMSR-E brightness temperature measurements. <i>Remote Sensing of Environment</i>, 150: 1-19, <a href="http://dx.doi.org/10.1016/j.rse.2014.04.016">http://dx.doi.org/10.1016/j.rse.2014.04.016</a>.</li> </ul>					



### 7.2.3 ECV Product: Lake Water Leaving Reflectance

Name						Lake Water Leaving Reflectance					
Definition		Water-leaving reflectance in discrete wavebands of electromagnetic radiation from near-UV through visible to near infrared and up to shortwave infrared, fully normalized for viewing and solar incident angles.									
Unit		Dimensionless									
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m		G	100	Smaller water bodies included with resolution < 300m, as demonstrated through Copernicus Global Land Service.						
			B	10	Rivers and small water bodies can be observed						
			T	1000	Medium to large sized water bodies (up to 50% of global inland water surface area), as demonstrated through ESA Lakes_cci						
Vertical Resolution	m		G	1	Identify thermal, density or bio-optical stratification						
			B	n/a	Identification of vertical stratification from above-water radiometry (requires hyperspectral sensors)						
			T	n/a	Water column is assumed well-mixed in the layer extending from the surface to the first optical depth, where 90% of reflected light interacts						
Temporal Resolution	day	At equator	G	1	Decade-scale shifts in biological components become detectable in individual water bodies						
			B	<1	Allows daily observations under variable cloud cover						
			T	3-30	Decade-scale shifts in biological components become detectable within global lake biomes						
Timeliness	day	From observation day	G	30	Satellite observations supplied with reliable meteorological ancillary data						
			B	1	Episodic events can be detected in near real-time						
			T	365	Annual extension of existing data records based on measurements supplied with reliable meteorological records						
Required Measurement Uncertainty (2-sigma)	%	At peak reflectance amplitude	G	10	Expected to allow derived water column properties to be estimated within 0.1 mg m <sup>-3</sup> chlorophyll-a and 1 g m <sup>-3</sup> suspended matter or 1 NTU. See ESA Lakes_cci URD. Impact of observation uncertainty will vary with lake type (shape of reflectance spectrum).						
			B								
			T	30	A threshold cannot be clearly defined for all optical water types and lake morphologies. A larger number of observations (large lakes) may compensate for increased per-observation uncertainty.						
Stability	%	per decade	G	0.1	For in situ fiducial reference observations						
			B								
			T	1	Equates to 0.0001/decade for LWLR, 0.1 mg m <sup>-3</sup> per decade for chlorophyll-a and 0.1 g m <sup>-3</sup> for suspended matter or turbidity						
Standards and References	ATBD and URD of ESA Lakes_cci										

### 7.2.4 ECV Product: Lake surface water temperature (LSWT)

Name						Lake surface water temperature (LSWT)					
Definition						Temperature of the lake surface.					
Unit						°C					
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution			G	100m	Using satellite technics						
			B								
			T	5 km <sup>2</sup>							
Vertical Resolution	-		G								
			B								
			T								
Temporal Resolution	day		G	3 hours	To capture diurnal cycles						
			B	1							
			T	10							
Timeliness	day		G	1	Currently achievable with satellite observations. Annual summary in the form of yearbook can also provide useful long-timeseries.						
			B	3 months							
			T	1 year							
Required Measurement Uncertainty (2-sigma)	°C		G	0,1	For yearbooks						
			B	0.3							
			T	0.6							
Stability	°C/decade		G	0,1							
			B								
			T	0.25							
Standards and References	Technical Regulations, volume III, Hydrology, 2006 edition, WMO-No.49										

### 7.2.5 ECV Product: Lake Water Extent (LWE)

Name						Lake Water Extent (LWE)					
Definition		Areal extent of the surface of a lake.									
Unit		Km <sup>2</sup>									
Note		LWE is only measurable using satellite imagery. For shallow lakes the LWE variable is more relevant than the Lake Water Level to detect climate change signal (Mason et al., 1994)									
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m		G	10	Using sentinel-2 missions. Allows to determine small extent variations						
			B	30	Using landsat (5,7,8) missions. Still relevant for shallow lakes with high extent potential variations						
			T	1000	is useful to partition surface energy fluxes						
Vertical Resolution			G								
			B								
			T								
Temporal Resolution	day		G	5	Looks reasonable for climate change studies. Consistent with possibilities offered by satellite technologies (sentinel-2 constellation can provide in the best case images every 5 days). Will allow detecting LWE changes linked to extreme events.						
			B								
			T	30	For long term evolution of lake extent changes monthly basis is still acceptable and usable. useful to partition surface energy fluxes						
Timeliness	day		G	5	To be consistent with temporal resolution and possibilities offered by satellite technologies (sentinel-2 constellation can provide in the best case images every 5 days)						
			B								
			T	365	Climate scale						
Required Measurement Uncertainty (2-sigma)	%		G	5	For LWE, the uncertainty relatively to the total surface makes sense.						
			B								
			T								
Stability	% /decade		G	5							
			B								
			T								
Standards and References	Algorithm Theoretical Basis Document (ATBD) of LWE (Lake Water Extent) calculation under ESA's CCI (Climate change Initiative) program. Mason I.M., Guzkowska M.A.J., Rapley C.G., and Street-Perrot F.A., (1994). the response of lake levels and areas to climate change, <i>Climate Change</i> 27, 161-197.										

## 7.2.6 ECV Product: Lake Water Level

Name						Lake Water Level					
Definition						Lake Water Level (LWL)					
Unit						Elevation of the free surface of a lake relative to a specified vertical datum					
Note						cm					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	-		G		In situ observation by a point measurement on gauge						
			B								
			T								
Vertical Resolution			G		In situ observation by a point measurement on gauge						
			B								
			T								
Temporal Resolution	day		G	1							
			B								
			T	365							Annual summary in the form of yearbook
Timeliness	day		G	1	In some case it can be interesting to have near real time lake level changes (in case of extreme events)						
			B								
			T	365							For yearbooks
Required Measurement Uncertainty (2-sigma)	cm		G	5							
			B								
			T	10							Allows to use the considered characteristic in global and regional climate models
Stability	Cm/decade		G	1							
			B								
			T	10							Allows to use the considered characteristic in global and regional climate models
Standards and References	Technical Regulations, volume III, Hydrology, 2006 edition, WMO-No.49 Guide to Hydrological Practices, sixth edition,2008, WMO-No.168										

## 7.3 River Discharge

### 7.3.1 ECV Product: Water level

Name						Water level					
Definition		Water level is the elevation of the surface of a river or a lake, reservoir regarding a reference (the ellipsoid).									
Unit		m									
Note											
						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m		G	Rivers >20-	In addition to global and regional hydrological data, measurement of least anthropogenic impacted basins to derive changes in rainfall distribution, intensity and determine climate signals.						
			B	Rivers >20-50m	Measurement of changes in seasonal level patterns at regional level.						
			T	Rivers >50m							
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution			G	Hourly	Required to monitor single events and for assessment of extreme events						
			B	Daily	Suitable to determine general river/lakes patterns at regional and global scales						
			T	Monthly	-Suitable to support climate related modelling of terrestrial, oceanographic and atmospheric systems						
Timeliness			G	Daily	For high resolution studies and for preparedness, mitigation during short term events						
			B	Monthly	Regional forecasting and modelling						
			T	Yearly	For climatology the provision of monthly data within one year after data collection is necessary						
Required Measurement Uncertainty (2-sigma)	cm		G	10							
			B	10							
			T	10							
Stability	m/yr	Maximum drift over reference period	G	0.01	For high resolution climatology and necessary to validate variability and extremes						
			B	0.01							
			T	0.05	For climatologies						
Standards and References	WMO Technical Regulations of Hydrology (WMO-No.49) and Guide to hydrological practices (WMO-No.168) ISO 1100-1 (1996) Measurement of liquid flow in open channels-Part I: Establishment and operation of a gauging station ISO 748 (1997) Measurement of liquid flow in open channels-Velocity area methods WMO (WMO-519) Manual on stream gauging Volume I-Fieldwork and Volume II-Computation of discharge ISO Technical Committee 113 is dealing with all standards related to Hydrometry ISO/TS 24154 (2005) The principles of operation, construction, maintenance and application of acoustic Doppler current profilers (ADCP)										

### 7.3.2 ECV Product: River Discharge

Name						River Discharge					
Definition		River discharge is defined as the volume of water passing a measuring point or gauging station in a river in a given time. For station calibration both, the flow velocity and the cross-sectional area has to be measured a few times a year. River-discharge measurements have essential direct applications for water management and related services, including flood protection. They are needed in the longer term to help identify and adapt to some of the most significant potential effects of climate change. The flow of freshwater from rivers into the oceans also needs to be monitored because it reduces ocean salinity, and changes in flow may thereby influence the thermohaline circulation.									
Unit		m <sup>3</sup> /s									
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution			G	4,000 stations	In addition to global and regional hydrological data, measurement of least anthropogenic impacted basins to derive changes in rainfall distribution, intensity and determine climate signals.						
			B	1,400 stations	Measurement of changes in seasonal discharge patterns at regional level.						
			T	600 stations globally	Major rivers along the continental fringes to capture the freshwater influx to the oceans which has an impact on ocean temperature and salinity which in turn has impacts on ocean currents and weather systems.						
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution			G	Hourly	Required to monitor single events and for assessment of extreme events						
			B	Daily	Suitable to determine general discharge patterns at regional and global scales						
			T	Monthly	-Suitable to support climate related modelling of terrestrial, oceanographic and atmospheric systems						
Timeliness			G	Daily	For high resolution studies and for preparedness, mitigation during short term events						
			B	Monthly	Regional forecasting and modelling						
			T	Yearly	For climatology the provision of monthly data within one year after data collection is necessary						
Required Measurement Uncertainty (2-sigma)	%	relative	G	5	Improved measurement techniques and sufficient resources						
			B	10							
			T	15	Discharge measurements are affected by a number of changing conditions and uncertainties due to complex calibration needs such as river cross section flow velocities, changing channel conditions, siltation, scour, weed growth, ice conditions						
Stability	m/yr	Maximum drift over reference period	G	0.01	For high resolution climatology and necessary to validate discharge variability and extremes						
			B	0.05							
			T	0.1	For climatologies						
Standards and References	WMO Technical Regulations of Hydrology (WMO-No.49) and Guide to hydrological practices (WMO-No.168) ISO 1100-1 (1996) Measurement of liquid flow in open channels-Part I: Establishment and operation of a gauging station ISO 748 (1997) Measurement of liquid flow in open channels-Velocity area methods WMO (WMO-519) Manual on stream gauging Volume I-Fieldwork and Volume II-Computation of discharge ISO Technical Committee 113 is dealing with all standards related to Hydrometry ISO/TS 24154 (2005) The principles of operation, construction, maintenance and application of acoustic Doppler current profilers (ADCP)										

## 7.4 Soil moisture

### 7.4.1 ECV Product: Freeze/thaw

Name		Freeze/thaw			
Definition	Flag indicating whether the land surface is frozen or not				
Unit	Unitless				
Note	Freeze/thaw is subsidiary variable of the ECV soil moisture. It is needed because most measurement techniques do not allow to measure soil moisture when the ground is frozen. Also, land-surface processes fundamentally change when the soil is frozen. Instead of binary values (e.g. thawed = 0 and frozen = 1) probabilities (i.e. probability that the soil is frozen) may be used.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km	Size of grid cell	G	1	Same as for Surface Soil Moisture: Needed to fully resolve highly-dynamic processes taking place at the land-atmosphere interface surface (convective rainfall, orographic effects, etc.)
			B	10	Same as for Surface Soil Moisture: Many climate and earth system models are moving to a grid size of 10 km or finer.
			T	50	Same as for Surface Soil Moisture: This definition reflects a practical understanding of the boundary between climate science and other related geoscientific fields such as hydrology, agronomy, or ecology.
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	hours	Time between measurements	G	6	Same as for Surface Soil Moisture: Needed to fully resolve highly-dynamic processes taking place at the land-atmosphere interface surface; Needed to depict the interplay between soil moisture, precipitation and evaporation
			B	24	Same as for Surface Soil Moisture: Needed for closing water balance at daily scales
			T	48	Same as for Surface Soil Moisture: Important land-atmospheric processes are missed, but drying and wetting trends can be depicted.
Timeliness	houe		G	3	Same as for Surface Soil Moisture: For climate communication and improved preparedness
			B	6	Same as for Surface Soil Moisture: To support the assessment of on-going extreme events (droughts, extreme wetness)
			T	48	Same as for Surface Soil Moisture: For assessments and re-analysis
Required Measurement Uncertainty (2-sigma)	%	Overall classification accuracy	G	98	Same as for Surface Soil Moisture: More demanding goal is probably unrealistic due to high variability of soil moisture at small-scales due to changes in soil properties, topography, vegetation cover
			B	95	Same as for Surface Soil Moisture: Accuracy goal as first adopted for the dedicated soil moisture satellites SMOS and SMAP. Later adopted for GCOS and reconfirmed at the 4 <sup>th</sup> Satellite Soil Moisture Validation and Application Workshop (Wagner, W., T.J. Jackson, J.J. Qu, R. de Jeu, N. Rodriguez-Fernandez, R. Reichle, L. Brocca, W. Dorigo (2017) Fourth Satellite Soil Moisture Validation and Application Workshop, GEWEX News, 28(4), 13-14.)
			T	90	Same as for Surface Soil Moisture: This value traces back to the accuracy goals as specified for the SMOS and SMAP satellites designed for measuring soil moisture.
Stability	Unknown	Unknown	G	0.005	Same as for Surface Soil Moisture: This value still lacks justification in the scientific literature and needs to be critically assessed.
			B	0.01	Same as for Surface Soil Moisture: This value still lacks justification in the scientific literature and needs to be critically assessed.
			T	0.02	Same as for Surface Soil Moisture: This value still lacks justification in the scientific literature and needs to be critically assessed.
Standards and	Required Measurement Uncertainty (2-sigma): Confusion matrices should be computed for different periods of the year. In particular, the transition periods from frozen to thawed conditions are most				

**References** critical for assessing the accuracy of the freeze/thaw estimates.

### 7.4.2 ECV Product: Surface Inundation

Name						Surface Inundation					
Definition						Flag indicating whether the land surface is inundated or not					
Unit						Unitless					
Note						Surface inundation is subsidiary variable of the ECV soil moisture. It is needed because most measurement techniques do not allow to measure soil moisture when the soil surface is inundated. Also, land-surface processes fundamentally change when the soil is inundated. Instead of binary values probabilities (i.e. probability that the soil is inundated) may be used.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	Size of grid cell	G	1	Same as for Surface Soil Moisture: Needed to fully resolve highly-dynamic processes taking place at the land-atmosphere interface surface (convective rainfall, orographic effects, etc.)						
			B	10	Same as for Surface Soil Moisture: Many climate and earth system models are moving to a grid size of 10 km or finer.						
			T	50	Same as for Surface Soil Moisture: This definition reflects a practical understanding of the boundary between climate science and other related geoscientific fields such as hydrology, agronomy, or ecology.						
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution	hours	Time between measurements	G	6	Same as for Surface Soil Moisture: Needed to fully resolve highly-dynamic processes taking place at the land-atmosphere interface surface; Needed to depict the interplay between soil moisture, precipitation and evaporation						
			B	24	Same as for Surface Soil Moisture: Needed for closing water balance at daily scales						
			T	48	Same as for Surface Soil Moisture: Important land-atmospheric processes are missed, but drying and wetting trends can be depicted.						
Timeliness	hour		G	3	Same as for Surface Soil Moisture: For climate communication and improved preparedness						
			B	6	Same as for Surface Soil Moisture: To support the assessment of on-going extreme events (droughts, extreme wetness)						
			T	48	Same as for Surface Soil Moisture: For assessments and re-analysis						
Required Measurement Uncertainty (2-sigma)	%	Overall classification accuracy	G	98	Same as for Surface Soil Moisture: More demanding goal is probably unrealistic due to high variability of soil moisture at small-scales due to changes in soil properties, topography, vegetation cover						
			B	95	Same as for Surface Soil Moisture: Accuracy goal as first adopted for the dedicated soil moisture satellites SMOS and SMAP. Later adopted for GCOS and reconfirmed at the 4 <sup>th</sup> Satellite Soil Moisture Validation and Application Workshop (Wagner, W., T.J. Jackson, J.J. Qu, R. de Jeu, N. Rodriguez-Fernandez, R. Reichle, L. Brocca, W. Dorigo (2017) Fourth Satellite Soil Moisture Validation and Application Workshop, GEWEX News, 28(4), 13-14.)						
			T	90	Same as for Surface Soil Moisture: This value traces back to the accuracy goals as specified for the SMOS and SMAP satellites designed for measuring soil moisture.						
Stability	Unknown	Unknown	G	0.005	Same as for Surface Soil Moisture: This value still lacks justification in the scientific literature and needs to be critically assessed.						
			B	0.01	Same as for Surface Soil Moisture: This value still lacks justification in the scientific literature and needs to be critically assessed.						
			T	0.02	Same as for Surface Soil Moisture: This value still lacks justification in the scientific literature and needs to be critically assessed.						
Standards											



and  
References

### 7.4.3 ECV Product: Root zone soil moisture

Root zone soil moisture					
<b>Name</b>	Root zone soil moisture				
<b>Definition</b>	The root-zone soil moisture content refers to the average water content in the root-zone				
<b>Unit</b>	m <sup>3</sup> /m <sup>3</sup>				
<b>Note</b>	There is no agreed definition of the depth of the root-zone layer. Considering that many in situ networks have sensors up to a depth of about 30 cm, a first definition of the root-zone layer may be 0-30 cm or similar ranges. Measuring the water content in the root-zone is either not possible (e.g. when using microwave satellites) or costly (e.g. using in situ measurements). Hence, the root-zone soil moisture content has initially not been considered by GCOS. However, as most applications require information about the soil moisture content in deeper soil layers, the root-zone soil moisture content was added to the ECV soil moisture in the GCOS 2016 Implementation Plan. Because it is relatively new variable, all specifications given above should be regarded with care.				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km	Size of grid cell	G	1	Same as for Surface Soil Moisture: Needed to fully resolve highly-dynamic processes taking place at the land-atmosphere interface surface (convective rainfall, orographic effects, etc.)
			B	10	Same as for Surface Soil Moisture: Many climate and earth system models are moving to a grid size of 10 km or finer.
			T	50	Same as for Surface Soil Moisture: This definition reflects a practical understanding of the boundary between climate science and other related geoscientific fields such as hydrology, agronomy, or ecology.
Vertical Resolution	cm		G	50	Based on ECMWF
			B	75	Based on ECMWF
			T	100	Based on ECMWF
Temporal Resolution	hours	Time between measurements	G	6	Same as for Surface Soil Moisture: Needed to fully resolve highly-dynamic processes taking place at the land-atmosphere interface surface; Needed to depict the interplay between soil moisture, precipitation and evaporation
			B	24	Same as for Surface Soil Moisture: Needed for closing water balance at daily scales
			T	48	Same as for Surface Soil Moisture: Important land-atmospheric processes are missed, but drying and wetting trends can be depicted.
Timeliness			G	1 week	Same as for Surface Soil Moisture: For climate communication and improved preparedness
			B	1 month	Same as for Surface Soil Moisture: To support the assessment of on-going extreme events (droughts, extreme wetness)
			T	1 year	Same as for Surface Soil Moisture: For assessments and re-analysis
Required Measurement Uncertainty (2-sigma)	m <sup>3</sup> /m <sup>3</sup>	Unbiased root mean square error	G	0.03	Same as for Surface Soil Moisture: More demanding goal is probably unrealistic due to high variability of soil moisture at small-scales due to changes in soil properties, topography, vegetation cover
			B	0.04	Same as for Surface Soil Moisture: Accuracy goal as first adopted for the dedicated soil moisture satellites SMOS and SMAP. Later adopted for GCOS and reconfirmed at the 4 <sup>th</sup> Satellite Soil Moisture Validation and Application Workshop (Wagner, W., T.J. Jackson, J.J. Qu, R. de Jeu, N. Rodriguez-Fernandez, R. Reichle, L. Brocca, W. Dorigo (2017) Fourth Satellite Soil Moisture Validation and Application Workshop, GEWEX News, 28(4), 13-14.)
			T	0.08	Same as for Surface Soil Moisture: This value traces back to the accuracy goals as specified for the SMOS and SMAP satellites designed for measuring soil moisture.
Stability	m <sup>3</sup> /m <sup>3</sup> per reference period (> 1)		G	0.005	Same as for Surface Soil Moisture: This value still lacks justification in the scientific literature and needs to be critically assessed.
			B	0.01	Same as for Surface Soil Moisture: This value still lacks justification in the scientific literature and needs to be

	year)				critically assessed.
			T	0.02	Same as for Surface Soil Moisture: This value still lacks justification in the scientific literature and needs to be critically assessed.
<b>Standards and References</b>					

#### 7.4.4 ECV Product: Surface soil moisture

<b>Name</b>	Surface soil moisture (Also sometimes referred to as topsoil moisture, surface wetness, surface humidity)				
<b>Definition</b>	The depth of the topmost soil layer is often only qualitatively defined as the actual sensing depth varies with measurement technique, water content, and soil properties and usually cannot be specified with any accuracy.				
<b>Unit</b>	m <sup>3</sup> /m <sup>3</sup>				
<b>Note</b>	Soil moisture refers to the average water content in the soil, which can be expressed in volumetric, gravimetric or relative (e.g. degree of saturation) units. All units can be inter-converted given the availability of soil property information (bulk density, porosity etc.), yet the use of the volumetric soil moisture content as the standard measurement unit is encouraged.				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km		G	1	Needed to fully resolve highly-dynamic processes taking place at the land-atmosphere interface surface (convective rainfall, orographic effects, etc.)
			B	10	Many climate and earth system models are moving to a grid size of 10 km or finer.
			T	50	This definition reflects a practical understanding of the boundary between climate science and other related geoscientific fields such as hydrology, agronomy, or ecology.
<b>Vertical Resolution</b>	N/A		G		
			B		
			T	1	For modelling bare soil evaporation and LST a very thin skin layer is required (See Dorigo et al., 2017, example from ECMWF)
<b>Temporal Resolution</b>	hours		G	6	Needed to fully resolve highly-dynamic processes taking place at the land-atmosphere interface surface; Needed to depict the interplay between soil moisture, precipitation and evaporation
			B	24	Needed for closing water balance at daily scales
			T	48	Important land-atmospheric processes are missed, but drying and wetting trends can be depicted.
<b>Timeliness</b>	hour		G	3	For climate communication and improved preparedness
			B	6	To support the assessment of on-going extreme events (droughts, extreme wetness)
			T	48	For assessments and re-analysis
<b>Required Measurement Uncertainty (2-sigma)</b>	m <sup>3</sup> /m <sup>3</sup>	Unbiased root mean square error	G	0.03	More demanding goal is probably unrealistic due to high variability of soil moisture at small-scales due to changes in soil properties, topography, vegetation cover
			B	0.04	Accuracy goal as first adopted for the dedicated soil moisture satellites SMOS and SMAP. Later adopted for GCOS and reconfirmed at the 4 <sup>th</sup> Satellite Soil Moisture Validation and Application Workshop (Wagner, W., T.J. Jackson, J.J. Qu, R. de Jeu, N. Rodriguez-Fernandez, R. Reichle, L. Brocca, W. Dorigo (2017) Fourth Satellite Soil Moisture Validation and Application Workshop, GEWEX News, 28(4), 13-14.)
			T	0.08	This value traces back to the accuracy goals as specified for the SMOS and SMAP satellites designed for measuring soil moisture.
<b>Stability</b>	m <sup>3</sup> /m <sup>3</sup> per reference period (> 1 year)		G	0.005	This value still lacks justification in the scientific literature and needs to be critically assessed.
			B	0.01	This value still lacks justification in the scientific literature and needs to be critically assessed.
			T	0.02	This value still lacks justification in the scientific literature and needs to be critically assessed.
<b>Standards and References</b>	<p>Required Measurement Uncertainty (2-sigma) : Uncertainty refers to the error standard deviation which is assumed to be (temporally) stationary. The measurement uncertainty is commonly estimated by the unbiased Root-Mean-Square-Error (ubRMSE) over a set of so-called core-validation sites (i.e., densely-sampled situ measurement sites that are assumed to be representative for satellite-footprint-scale soil moisture conditions and dynamics), which are averaged to obtain a single representative number for retrieval quality. The application of such validation concept is pragmatic, yet a few issues should be noticed:</p> <ul style="list-style-type: none"> <li>• Only few stations worldwide (~20) fulfil the requirements to be considered core-validation sites, which are very unlikely to be fully representative for global (uncertainty) regimes</li> <li>• Uncertainties are therefore often additionally estimated over a larger set of so-called sparse sites (i.e. single station measurements) and relative to land surface models, but usually no or only an insufficient assessment of representativeness errors and/or reference data uncertainty is provided</li> <li>• The impacts of site selection and estimation uncertainties are usually not investigated. Therefore, confidence ranges for measurement uncertainty estimates are hardly available.</li> </ul>				

- Measurement uncertainties alone are not a sufficient criterion for data quality. While a certain noise level (e.g., 0.04 m<sup>3</sup>/m<sup>3</sup>) might be tolerable in very dynamic soil moisture regimes, the same noise level may render a product useless in areas with lower soil moisture variability. However, in principle, the transition from mere uncertainty quantification to spatially comparable quality estimation can be easily done by transitioning to signal-to-noise ratio (SNR) based metrics.
  - Uncertainty requirements commonly don't have a traceable connection to application requirements which might differ significantly among user groups.
- Taken as a whole, current concepts of specifying accuracy requirements are incomplete and partly questionable, and should therefore be revised taking into account the above described issues. Notice that EUMETSAT has recently changed their H-SAF soil moisture product requirements by specifying signal-to-noise ratio (SNR) target requirements for committed areas (global land areas excluding deserts, rainforests, and high-latitude areas with mostly frozen/snow-covered regimes)

## 7.5 ECV: Terrestrial Water Storage (TWS)

### 7.5.1 ECV Product: TWS Anomaly

Terrestrial water storage (TWS) anomaly					
<b>Name</b>	Terrestrial water storage (TWS) anomaly				
<b>Definition</b>	TWS is the total amount of water stored in all continental storage compartments (ice caps, glaciers, snow cover, soil moisture, groundwater, surface water bodies, water in biomass). The change of TWS over time balances the budget of the water fluxes precipitation, evapotranspiration and runoff, i.e., it closes the continental water balance.				
<b>Unit</b>	km <sup>3</sup> or mm water equivalent (kg/m <sup>2</sup> )				
<b>Note</b>	Measuring TWS is possible by satellite and terrestrial gravimetry in relative terms only, not in absolute values. Thus, TWS is given as the deviation relative to a long-term mean (TWS anomaly).				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km		G	1	Resolve the topography- and land cover-driven patterns of landscape-scale water storage dynamics, e.g., ref #2
			B	10	Many climate and Earth system models are moving to a grid size of 10 km or finer. Often a relevant local to regional water management scale
			T	200	Comprehensive continental-scale patterns of water storage changes, e.g., ref #1
Vertical Resolution			G		Not applicable as total water storage represents an integrative value in the vertical, over all storage compartments and depths
			B		
			T		
Temporal Resolution	days		G	1	To resolve water storage changes caused by heavy precipitation events and occurring during flood events
			B		
			T	30	To resolve major seasonal, intra- and inter-annual dynamics as well as long-term trends of water storage
Timeliness	days		G	1	Required latency for warning for and managing of extreme events, in particular floods
			B		
			T	60-90	Current latency of GRACE-FO based TWS products
Required Measurement Uncertainty (2-sigma)	mm		G	1	Order of magnitude required to resolve the water storage effect of daily evapotranspiration
			B		
			T	20	Order of magnitude to resolve monthly TWS variations
Stability	mm/yr		G	<1	Stability needed to detect subtle long-term TWS trends caused by global change and anthropogenic impacts on the water cycle
			B		
			T	<5	Stability needed to resolve major long-term water storage changes, e.g., related to melting ice sheets, groundwater depletion
<b>Standards and References</b>	<ul style="list-style-type: none"> <li>#1 Pail, R., Bingham, R., Braitenberg, C., Dobslaw, H., Eicker, A., Güntner, A., Horwath, M., Ivins, E., Longuevergne, L., Panet, I., Wouters, B., Panel, I.E. (2015): Science and User Needs for Observing Global Mass Transport to Understand Global Change and to Benefit Society. <i>Surveys in Geophysics</i> 36, 743-772.</li> <li>#2 Güntner, A., Reich, M., Mikolaj, M., Creutzfeldt, B., Schroeder, S., Wziontek, H. (2017): Landscape-scale water balance monitoring with an iGrav superconducting gravimeter in a field enclosure. <i>Hydrology and Earth System Sciences</i>, 21(6), 3167-3182, doi: 10.5194/hess-21-3167-2017.</li> </ul>				

## 8. CRYOSPHERE

### 8.1 Glaciers

#### 8.1.1 ECV Product: Glacier Ice Thickness

Name						Glacier Ice Thickness					
Definition						Global dataset of glacier ice thickness					
Unit						m					
Note						Glacier ice thickness is measured in-situ by the radio-echo sounding (Pleues and Hubbard, 2001).					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution			G								
			B								
			T								
Vertical Resolution	m	The vertical resolution highly dependent on the frequency of GPR.	G	~1	Vertical resolution for 20 MHz GPR						
			B								
			T	~5	Vertical resolution for 200 MHz GPR						
Temporal Resolution			G								
			B	5 years	Length of time period between two surveys usually used in glaciology.						
			T	Decadal	The frequency "decadal" refers to the lowest requirement on the length of the time period needed between two surveys to avoid missing geometry change information.						
Timeliness		In view of the low need for temporal sampling, the timeliness is not so important.	G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	m	Uncertainty at point location.	G								
			B								
			T	5	Uncertainties even only consider at specific point can be influenced by various factors. As evaluated from an example study, uncertainty at point location is around 5 m. (Lapazaran et al., 2016)						
Stability		Glacier ice thickness surveyed independently. No cumulative effect of the measurement system should be considered.	G								
			B								
			T								
Standards and References	<ul style="list-style-type: none"> <li>• Pleues, L. A. and B. Hubbard (2001). "A review of the use of radio-echo-echo sounding in glaciology." <i>Progress in Physical Geography</i> 25(2): 203-236.</li> <li>• Lapazaran, J. J., J. Otero, A. Martín-Español and F. J. Navarro (2016). "On the errors involved in ice-thickness estimates I: ground-penetrating radar measurement errors." <i>Journal of Glaciology</i> 62(236): 1008-1020.</li> </ul>										

### 8.1.2 ECV Product: Glacier Mass Change

Name						Glacier Mass Change					
Definition		Global dataset of glacier (surface) mass changes from glaciological method									
Unit		kg per m <sup>2</sup>									
Note		Glacier mass change is measured in-situ by the glaciological method (Cogley et al. 2011, Zemp et al. 2013).									
Requirements						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution			G								
			B								
			T								
Vertical Resolution	m		G								
			B	0.01	The vertical resolution "0.01 m or 10 kg per m <sup>2</sup> " refers to the precision of ablation stake and snow pit readings at point locations						
			T	0.05	Lowest requirement in glaciology						
Temporal Resolution			G	monthly	Monthly observations in melting season to depict melting processes.						
			B	seasonal	The frequency "seasonal to annual" refers to the measurement campaigns which ideally are carried out at the time of maximum accumulation (in spring) and of maximum ablation (at the end of hydrological year).						
			T	annual	The frequency "seasonal to annual" refers to the measurement campaigns which ideally are carried out at the time of maximum accumulation (in spring) and of maximum ablation (at the end of hydrological year).						
Timeliness	days		G								
			B								
			T	365	Ideally, glaciological measurement become available after completion of the annual field campaigns. The WGMS grants a one-year retention period to allow investigators time to properly analyze, document, and publish their data before submitting the data.						
Required Measurement Uncertainty (2-sigma)	kg m <sup>-2</sup> a <sup>-1</sup>	Glacier-wide (random) uncertainty estimate including uncertainties from point measurements, snow, firn and ice density conversions, and extrapolation to glacier-wide results.	G								
			B	0.2	The Required Measurement Uncertainty (2-sigma) "200 kg m <sup>-2</sup> a <sup>-1</sup> " (= 0.2 m w.e. m <sup>-2</sup> a <sup>-1</sup> ) refers to the glacier-wide annual balance which is interpolated from the point measurements. The target value was selected based on a review of long-term mass balance measurement series (Zemp et al. 2013).						
			T	0.5	Lowest requirement in glaciology.						
Stability	kg per m <sup>2</sup>	Glacier-wide bias in mass change measurements over a decade.	G								
			B								
			T	2	The stability can be assessed by validation and – if necessary – calibration of a glaciological times series with decadal results from the geodetic method (cf. Zemp et al. 2013). As a rule of thumb, stability is recommended to be better than 300 kg m <sup>-2</sup> a <sup>-1</sup> (cf. Zemp et al. 2013).						
Standards and References	<ul style="list-style-type: none"> <li>• Zemp, M., Thibert, E., Huss, M., Stumm, D., Rolstad Denby, C., Nuth, C., Nussbaumer, S.U., Moholdt, G., Mercer, A., Mayer, C., Joerg, P.C., Jansson, P., Hynek, B., Fischer, A., Escher-Vetter, H., Elvehøy, H., and Andreassen, L.M. (2013): Reanalysing glacier mass balance measurement series. <i>The Cryosphere</i>, 7, 1227-1245, doi:10.5194/tc-7-1227-2013.</li> <li>• Zemp, M., Frey, H., Gärtner-Roer, I., Nussbaumer, S. U., Hoelzle, M., Paul, F., ... Vincent, C. (2015). Historically unprecedented global glacier decline in the early 21st century. <i>Journal of Glaciology</i>, 61(228), 745–762. <a href="http://doi.org/10.3189/2015JoG15J017">http://doi.org/10.3189/2015JoG15J017</a></li> </ul>										

### 8.1.3 ECV Product: Glacier Elevation Change

Name						Glacier Elevation Change					
Definition						Global dataset of glacier elevation changes from geodetic methods.					
Unit						m/year					
Note						Glacier elevation change is measured in-situ and remotely sensed using the geodetic method (Cogley et al. 2011, Zemp et al. 2013).					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m		G	1	The fine resolution (1-5 m) data be used to extract mass change and dynamic characteristics in area with abnormal topography (quite steep slope, ice fall, calving snout...). A stable size of raster for measuring volume change (Joerg and Zemp, 2014). Resolution of SRTM, which most widely used as reference to extract elevation change.						
			B	25							
			T	90							
Vertical Resolution	m		G	0.01	Annual mass change of glaciers be evaluated with data with vertical resolution < 0.01 m (e.g. Xu et al., 2019). Roughly corresponding to the resolution to evaluated the annual mean mass change if elevation change observed decadal. The targets for vertical resolutions refer to requirements for differences of digital elevation models (dDEM) in mountainous terrain (e.g. Joerg and Zemp, 2014).						
			B	2							
			T	5							
Temporal Resolution			G	Yearly	To evaluate annual mass change and detect the signal of potential abnormal events (e.g. surge). The frequency "decadal" refers to the length of the time period needed between two geodetic surveys in order to safely apply a density conversion from volume to mass change (cf. Huss 2013, Zemp et al. 2013).						
			B								
			T	Decadal							
Timeliness		In view of the low need for temporal sampling, the timeliness is not so important.	G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	m	Glacier-wide (random) uncertainty estimate based on a quality assessment of the digital elevation model differencing product over stable terrain.	G		The Required Measurement Uncertainty (2-sigma) refers to the glacier-wide uncertainty estimate based on a quality assessment of the dDEM product over stable terrain. The value of "2m per decade" (= 0.2 m <sup>2</sup> a <sup>-1</sup> ) is set in relation to the corresponding uncertainty requirement of the glaciological method.						
			B	2							
			T								
Stability	m	Glacier-wide bias in elevation change measurements over a decade.	G		The stability of "2 m/decade" refers to a bias in the glacier-wide change of 0.2m m <sup>-2</sup> a <sup>-1</sup> , which is about one third to half of the average annual ice loss rate over the 20th century (Zemp et al. 2015) and is good enough for validation of glaciological series (Zemp et al. 2013).						
			B	2							
			T								
Standards and References	<ul style="list-style-type: none"> <li>Huss, M. (2013). Density assumptions for converting geodetic glacier volume change to mass change. <i>The Cryosphere</i>, 7(3), 877–887. <a href="http://doi.org/10.5194/tc-7-877-2013">http://doi.org/10.5194/tc-7-877-2013</a></li> <li>Joerg, P. C., &amp; Zemp, M. (2014). Evaluating Volumetric Glacier Change Methods Using Airborne Laser Scanning Data. <i>Geografiska Annaler: Series A, Physical Geography</i>, 96(2), n/a-n/a. <a href="http://doi.org/10.1111/geoa.12036">http://doi.org/10.1111/geoa.12036</a></li> <li>Zemp, M., Thibert, E., Huss, M., Stumm, D., Rolstad Denby, C., Nuth, C., Nussbaumer, S.U., Moholdt, G., Mercer, A., Mayer, C., Joerg, P.C., Jansson, P., Hynek, B., Fischer, A., Escher-Vetter, H., Elvehøy, H., and Andreassen, L.M. (2013): Reanalysing glacier mass balance measurement series. <i>The Cryosphere</i>, 7, 1227-1245, doi:10.5194/tc-7-1227-2013.</li> <li>Zemp, M., Frey, H., Gärtner-Roer, I., Nussbaumer, S. U., Hoelzle, M., Paul, F., ... Vincent, C. (2015). Historically unprecedented global glacier decline in the early 21st century. <i>Journal of Glaciology</i>, 61(228), 745–762. <a href="http://doi.org/10.3189/2015JoG15J017">http://doi.org/10.3189/2015JoG15J017</a></li> <li>Xu, C., Li, Z., Li, H., Wang, F., &amp; Zhou, P. (2018). Long-range terrestrial laser scanning</li> </ul>										



measurements of summer and annual mass balances for Urumqi Glacier No. 1, eastern Tien Shan, China. The Cryosphere Discussions, 1-28. doi: 10.5194/tc-2018-128.

### 8.1.4 ECV Product: Glacier Area

Name						Glacier Area					
Definition						Worldwide inventory of map-projected area covered by glaciers.					
Unit						Km <sup>2</sup>					
Note						Glacier area is the map-projected size of a glacier in km <sup>2</sup> . The product comes as worldwide inventory of glaciers outlines with various related attribute fields (e.g. area, elevation range, glacier characteristics). Typically, a minimum size of 0.01 or 0.02 km <sup>2</sup> is applied, to avoid including small ice patches which do not flow and are therefore not glaciers.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m		G	1	Spatial resolutions better than 15 m (e.g. the 10 m from Sentinel 2) are preferable as typical characteristics of glacier flow (e.g. crevasses) only become visible at this resolution (Paul et al. 2016).						
			B	20	The horizontal resolution of 15-30 m refers to typically used satellite sensors (Landsat and ASTER) to map glaciers.						
			T	100	At coarser resolution the quality of the derived outlines rapidly degrades.						
Vertical Resolution	m	Glacier area is a horizontal 2D product. Vertical resolution is not necessary.	G								
			B	50							
			T	100	Glacier area distribution is usually given per 50 or 100 m elevation bins.						
Temporal Resolution	years		G	1	The temporal sampling "Annual" means that each year the availability of satellite (or aerial) images should be checked to identify the image with the best snow conditions (i.e. snow should not hide the glacier perimeter).						
			B								
			T	10	Decadal data used to evaluate glacier change in regional scale.						
Timeliness	years		G	1							
			B								
			T	10	For multi-temporal inventories at decadal resolution, the timeliness of the product availability is not so important.						
Required Measurement Uncertainty (2-sigma)		Random error of glacier outlines produced in dependency of remote sensing imagery used, with respect to the total glacier area	G	1%	Glacier outlines mapped with high resolution (1 m) remote sensing images (take glacier area in average as 1 km <sup>2</sup> )						
			B	5%	Glacier outlines mapped with medium resolution (15-30 m) remote sensing images (take glacier area in average as 1 km <sup>2</sup> )						
			T	20%	Glacier outlines mapped with low resolution (100 m) remote sensing images (take glacier area in average as 1 km <sup>2</sup> )						
Stability		Glacier area at different times extracted independently. No cumulative effect of the measurement system should be considered.	G								
			B								
			T								
Standards and References	<ul style="list-style-type: none"> <li>• Paul, F., N. Barrand, E. Berthier, T. Bolch, K. Casey, H. Frey, S.P. Joshi, V. Konovalov, R. Le Bris, N. Mölg, G. Nosenko, C. Nuth, A. Pope, A. Racoviteanu, P. Rastner, B. Raup, K. Scharrer, S. Steffen and S. Winsvold (2013): On the accuracy of glacier outlines derived from remote sensing data. <i>Annals of Glaciology</i>, 54 (63), 171-182</li> <li>• Paul, F., S.H. Winsvold, A. Kääb, T. Nagler and G. Schwaizer (2016): Glacier Remote Sensing Using Sentinel-2. Part II: Mapping Glacier Extents and Surface Facies, and Comparison to Landsat 8. <i>Remote Sensing</i>, 8(7), 575; doi:10.3390/rs8070575.</li> <li>• Zemp, M., Frey, H., Gärtner-Roer, I., Nussbaumer, S. U., Hoelzle, M., Paul, F., ... Vincent, C. (2015). Historically unprecedented global glacier decline in the early 21st century. <i>Journal of Glaciology</i>, 61(228), 745–762. <a href="http://doi.org/10.3189/2015JoG15J017">http://doi.org/10.3189/2015JoG15J017</a></li> </ul>										

## 8.2 Ice sheets and ice shelves

### 8.2.1 ECV Product: Grounding Line Location and Thickness

Name						Grounding Line Location and Thickness					
Definition		Location of the line (zone) where ice outflow to an ocean begins to float, and thickness of ice at that location									
Unit		Thickness in m, coordinates of location									
Note											
						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m		G	100							
			B								
			T	1000							
Vertical Resolution	N/A	2d coordinates of grounding line	G								
			B								
			T	10							
Temporal Resolution			G								
			B								
			T	1 year							
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	m	Position and thickness	G	1							
			B								
			T	10							
Stability	m	Position and thickness	G								
			B								
			T	1							
Standards and References											

### 8.2.2 ECV Product: Ice Volume Change

Name						Ice Volume Change					
Definition		Direct measurement of local mass changes or inferred mass change from combining measurements									
Unit		10km <sup>3</sup> /year									
Note											
						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	Size of grid cell	G								
			B								
			T	50							
Vertical Resolution	N/A	One value per point of Earth's surface	G								
			B								
			T								
Temporal Resolution		time	G	30 days							
			B								
			T	1 year							
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	km <sup>3</sup> /year	error of measured in-situ using the geodetic method and remotely sensed surface elevation.	G								
			B								
			T	10							
Stability	10km <sup>3</sup> /year	error of measured in-situ using the geodetic method and remotely sensed surface elevation.	G								
			B								
			T	1							
Standards and References											

### 8.2.3 ECV Product: Ice Velocity

Ice Velocity					
<b>Name</b>	Ice Velocity				
<b>Definition</b>	Surface-parallel vector of the surface ice flow				
<b>Unit</b>	m year <sup>-1</sup> – average speed in grid cell of surface ice flow				
<b>Note</b>					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	m	Grid cell size	G	50	Hvidberg et al (2021)
			B	100	Hvidberg et al (2021)
			T	1000	Hvidberg et al (2021)
Vertical Resolution	N/A	One value per point of Earth's surface	G		
			B		
			T		
Temporal Resolution		time	G	30 days	
			B		
			T	1 year	
Timeliness			G		
			B		
			T		
Required Measurement Uncertainty (2-sigma)	m year <sup>-1</sup>	error of measured in-situ using the geodetic method and remotely sensed surface elevation.	G	10	Hvidberg et al (2021)
			B	30	Hvidberg et al (2021)
			T	100	Hvidberg et al (2021)
Stability	ms <sup>-1</sup>	error of measured in-situ using the geodetic method and remotely sensed surface elevation.	G		
			B		
			T	10	
<b>Standards and References</b>	Hvidberg, C.S., et al., User Requirements Document for the Ice_Sheets_cci project of ESA's Climate Change Initiative, version 1.5, 03 Aug 2012. <a href="http://esa-icesheets-greenland-cci.org/index.php?q=webfm_send/19">http://esa-icesheets-greenland-cci.org/index.php?q=webfm_send/19</a>				

### 8.2.4 ECV Product: Surface Elevation Change

Name						Surface Elevation Change					
Definition		Local measurements of the height above a reference (geoid or ellipsoid) of the snow-air surface or uppermost firn layers									
Unit		Annual change in elevations above sea level measured in meters (m/year)									
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m	Spacing of measurements	G								
			B								
			T	100							
Vertical Resolution	N/A	One value per point of Earth's surface	G								
			B								
			T								
Temporal Resolution		time	G	30 days							
			B								
			T	1 year							
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	m a-1	error of measured in-situ using the geodetic method and remotely sensed surface elevation.	G								
			B								
			T	0.1							
Stability	m a-1	error of measured in-situ using the geodetic method and remotely sensed surface elevation.	G								
			B								
			T	0.01							
Standards and References											

## 8.3 Permafrost

### 8.3.1 ECV Product: Permafrost extent

Name						Permafrost extent					
Definition						Fraction of permafrost-underlain area within a grid cell's horizontal area. Permafrost is subsurface earth material that remains continuously at or below 0°C throughout at least two consecutive years, usually for extended time periods up to many millennia.					
Unit						fraction					
Note						The requirements for permafrost extent reflect the determination through models which use relevant satellite observations as input in the context of permafrost monitoring					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m	Size of grid cell	G	1	Expert survey results documented in Duchossois et al.( 2018) and in NRC (2014)						
			B	10	Expert survey results documented in NRC (2014)						
			T	100	Expert survey results documented in NRC (2014)						
Vertical Resolution			G								
			B								
			T								
Temporal Resolution	years		G	1	Expert survey results documented in Duchossois et al. (2018)						
			B								
			T	10	Expert survey results documented in Duchossois et al. (2018)						
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	%	Accuracy	G	95	Expert survey results documented in Duchossois et al. (2018)						
			B								
			T	85	Expert survey results documented in Duchossois et al. (2018)						
Stability			G								
			B								
			T								
Standards and References						<ul style="list-style-type: none"> <li>• Bartsch, Annett; Allard, Michel; Biskaborn, Boris Kolumban; Burba, George; Christiansen, Hanne H; Duguay, Claude R; Grosse, Guido; Günther, Frank; Heim, Birgit; Högström, Elin; Käab, Andreas; Keuper, Frida; Lanckman, Jean-Pierre; Lantuit, Hugues; Lauknes, Tom Rune; Leibman, Marina O; Liu, Lin; Morgenstern, Anne; Necsoiu, Marius; Overduin, Pier Paul; Pope, Allen; Sachs, Torsten; Séjourné, Antoine; Streletskiy, Dmitry A; Strozzi, Tazio; Ullmann, Tobias; Ullrich, Matthias S; Vieira, Goncalo; Widhalm, Barbara (2014): Requirements for monitoring of permafrost in polar regions - A community white paper in response to the WMO Polar Space Task Group (PSTG), Version 4, 2014-10-09., 20 pp, <a href="https://doi.pangaea.de/10013/epic.45648.d001">https://doi.pangaea.de/10013/epic.45648.d001</a></li> <li>• Bartsch, A.; Grosse, G.; Käab, A.; Westermann, S.; Strozzi, T.; Wiesmann, A.; Duguay, C.; Seifert, F. M.; Obu, J.; Goler, R. (2016): GlobPermafrost – How space-based earth observation supports understanding of permafrost. Proceedings of the ESA Living Planet Symposium, pp. 6. <a href="http://www.globpermafrost.info/cms/documents/publications/publication-results-of-the-user-survey-in-the-esa-special-publication-proceedings">http://www.globpermafrost.info/cms/documents/publications/publication-results-of-the-user-survey-in-the-esa-special-publication-proceedings</a></li> <li>• Bartsch, A., Matthes, H., Westermann, S., Heim, B., Pellet, C., Onacu, A., Kroisleitner, C., Strozzi, T. (2019): ESA CCI+ Permafrost User Requirements Document, v1.1 <a href="http://cci.esa.int/sites/default/files/CCI+_PERMA_URD_v1.1.pdf">http://cci.esa.int/sites/default/files/CCI+_PERMA_URD_v1.1.pdf</a></li> <li>• Duchossois G., P. Strobl, V. Toumazou, S. Antunes, A. Bartsch, T. Diehl, F. Dinessen, P. Eriksson, G. Garric, M-N. Houssais, M. Jindrova, J. Muñoz-Sabater, T. Nagler, O. Nordbeck, User Requirements for a Copernicus Polar Mission - Phase 1 Report, EUR , Publications Office of the European Union, 29144 ENLuxembourg, 2018, ISBN 978-92-79-80961-3, doi:10.2760/22832, JRC111067 <a href="https://publications.jrc.ec.europa.eu/repository/handle/JRC111067">https://publications.jrc.ec.europa.eu/repository/handle/JRC111067</a></li> <li>• National Research Council (2014). Opportunities to Use Remote Sensing in Understanding Permafrost and Related Ecological Characteristics: Report of a Workshop. Washington, DC: The National Academies Press. <a href="https://doi.org/10.17226/18711">https://doi.org/10.17226/18711</a>.</li> </ul>					

### 8.3.2 ECV Product: Permafrost Temperature (= PT)

Name		Permafrost Temperature (PT)			
Definition	Permafrost is subsurface earth material that remains continuously at or below 0°C throughout at least two consecutive years, usually for extended time periods up to many millennia. Product definition: Ground temperatures measured at specified depths along profiles.				
Unit	°C				
Note	Measurements made in boreholes, and usually presented as temperature profiles. Active layer = surface layer that thaws/freezes every year ZAA = Zero annual amplitude, maximum penetration depth of seasonal variations				
Requirements					
Item needed	Unit	Metric	[1] Value	Derivation, References and Standards	
Horizontal Resolution	N/A	Spatial distribution of boreholes	G	Regular spacing	It is necessary to fill the spatial gaps in order to calibrate/compare with remote sensing products and climate modeling results.
			B	Transects	Longitudinal and latitudinal transects allow the assessment of gradients.
			B	Various settings	Various terrain with different ground/soil conditions (including varying moisture and ice content, thermal properties) and topoclimatic/microclimate conditions (e.g. vegetation, snow cover, slope, aspect) In mountain permafrost, various geomorphological and topo-climatic settings: rock-glaciers, rock walls, in various aspects. Allows for comparison of different reaction to climate change.
			T	Characterization of bioclimate zones	Boreholes in continuous, discontinuous, and sporadic permafrost areas. In discontinuous/sporadic permafrost, boreholes must be located in permafrost affected zones. Some boreholes in non-permafrost within permafrost areas can be useful for comparison, model comparison and for understanding evolution of regional permafrost conditions. Location of boreholes is strongly dependent on accessibility of borehole sites.
Vertical Resolution	N/A	Borehole depth, defined according to characteristic permafrost layers	G	Deeper than ZAA	Allows assessment of mid- to long term trends.
			B	Down to ZAA	Allows measurement of the full seasonal variations, and assessment of interannual trend.
			T	Below permafrost table	Allows calculation of active layer depth and measurement of the temperature of the uppermost permafrost at the permafrost table.
	m	Sensor spacing along borehole for continuous monitoring / measuring interval for manual measurement	G	Above ZAA 0.2 to 0.5	Spacing typically increases with depth. Actual spacing has to be adapted to local conditions and should be higher on boundary values (active layer/permafrost, ZAA), to allow an accurate interpolation.
			B		
			T	Above ZAA: 0.5 to 5	
			G	Below ZAA: 5 to 10	
Temporal Resolution		Sampling interval for continuous monitoring / periodicity for manual measurement. Depends on depth, must be more frequent in active layer than below ZAA	G	Active layer: 1h	Only useful in topmost layers, affected by diurnal variations.
			B	Active layer: 1d	Assessment of rapid changes due for instance to water infiltration.
			T	Active layer: 1 month	Sites measured only once a year can not be used for active layer monitoring
			G	Down to ZAA: 1d	Assessment of rapid variations in terrain with high thermal conductivity.
			B	Down to ZAA: 1 month	Assessment of seasonal variations.
			T	Down to ZAA: 1 year	Sites with manual measurement are measured only once a year.
			G	Below ZAA: 1 month	Allows detection of extreme seasonal variations.
			B	Below ZAA: 1 year	Sites with manual measurement are measured only once a year.
			T	Below ZAA: 5 years	Sufficient for mid- to long-term trend.



<b>Timeliness</b>	y		G	Weekly /real time	Timely reporting, fast intervention in case of problems where possible reduces the risk of large data gaps
			B	1 year	Most site measurements are retrieved only once a year
			T	5 years	Some site measurements are not retrieved every year
<b>Required Measurement Uncertainty (2-sigma)</b>	°C	Sensor uncertainty	G	0.01	Useful for finer definition of freeze/thaw dates
			B	0.1	Mean annual trends are often less than 0.1 °C. Reachable with high resolution sensors.
			T	0.2	Reachable with most standard sensors.
<b>Stability</b>	°C	Sensor drift over reference period. Assumed drift value of commonly used sensors. Sensor drift correction needs recalibration of sensors	G	0.01	Not realistic?
			B	0.05	Should be reached in order to maintain drift below trend.
			T	0.1	Commonly accepted value based on experience. Calibration of sensor probe is possible in case of manual measurement. It is often impossible for fixed sensor chains, that additionally can be blocked in the borehole due to e.g., shearing. Drift can be minimized by 3 or 4 wire mounting. In situ calibration/correction is possible for sub-surface sensors using "zero curtain".
<b>Standards and References</b>					

### 8.3.3 ECV Product: Active Layer Thickness (= ALT)

Name						Active Layer Thickness (ALT)					
Definition		The surface layer of the ground, subject to annual thawing and freezing in areas underlain by permafrost. Thickness of seasonally thawed soils measured in (cm), surface displacements measured in (cm). surface subsidence.									
Unit		cm									
Note		There are three established methods for measuring ALT: mechanical probing, frost tubes and temperature interpolation (with the assumption that 0°C = freeze point). In all three cases, the result is a depth/thickness value expressed in cm.									
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m	Spatial distribution of sites	G	Regular spacing	It is necessary to fill gaps in order to calibrate and compare with remote sensing products and climate modeling results						
			B	Transects							
			T	sufficient sites to characterize each bioclimatic subzone							
Vertical Resolution	cm	Spacing of sensors	G	2	Vertical resolution of ground temperature sensor spacing for the interpolation						
			B	10							
			T	20							
Temporal Resolution			G	1 year, at end of thawing period	ALT is an annual value, which is measured once a year at the end of the thawing period. In case of continuous measurement (borehole data), ALT is defined at time of maximal penetration of above 0°C temperature.						
			B								
			T	1 year, at end of thawing period							
Timeliness			G	1 year	ALT is measured and provided once per year.						
			B								
			T	1 year							
Required Measurement Uncertainty (2-sigma)	cm	mechanical probing penetration uncertainty / sensor uncertainty	G	1/5	Mechanical probing/frost tubes/ temperature interpolation from boreholes.						
			B								
			T	2/15							
Stability	cm	Stability = bias due to surface subsidence in case of ice loss in ice-rich permafrost. Needs to be corrected in order to get the true thaw depth. Thaw depth = active layer thickness + surface subsidence since previous year	G	1	In ice-rich terrain subject to thaw subsidence, monitoring of vertical movements by frost heave in winter and subsidence in summer are of critical importance. Field measurements may involve direct measurement towards borehole tube, optical survey or differential GPS technology.						
			B	5							
			T	10							
Standards and References	<ul style="list-style-type: none"> <li>Smith, Sharon and Brown, Jerry (2009) Assessment of the status of the development of the standards for the Terrestrial Essential Climate Variables - T7 - Permafrost and seasonally frozen ground.</li> </ul>										

- Streletskiy, Dmitry and Biskaborn, Boris and Smith, Sharon L. and Noetzli, Jeannette and Vieira, Gonçalo and Schoeneich, Philippe (2017) GTN-P - Strategy and Implementation Plan 2016-2020. Technical Report. Global Terrestrial Network for Permafrost.

### 8.3.4 ECV Product: Rock Glacier Velocity [=RGV]

Name		Rock Glacier Velocity (RGV)			
Definition		Global dataset of surface velocity time series measured/computed on single rock glacier units			
Unit		m/yr			
Note		<p>RGV can be measured/computed from terrestrial survey (e.g. repeated GNSS field campaigns, permanent GNSS stations) or remote sensing based approaches (e.g. InSAR, satellite-/air-/UAV-borne photogrammetry). The velocity values can be derived either from an annualized displacement measurement or from an annualized displacement computed from position measurements. RGV is defined for a single rock glacier unit that is expressed geomorphologically according to standards. Time series must be distinguished if they come from different units, even in a unique rock glacier system. Several time series can be measured/computed on the same rock glacier unit when derived from different methodologies.</p> <p>Rock glacier characteristics must be described according to the inventorying baseline concepts (Technical definition and standardized attributes of rock glaciers). In particular, the spatial connection to the upslope unit (e.g. connected to a glacier or not) leads to a specific evolution of rock glacier velocities and has to be documented.</p>			
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution		Spatial distribution of selected rock glaciers	G	Regional coverage	At least 30% of the active talus-connected and/or debris-mantled slope-connected rock glaciers should be selected in a region, which is a part of a mountain range, in order to represent its climatic context. Only possible with remote sensing approaches.
			B	Multiple sites in a defined regional context	Allows the definition of a regional trend.
			T	Isolated site	Continuous time series produced either from in situ measurements or remotely sensed measurements.
Horizontal Resolution (2)		Spatial resolution of the measurement  One value per selected rock glacier unit	G	Flow field	Velocity is computed/measured by aggregation over a target area on a rock glacier unit. The aggregation procedure and the target area should be consistent over time. Allows the best representation of the effective movement over the rock glacier unit.
			B	Few discrete points	Velocity is computed/measured as an aggregation of few measurement points over a target area on a rock glacier unit. The aggregation procedure and the target area should be consistent over time. Allows a better representation of the effective movement over the rock glacier unit.
			T	Velocity value at a point	Velocity is computed/measured on a single point. The location should be consistent over time and be spatially representative of the rock glacier unit it is taking part (i.e. located within a recognized moving area).
Vertical resolution		Not relevant	G		
			B		
			T		
Temporal Resolution	yr	Frequency and Observation time window	G	Frequency = 1 yr Observation time window = 1 yr	Measured/computed once a year. The observation time window is 1 year and consistent over time.
			B	Frequency = 1 yr Observation time window < 1 yr	Measured/computed once a year. The observation time window is shorter than 1 year (e.g. observation on summer period only). It should not be shorter than 1 month and must be consistent over time. Allows a better representation of the annual behavior.
			T	Frequency = 2-5 yrs Observation time window > 1 yr	Frequency limited by an observation time window of 2-5 yrs. This time period corresponds to the common periodicity for aerial image coverages, and can be adapted according to regional/national specificities. Longer intervals are admissible for optical images, as well as for reconstructions from archives.

Timeline ss			G	3 months	Minimum time needed for data processing.
			B		
			T	1 year	
Require d Measure ment Uncertai nty (2- sigma)	%	Relative error of the velocity data	G	5%	Allowed relative error of the velocity data to produce a reliable analysis of long-term temporal changes in rock glacier velocity (RGV). The technique must be chosen in accordance with the absolute value measured/computed on the observed rock glacier and the goal relative error of the velocity data.
			B	10%	
			T	20%	Maximal allowed relative error of the velocity data to produce a reliable analysis of long-term temporal changes in rock glacier velocity (RGV). The technique must be chosen in accordance with the absolute value measured/computed on the observed rock glacier and the target relative error of the velocity data.
Stability		Overlapping	G	With overlap several yrs	Observation time window, horizontal resolution of the velocity value and methodologies/procedures used to measure/compute velocity value for a single time series must be consistent over time. If one of these elements is changing, two time series must be derived for the selected rock glacier unit. If these two time series have an overlap of several years ensuring consistency, they can be merged into a single time series. The merging procedure must be documented.
			B	With overlap 1 yr	Observation time window, horizontal resolution of the velocity value and methodologies/procedures used to measure/compute velocity value for a single time series must be consistent over time. If one of these elements is changing, two time series must be derived for the selected rock glacier unit. If these two time series have an overlap of 1 year ensuring consistency, they can be merged into a single time series. The merging procedure must be documented.
			T	Without overlap	Observation time window, horizontal resolution of the velocity value and methodologies/procedures used to measure/compute velocity value for a single time series must be consistent over time. If one of this element is changing without overlap, two time series must be derived for the selected rock glacier unit.
Standar ds and Referen ces	<p>IPA Action Group Rock glaciers inventories and kinematics (<a href="https://ipa.arcticportal.org/activities/action-groups">https://ipa.arcticportal.org/activities/action-groups</a>)</p> <p>Standards and definitions:</p> <ul style="list-style-type: none"> <li>- Technical definition and standardized attributes of rock glacier (<a href="https://bigweb.unifr.ch/Science/Geosciences/Geomorphology/Pub/Website/IPA/CurrentVersion/Current_Baseline_Concepts_Inventorizing_Rock_Glaciers.pdf">https://bigweb.unifr.ch/Science/Geosciences/Geomorphology/Pub/Website/IPA/CurrentVersion/Current_Baseline_Concepts_Inventorizing_Rock_Glaciers.pdf</a>)</li> <li>- Rock glacier velocity (<a href="https://bigweb.unifr.ch/Science/Geosciences/Geomorphology/Pub/Website/IPA/CurrentVersion/Current_RockGlacierVelocity.pdf">https://bigweb.unifr.ch/Science/Geosciences/Geomorphology/Pub/Website/IPA/CurrentVersion/Current_RockGlacierVelocity.pdf</a>)</li> </ul>				

## 8.4 Snow

### 8.4.1 ECV Product: Snow-water equivalent

Name						Snow-water equivalent					
Definition						Water equivalent of snow cover: the Vertical depth of the water that would be obtained if the snow cover melted completely, which equates to the snow-cover mass per unit area.					
Unit						kg m <sup>-2</sup> – average over grid cell					
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	Size of grid cell	G	1	In complex terrain The resolution 1km refers to the homogeneous snow coverage in the flat field and high local variation in the mountain areas.						
			B	5							
			T	25							
Vertical Resolution	N/A	N/A	G								
			B								
			T								
Temporal Resolution	hours	time	G	6	The frequency "Daily" refers to the rapid changing cycle retrieved by satellite observation.						
			B	24							
			T	48							
Timeliness	day		G	3 hours							
			B	1							
			T	10							
Required Measurement Uncertainty (2-sigma)	mm		G	30 (For mountain areas 20%)	The Required Measurement Uncertainty (2-sigma) "10 mm" refers to the complexity of snow cover edge						
			B	40 (For mountain areas 30%)							
			T	50 (For mountain areas 40%)							
Stability	mm		G								
			B								
			T	10							The stability is recommended to be better than "10 mm".
Standards and References	<ul style="list-style-type: none"> <li>• Frei, A., Tedesco, M., Lee, S., Foster, J., Hall, D. K., Kelly, R. and Robinson, D. A. (2012): A review of global satellite-derived snow products, <i>Advances in Space Research</i>, 50, 1007–1029.</li> <li>• Goodison, B. and Walker, A. (1994): Canadian development and use of snow cover information from passive microwave satellite data, B. Choudhury et al. (ed), <i>Passive Microwave Remote Sensing of Land-Atmosphere Interaction</i>, Utrecht: VSP BV, 245-262.</li> <li>• Robinson, D.A. (2013): Climate Data Record Program (CDRP): Climate Algorithm Theoretical Basis Document (C-ATBD) Northern Hemisphere Snow Cover Extent, CDRPATBD-0156. Asheville, North Carolina, USA 28 pp.</li> <li>• Sturm, M., Taras, B., Liston, G. E., Derksen, C., Jonas, T. and Lea, J. (2010): Estimating Snow Water Equivalent Using Snow Depth Data and Climate Classes. <i>Jour. Hydromet.</i> 11, 1380-1394.</li> </ul>										

### 8.4.2 ECV Product: Snow Depth

Name						Snow Depth					
Definition		Snow thickness is the perpendicular distance between snowpack surface and the underlying surface (ground, sea ice, lake ice, ice sheets, on ice shelves, glaciers, etc.									
Unit		m – average over a grid cell									
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	Size of grid cell	G	1	In complex terrain						
			B	5							
			T	25	The resolution 1km refers to the homogeneous snow coverage in the flat field and high local variation in the mountain areas.						
Vertical Resolution	mm	Depth of snow - the perpendicular distance between snowpack surface and the underlying ground	G								
			B								
			T								
Temporal Resolution	days	time	G	6							
			B	24							
			T	48	The frequency "Daily" refers to the rapid changing cycle retrieved by satellite observation.						
Timeliness			G	3 hours							
			B	1							
			T	10							
Required Measurement Uncertainty (2-sigma)	mm	2 Standard Deviations	G								
			B								
			T	1							
Stability	mm		G	1							
			B	5							
			T	25	The stability is recommended to be better than "10 mm".						
Standards and References	<ul style="list-style-type: none"> <li>• Frei, A., Tedesco, M., Lee, S., Foster, J., Hall, D. K., Kelly, R. and Robinson, D. A. (2012): A review of global satellite-derived snow products, <i>Advances in Space Research</i>, 50, 1007–1029.</li> <li>• Goodison, B. and Walker, A. (1994): Canadian development and use of snow cover information from passive microwave satellite data, B. Choudhury et al. (ed), <i>Passive Microwave Remote Sensing of Land-Atmosphere Interaction</i>, Utrecht: VSP BV, 245-262.</li> <li>• Robinson, D.A. (2013): Climate Data Record Program (CDRP): Climate Algorithm Theoretical Basis Document (C-ATBD) Northern Hemisphere Snow Cover Extent, CDRPATBD-0156. Asheville, North Carolina, USA 28 pp.</li> <li>• Sturm, M., Taras, B., Liston, G. E., Derksen, C., Jonas, T. and Lea, J. (2010): Estimating Snow Water Equivalent Using Snow Depth Data and Climate Classes. <i>Jour. Hydromet.</i> 11, 1380-1394.</li> </ul>										

### 8.4.3 ECV Product: Area Covered by Snow

Name						Area Covered by Snow					
Definition		Snow cover refers to the % coverage solid surface (ground, ice sea ice, lake ice, glaciers etc) in open areas and on top of vegetation cover that is present, such as forest canopies covered by snow at a given time. Sometimes called "viewable snow".									
Unit		m <sup>2</sup> – average over a grid cell									
Note		Area covered by snow is observed in-situ and satellite observation (Robinson, 2013; Frei et al., 2012). The visible satellite identifies the snow cover with few millimeters of snow depth. The microwave radiometer can detect at first from few centimeters of snow depth.									
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m	Size of grid cell	G	1	The resolution 1km refers to the homogeneous snow coverage in the flat field and high local variation in the mountain areas.						
			B	5							
			T	25							
Vertical Resolution			G								
			B								
			T								
Temporal Resolution	days	Frequency of measurement	G	6	The frequency "Daily" refers to the rapid changing cycle retrieved by satellite observation.						
			B	24							
			T	48							
Timeliness			G	3 hours							
			B	1							
			T	10							
Required Measurement Uncertainty (2-sigma)	%	2 Standard Deviations	G		The Required Measurement Uncertainty (2-sigma) "5 %, local accuracy for 1/3 of 100m and 1km" refers to the complexity of snow cover edge.						
			B								
			T	5 %, local accuracy for 1/3 of 100m and 1km							
Stability			G	Missing							
			B								
			T	4%							
Standards and References		<ul style="list-style-type: none"> <li>Frei, A., Tedesco, M., Lee, S., Foster, J., Hall, D. K., Kelly, R. and Robinson, D. A. (2012): A review of global satellite-derived snow products, <i>Advances in Space Research</i>, 50, 1007–1029.</li> <li>Goodison, B. and Walker, A. (1994): Canadian development and use of snow cover information from passive microwave satellite data, B. Choudhury et al. (ed), <i>Passive Microwave Remote Sensing of Land-Atmosphere Interaction</i>, Utrecht: VSP BV, 245-262.</li> <li>Robinson, D.A. (2013): Climate Data Record Program (CDRP): Climate Algorithm Theoretical Basis Document (C-ATBD) Northern Hemisphere Snow Cover Extent, CDRPATBD-0156. Asheville, North Carolina, USA 28 pp.</li> <li>Sturm, M., Taras, B., Liston, G. E., Derksen, C., Jonas, T. and Lea, J. (2010): Estimating Snow Water Equivalent Using Snow Depth Data and Climate Classes. <i>Jour. Hydromet.</i> 11, 1380-1394.</li> </ul>									



## 9. BIOSPHERE

### 9.1 Above-ground biomass

#### 9.1.1 ECV Product: Above-ground biomass

Name						Above-ground biomass					
Definition		Above-ground biomass is defined as the mass of live and/or dead organic matter in terrestrial vegetation									
Unit		Mass of dry weight in metric tons									
Note		Definition can vary for different observations/products in terms including live and/or dead biomass, or for which vegetation compartments (woody, branches, and leaves). There are differences in what different satellite and in-situ observations actually measure. A clear definition needs to be provided with each measurement/product, and consistency is to be ensured, and ECV products might include flexibility in information to respond to different definition requirements (i.e. including different estimates for different compartments).									
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	M	Pixel-size	G	10-100	This resolution reflects the need to have biomass data at the scale of human-induced disturbance. Suitable resolution can vary by ecozone; biomass is a rapidly varying quantity in space and the variance when moving to more detailed spatial resolutions is getting enormous and very hard to be captured efficiently by varying observation sources; especially for natural and tropical forests. Current understanding practices suggest a horizontal resolution of 0.25 ha (50x50 m) outside the (sub-)tropics and a horizontal resolution of 1 ha (100x100 m) in the tropics for global products. In specific regions of interest and areas of active (forest/land) change higher resolution data can be helpful. Higher quality regional biomass maps can be used for the calibration and validation of global products.						
			B	100-1000	This resolution is suitable for most regional vegetation and carbon modeling and assessing the impact of climate extremes. Deriving biomass estimates at resolutions coarser than the original one (i.e. from 10-100 m) can reduce uncertainties and provide more robust data; while reducing the spatial detail.						
			T	> 1000	This resolution is suitable for global vegetation, carbon and climate models. Deriving biomass estimates at resolutions coarser than the original one (i.e. from 10-100 m) can reduce uncertainties and provide more robust data; while reducing the spatial detail.						
Vertical Resolution	N/A		G		Set to NA since ECV products provide estimates as total over a certain area without further vertical discrimination. There is however evolving products on tree/vegetation height and structure that are very related to biomass and could eventually be considered as a "third" dimension for biomass ECV products.						
			B								
			T								
Temporal Resolution	Years	Changes in biomass stocks (t/ha) over time (i.e. per year) are important to assess forest carbon gains and losses	G	Intra-annual	Biomass data more detailed than annual time steps are of value for assessing and modeling the impact of disturbances such as fires and forest degradation, and for seasonal variability in biomass productivity. There is also interest for more near-real time updates and estimates of forest biomass changes for (local) enforcement and accounting applications.						
			B	1-2 years	Annual and bi-annual time steps are used by many models and carbon accounting applications requiring biomass data.						
			T	5-10 yearly	One time is the minimum requirement but should be of high quality/low uncertainty. Temporal sampling increases are need to track changes and for long-term biomass trends information every 5-10 years is suitable.						
Timeliness	Years	The speed of delivery of biomass data determines their	G	Monthly-annual	Ideally, biomass measurements become available soon after the acquisition of the data for regular updating in regional hotspots, in case of major disturbances and climate extremes etc.. Speed of delivery of biomass information might come at the risk that full quality assurance and independent validation cannot be						

		usefulness for regular reporting, updating and enforcement applications			completed in near-real time as well.
			B	Annual-5 years	Global biomass measurements become available at least one (to a few) year(s) after the acquisition of the data and quality processing and ECV product derivation and validation, as well as long-term consistency is to be ensured.
			T	Regular reprocessing of historical records	Model applications require long-term consistent biomass datasets that should take advantage of the whole historical data record. Providing improved and reprocessed historical data records consistent with the recent higher quality ECV estimates should be provided on a regular basis.
Required Measurement Uncertainty (2-sigma)	% (for relative) and tons (for absolute), for different biomass classes/ranges	Relative and absolute bias and confidence interval or RMSE, overall and by biomass class/range derived from using reference data of higher quality	G	10%	RMSE alone is not a strong indicator of uncertainty as it mixes systematic deviation (also referred to as bias, bias being the term used here) and precision. Bias is often the most significant error and varies among various biomass ranges. Ideally a full error distribution as a function of biomass should be provided but can hardly be achieved in practice. As minimum, a comparison of the ECV product with independent (in-situ) reference data should provide uncertainty related to bias and precision among multiple biomass class/ranges.
			B	20%	RMSE alone is not a strong indicator of uncertainty as it mixes systematic deviation (also referred to as bias, bias being the term used here) and precision. Bias is often the most significant error and varies among various biomass ranges. Ideally a full error distribution as a function of biomass should be provided but can hardly be achieved in practice. As minimum, a comparison of the ECV product with independent (in-situ) reference data should provide uncertainty related to bias and precision among multiple biomass class/ranges.
			T	30%	RMSE alone is not a strong indicator of uncertainty as it mixes systematic deviation (also referred to as bias, bias being the term used here) and precision. Bias is often the most significant error and varies among various biomass ranges. Ideally a full error distribution as a function of biomass should be provided but can hardly be achieved in practice. As minimum, a comparison of the ECV product with independent (in-situ) reference data should provide uncertainty related to bias and precision among multiple biomass class/ranges.
Stability	% (for relative) and tons (for absolute), for different biomass classes/ranges	Relative and absolute bias and confidence interval or RMSE, overall and by biomass class/range derived from using multi-date reference data of higher quality	G	5%	As for uncertainty, stability should be assessed using both relative and absolute bias and RMSE. The stability can be assessed by multi-date independent validation/uncertainty assessments. The stability requirements are tighter that for overall uncertainty since the aim for multi-date ECV data is to provide information on biomass changes.
			B	10%	As for uncertainty, stability should be assessed using both relative and absolute bias and RMSE. The stability can be assessed by multi-date independent validation/uncertainty assessments. The stability requirements are tighter that for overall uncertainty since the aim for multi-date ECV data is to provide information on biomass changes.
			T	20%	As for uncertainty, stability should be assessed using both relative and absolute bias and RMSE. The stability can be assessed by multi-date independent validation/uncertainty assessments. The stability requirements are tighter that for overall uncertainty since the aim for multi-date ECV data is to provide information on biomass changes.
Standards and References					

## 9.2 Albedo

### 9.2.1 ECV Product: Spectral and Broadband (visible, near infrared and shortwave) DH & BH with associated spectral Bidirectional Reflectance Distribution Function (BRDF) parameters (required to derived albedo from reflectances).

<b>Name</b>	Spectral and Broadband (visible, near infrared and shortwave) DH & BH with associated spectral Bidirectional Reflectance Distribution Function (BRDF) parameters (required to derived albedo from reflectances).				
<b>Definition</b>	The land surface albedo is the ratio of the radiant flux reflected from Earth's surface to the incident flux. Each spectral/broadband value depends on natural variations and is highly variable in space and time as a result of terrestrial properties changes, and with illumination conditions.				
<b>Unit</b>	N/A				
<b>Note</b>	LENGTH OF RECORD: Threshold: 20 years; Target: > 40 years				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	m		G	10	Due to the heterogeneous nature of terrestrial surfaces, having surface albedo at such scale will increase accuracy for further assimilation of local/regional climate model.
			B		
			T	250	
<b>Vertical Resolution</b>	N/A		G		
			B		
			T		
<b>Temporal Resolution</b>	days		G	1	In order to be adequate in climate change services. Multi-angular instruments (including geostationary) and/or accumulation of daily data for BRDF parameters retrieval.
			B		
			T	10	
<b>Timelines</b>	days		G	1	In order to be adequate in climate change services.
			B		
			T	5	
<b>Required Measurement Uncertainty (2-sigma)</b>		One standard deviation or error covariance matrix, with associated PDF shape (functional form of estimated error distribution for the term).	G	3% for values higher than 0.05; 0.0015 for smaller values.	"A change of 1% to the Earth's albedo has a radiative effect of 3.4 W/m <sup>2</sup> " Over snow-free and snow-covered land, climate, biogeochemical, hydrological, and weather forecast models require this uncertainty.
			B		
			T	5% for values higher than 0.05; 0.0025 for smaller values.	
<b>Stability</b>	Rate of change of surface albedo over the available time period (per decade)	A factor of uncertainties to demonstrate that the 'error' of the product remains constant over the period, typically a decade or	G	< 1 %	'The required stability is some fraction of the expected signal' (see Ohring, et. al. 2005. <a href="https://journals.ametsoc.org/doi/pdf/10.1175/BAMS-86-9-1303">https://journals.ametsoc.org/doi/pdf/10.1175/BAMS-86-9-1303</a> ). "
			B		
			T	< 1.5 %	

		more (see background information).			
<b>Standards and References</b>	(Boussetta et al., 2015): Boussetta S., Balsamo G., Dutra E., Beljaars A., Albergel C. (2015) Assimilation of surface albedo and vegetation states from satellite observations and their impact on numerical weather prediction, Remote Sensing of Environment, pp. 111-126. DOI: 10.1016/j.rse.2015.03.009				

## 9.3 Evaporation from Land

### 9.3.1 ECV Product: Transpiration

Name						Transpiration					
<b>Definition</b>						The component of the total latent heat flux that corresponds to the vegetation consumption of water.					
<b>Unit</b>						W/m <sup>2</sup>					
<b>Note</b>						The requirements are analogous to those of the total latent heat flux, because the applications are the same. Several studies have shown, however, that the accuracy of the latent heat flux can still be adequate despite a higher uncertainty in the evaporation components (i.e. bare soil evaporation, transpiration and interception loss) – see e.g. Miralles et al. (2016), Talsma et al. (2018). For that reason, the uncertainty goals have been subjectively relaxed based on expert judgement.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	Size of grid cell	G	0.1	The length scales required to detect spatially heterogeneous responses, particularly if agricultural applications are intended (Fisher et al., 2017; Martens et al., 2018).						
			B	1	Scales needed to achieve a realistic partitioning of evaporation into different components considering land cover heterogeneity (Talsma et al., 2019; Miralles et al., 2016).						
			T	25	Current spatial resolution of global datasets (McCabe et al. 2016; Miralles et al., 2016), which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Vertical Resolution	N/A		G	N/A	N/A						
			B	N/A	N/A						
			T	N/A	N/A						
Temporal Resolution	hour	time	G	1	Water management and agricultural applications require to solve evaporation at timeframes associated with sub-daily irrigation decisions and scheduling (Fisher et al., 2017).						
			B	6	Intermediate compromise in which sub-daily processes controlling the evolution of the atmospheric boundary layer can be resolved (McCabe et al. 2016; Miralles et al., 2016).						
			T	24	Typical temporal resolution of current global datasets, which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Timeliness	Days		G	1	Water management and agricultural applications require data in near real-time (Fisher et al., 2017).						
			B	30	Scales needed to make transpiration data useful for early drought diagnostic or to improve seasonal weather forecasts (expert judgement).						
			T	365	Current latency for multiple global datasets, which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Required Measurement Uncertainty (2-sigma)	%	relative root mean square error	G	20	This will involve an improved differentiation of water use and water stress among different crops, species, and ecosystems, and will enable more efficient water management (Fisher et al., 2017).						
			B	40	Intermediate compromise in which datasets can become useful as drought diagnostic or as a water management asset (expert judgement).						
			T	50	Current level of relative error (Talsma et al., 2018); this level has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Stability	W m <sup>-2</sup> year <sup>-1</sup>		G	0.015	Approximately half of the current spread in the multi-datasets estimates of the global trend in evaporation (Zang et al., 2016).						
			B	–	–						
			T	0.03	Current estimates of the trend in the evaporation, but also the estimates of the spread in the estimates of these trends by different datasets (Zhang et al 2016).						
Standards and References	<ul style="list-style-type: none"> <li>Fisher, J. B., Melton, F., Middleton, E., Hain, C., Anderson, M., Allen, R., McCabe, M. F., Hook, S., Baldocchi, D., Townsend, P. A., Kilic, A., Tu, K., Miralles, D. D., Perret, J., Lagouarde, J.-P., Waliser, D., Purdy, A. J., French, A., Schimel, D., Famiglietti, J. S., Stephens, G. and Wood, E. F.: The future of evapotranspiration: Global requirements for ecosystem functioning, carbon and climate feedbacks, agricultural management, and water resources, <i>Water Resour. Res.</i>, 53(4), 2618–2626, doi:10.1002/2016WR020175, 2017.</li> <li>Martens, B., de Jeu, R., Verhoest, N., Schuurmans, H., Kleijer, J. and Miralles, D.: Towards Estimating Land Evaporation at Field Scales Using GLEAM, <i>Remote Sensing</i>, 10(11), 1720–25, doi:10.3390/rs10111720, 2018.</li> <li>McCabe, M. F., Ershadi, A., Jiménez, C., Miralles, D. G., Michel, D. and Wood, E. F.: The GEWEX</li> </ul>										

LandFlux project: evaluation of model evaporation using tower-based and globally gridded forcing data, *Geosci. Model Dev.*, 9(1), 283–305, doi:10.5194/gmd-9-283-2016, 2016.

- Miralles, D. G., Jiménez, C., Jung, M., Michel, D., Ershadi, A., McCabe, M. F., Hirschi, M., Martens, B., Dolman, A. J., Fisher, J. B., Mu, Q., Seneviratne, S. I., Wood, E. F. and Fernández-Prieto, D.: The WACMOS-ET project – Part 2: Evaluation of global terrestrial evaporation data sets, *Hydrol. Earth Syst. Sci.*, 20(2), 823–842, doi:10.5194/hess-20-823-2016, 2016.
- Miralles, D. G., Gentile, P., Seneviratne, S. I. and Teuling, A. J.: Land-atmospheric feedbacks during droughts and heatwaves: state of the science and current challenges, *Ann. N.Y. Acad. Sci.*, 8, 469–17, doi:10.1111/nyas.13912, 2019.
- Talsma, C., Good, S., Miralles, D., Fisher, J., Martens, B., Jiménez, C. and Purdy, A.: Sensitivity of Evapotranspiration Components in Remote Sensing-Based Models, *Remote Sensing*, 10(10), 1601–28, doi:10.3390/rs10101601, 2018.
- Zhang, Y., Peña-Arancibia, J. L., Mcvicar, T. R., Chiew, F. H. S., Vaze, J., Liu, C., Lu, X., Zheng, H., Wang, Y., Liu, Y. Y., Miralles, D. G. and Pan, M.: Multi-decadal trends in global terrestrial evapotranspiration and its components, *Sci. Rep.*, 1–12, doi:10.1038/srep19124, 2016.

### 9.3.2 ECV Product: Interception Loss

Name						Interception Loss					
Definition		The component of the total latent heat flux that corresponds to the precipitation that is intercepted by vegetation and evaporated directly.									
Unit		W/m <sup>2</sup>									
Note		The requirements are analogous to those of the total latent heat flux, because the applications are the same. Several studies have shown, however, that the accuracy of the latent heat flux can still be adequate despite a higher uncertainty in the evaporation components (i.e. bare soil evaporation, transpiration and interception loss) – see e.g. Miralles et al. (2016), Talsma et al. (2018). For that reason, the uncertainty goals have been subjectively relaxed based on expert judgement.									
Requirements						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	Size of grid cell	G	0.1	The length scales required to detect spatially heterogeneous responses, particularly if agricultural applications are intended (Fisher et al., 2017; Martens et al., 2018).						
			B	1	Scales needed to achieve a realistic partitioning of evaporation into different components considering land cover heterogeneity (Talsma et al., 2019; Miralles et al., 2016).						
			T	25	Current spatial resolution of global datasets (McCabe et al. 2016; Miralles et al., 2016), which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Vertical Resolution	N/A		G	N/A	N/A						
			B	N/A	N/A						
			T	N/A	N/A						
Temporal Resolution	hour	time	G	1	Water management and agricultural applications require to solve evaporation at timeframes associated with sub-daily irrigation decisions and scheduling (Fisher et al., 2017).						
			B	6	Intermediate compromise in which sub-daily processes controlling the evolution of the atmospheric boundary layer can be resolved (McCabe et al. 2016; Miralles et al., 2016).						
			T	24	Typical temporal resolution of current global datasets, which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Timeliness	Days		G	1	Water management and agricultural applications require data in near real-time (Fisher et al., 2017).						
			B	30	Scales needed to make interception loss needed to (e.g.) improve seasonal weather or hydrological forecasts (expert judgement).						
			T	365	Current latency for multiple global datasets, which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Required Measurement Uncertainty (2-sigma)	%	relative root mean square error	G	20	This will enable more efficient water management (Fisher et al., 2017).						
			B	30	Intermediate compromise in which datasets can become useful as a water management asset (expert judgement).						
			T	50	Current level of relative error (Talsma et al., 2018); this level has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Stability	W m <sup>-2</sup> year <sup>-1</sup>		G	0.015	Approximately half of the current spread in the multi-datasets estimates of the global trend in evaporation (Zang et al., 2016).						
			B	–	–						
			T	0.03	Current estimates of the trend in the evaporation, but also the estimates of the spread in the estimates of these trends by different datasets (Zhang et al 2016).						
Standards and References	<ul style="list-style-type: none"> <li>• Fisher, J. B., Melton, F., Middleton, E., Hain, C., Anderson, M., Allen, R., McCabe, M. F., Hook, S., Baldocchi, D., Townsend, P. A., Kilic, A., Tu, K., Miralles, D. D., Perret, J., Lagouarde, J.-P., Waliser, D., Purdy, A. J., French, A., Schimel, D., Famiglietti, J. S., Stephens, G. and Wood, E. F.: The future of evapotranspiration: Global requirements for ecosystem functioning, carbon and climate feedbacks, agricultural management, and water resources, <i>Water Resour. Res.</i>, 53(4), 2618–2626, doi:10.1002/2016WR020175, 2017.</li> <li>• Martens, B., de Jeu, R., Verhoest, N., Schuurmans, H., Kleijer, J. and Miralles, D.: Towards Estimating Land Evaporation at Field Scales Using GLEAM, <i>Remote Sensing</i>, 10(11), 1720–25, doi:10.3390/rs10111720, 2018.</li> <li>• McCabe, M. F., Ershadi, A., Jiménez, C., Miralles, D. G., Michel, D. and Wood, E. F.: The GEWEX LandFlux project: evaluation of model evaporation using tower-based and globally gridded forcing data, <i>Geosci. Model Dev.</i>, 9(1), 283–305, doi:10.5194/gmd-9-283-2016, 2016.</li> <li>• Miralles, D. G., Jiménez, C., Jung, M., Michel, D., Ershadi, A., McCabe, M. F., Hirschi, M., Martens, B., Dolman, A. J., Fisher, J. B., Mu, Q., Seneviratne, S. I., Wood, E. F. and Fernández-Prieto, D.: The</li> </ul>										

WACMOS-ET project – Part 2: Evaluation of global terrestrial evaporation data sets, *Hydrol. Earth Syst. Sci.*, 20(2), 823–842, doi:10.5194/hess-20-823-2016, 2016.

- Miralles, D. G., Gentile, P., Seneviratne, S. I. and Teuling, A. J.: Land-atmospheric feedbacks during droughts and heatwaves: state of the science and current challenges, *Ann. N.Y. Acad. Sci.*, 8, 469–17, doi:10.1111/nyas.13912, 2019.
- Talsma, C., Good, S., Miralles, D., Fisher, J., Martens, B., Jiménez, C. and Purdy, A.: Sensitivity of Evapotranspiration Components in Remote Sensing-Based Models, *Remote Sensing*, 10(10), 1601–28, doi:10.3390/rs10101601, 2018.
- Zhang, Y., Peña-Arancibia, J. L., Mcvicar, T. R., Chiew, F. H. S., Vaze, J., Liu, C., Lu, X., Zheng, H., Wang, Y., Liu, Y. Y., Miralles, D. G. and Pan, M.: Multi-decadal trends in global terrestrial evapotranspiration and its components, *Sci. Rep.*, 1–12, doi:10.1038/srep19124, 2016.



### 9.3.3 ECV Product: Bare Soil Evaporation

Name						Bare Soil Evaporation					
Definition		The component of the total latent heat flux that corresponds to the direct evaporation of soil moisture into the atmosphere.									
Unit		W/m <sup>2</sup>									
Note		The requirements are analogous to those of the total latent heat flux, because the applications are the same. Several studies have shown, however, that the accuracy of the latent heat flux can still be adequate despite a higher uncertainty in the evaporation components (i.e. bare soil evaporation, transpiration and interception loss) – see e.g. Miralles et al. (2016), Talsma et al. (2018). For that reason, the uncertainty goals have been subjectively relaxed based on expert judgement.									
						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	Size of grid cell	G	0.1	The length scales required to detect spatially heterogeneous responses, particularly if agricultural applications are intended (Fisher et al., 2017; Martens et al., 2018).						
			B	1	Scales needed to achieve a realistic partitioning of evaporation into different components considering land cover heterogeneity (Talsma et al., 2019; Miralles et al., 2016).						
			T	25	Current spatial resolution of global datasets (McCabe et al. 2016; Miralles et al., 2016), which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Vertical Resolution	N/A		G	N/A	N/A						
			B	N/A	N/A						
			T	N/A	N/A						
Temporal Resolution	hour	time	G	1	Water management and agricultural applications require to solve evaporation at timeframes associated with sub-daily irrigation decisions and scheduling (Fisher et al., 2017).						
			B	6	Intermediate compromise in which sub-daily processes controlling the evolution of the atmospheric boundary layer can be resolved (McCabe et al. 2016; Miralles et al., 2016).						
			T	24	Typical temporal resolution of current global datasets, which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Timeliness	Days		G	1	Water management and agricultural applications require data in near real-time (Fisher et al., 2017).						
			B	30	Scales needed to make bare soil evaporation data useful for early drought diagnostic or to improve seasonal weather forecasts (expert judgement).						
			T	365	Current latency for multiple global datasets, which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Required Measurement Uncertainty (2-sigma)	%	relative root mean square error	G	20	This will enable more efficient water management (Fisher et al., 2017).						
			B	30	Intermediate compromise in which datasets can become useful as drought diagnostic or as a water management asset (expert judgement).						
			T	50	Current level of relative error (Talsma et al., 2018); this level has so far been deemed sufficient for climatological applications (Fisher et al., 2017).						
Stability	W m <sup>-2</sup> year <sup>-1</sup>		G	0.015	Approximately half of the current spread in the multi-datasets estimates of the global trend in evaporation (Zang et al., 2016).						
			B	–	–						
			T	0.03	Current estimates of the trend in the evaporation, but also the estimates of the spread in the estimates of these trends by different datasets (Zhang et al 2016).						
Standards and References		<ul style="list-style-type: none"> <li>Fisher, J. B., Melton, F., Middleton, E., Hain, C., Anderson, M., Allen, R., McCabe, M. F., Hook, S., Baldocchi, D., Townsend, P. A., Kilic, A., Tu, K., Miralles, D. D., Perret, J., Lagouarde, J.-P., Waliser, D., Purdy, A. J., French, A., Schimel, D., Famiglietti, J. S., Stephens, G. and Wood, E. F.: The future of evapotranspiration: Global requirements for ecosystem functioning, carbon and climate feedbacks, agricultural management, and water resources, <i>Water Resour. Res.</i>, 53(4), 2618–2626, doi:10.1002/2016WR020175, 2017.</li> <li>Martens, B., de Jeu, R., Verhoest, N., Schuurmans, H., Kleijer, J. and Miralles, D.: Towards Estimating Land Evaporation at Field Scales Using GLEAM, <i>Remote Sensing</i>, 10(11), 1720–25, doi: 10.3390/rs10111720, 2018.</li> <li>McCabe, M. F., Ershadi, A., Jiménez, C., Miralles, D. G., Michel, D. and Wood, E. F.: The GEWEX LandFlux project: evaluation of model evaporation using tower-based and globally gridded forcing data, <i>Geosci. Model Dev.</i>, 9(1), 283–305, doi:10.5194/gmd-9-283-2016, 2016.</li> </ul>									

- Miralles, D. G., Jiménez, C., Jung, M., Michel, D., Ershadi, A., McCabe, M. F., Hirschi, M., Martens, B., Dolman, A. J., Fisher, J. B., Mu, Q., Seneviratne, S. I., Wood, E. F. and Fernández-Prieto, D.: The WACMOS-ET project – Part 2: Evaluation of global terrestrial evaporation data sets, *Hydrol. Earth Syst. Sci.*, 20(2), 823–842, doi:10.5194/hess-20-823-2016, 2016.
- Miralles, D. G., Gentile, P., Seneviratne, S. I. and Teuling, A. J.: Land-atmospheric feedbacks during droughts and heatwaves: state of the science and current challenges, *Ann. N.Y. Acad. Sci.*, 8, 469–17, doi:10.1111/nyas.13912, 2019.
- Talsma, C., Good, S., Miralles, D., Fisher, J., Martens, B., Jiménez, C. and Purdy, A.: Sensitivity of Evapotranspiration Components in Remote Sensing-Based Models, *Remote Sensing*, 10(10), 1601–28, doi:10.3390/rs10101601, 2018.
- Zhang, Y., Peña-Arancibia, J. L., Mcvicar, T. R., Chiew, F. H. S., Vaze, J., Liu, C., Lu, X., Zheng, H., Wang, Y., Liu, Y. Y., Miralles, D. G. and Pan, M.: Multi-decadal trends in global terrestrial evapotranspiration and its components, *Sci. Rep.*, 1–12, doi:10.1038/srep19124, 2016.
-

### 9.3.4 ECV Product: Sensible Heat Flux

Name						Sensible Heat Flux					
Definition		The land surface (terrestrial) sensible heat flux represents the conduction of heat between the land surface into the atmosphere.									
Unit		W/m <sup>2</sup>									
Note		Current sensible heat flux datasets based on satellite data are often derived as a residual from the energy balance equation based on estimated latent heat fluxes. Due to their analogous use to that of latent heat fluxes by the climate and meteorology community, their user requirements are similar. However, given their lower immediate value for the agricultural and water management community, some differences in the targeted goals are considered.									
Item needed						Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	Size of grid cell	G	1	Scales needed to achieve a realistic estimation considering land cover heterogeneity that may be useful to determine the role of sensible heat fluxes during extreme events (Miralles et al., 2019). Current spatial resolution of global datasets, which has so far been deemed sufficient for climatological applications.						
			B	–							
			T	25							
Vertical Resolution	N/A		G	N/A	N/A						
			B	N/A	N/A						
			T	N/A	N/A						
Temporal Resolution	hour	time	G	1	Sub-daily processes are needed to represent the evolution of the atmospheric boundary layer during flash droughts or heatwaves (Miralles et al., 2019). Typical temporal resolution of current global datasets, which has so far been deemed sufficient for climatological applications.						
			B	–							
			T	24							
Timeliness	Days		G	1	Accurate forecasting of short-term droughts and heatwaves requires data in near real-time (Miralles et al., 2019). Scales needed to make sensible heat fluxes data useful for early drought diagnostic or to improve seasonal weather forecasts (expert judgement). Current latency for multiple global datasets, which has so far been deemed sufficient for climatological applications.						
			B	30							
			T	365							
Required Measurement Uncertainty (2-sigma)	%	relative root mean square error	G	10	This will involve an improved differentiation among ecosystems, and enable more efficient weather forecasts of extreme events (expert judgement). Intermediate compromise at which datasets can become useful as drought diagnostic (expert judgement). Current level of relative error that has so far been deemed sufficient for climatological applications.						
			B	20							
			T	40							
Stability	W m <sup>-2</sup> year <sup>-1</sup>		G	0.015	Due to the scarcity of studies of sensible heat flux trends (Siemann et al., 2018), we refer to the same stability thresholds as for latent heat fluxes (and in the same units). – –						
			B	–							
			T	0.03							
Standards and References	<ul style="list-style-type: none"> <li>Siemann, A. L., Chaney, N. and Wood, E. F.: Development and Validation of a Long-Term, Global, Terrestrial Sensible Heat Flux Dataset, <i>J. Climate</i>, 31(15), 6073–6095, doi:10.1175/JCLI-D-17-0732.1, 2018.</li> <li>Miralles, D. G., Gentine, P., Seneviratne, S. I. and Teuling, A. J.: Land-atmospheric feedbacks during droughts and heatwaves: state of the science and current challenges, <i>Ann. N.Y. Acad. Sci.</i>, 8, 469–17, doi:10.1111/nyas.13912, 2019.</li> </ul>										

### 9.3.5 ECV Product: Latent Heat Flux

Name		Latent Heat Flux				
Definition	The land surface (or terrestrial) latent heat flux is the energy flux associated with the evaporation occurring over land surfaces, and it may comprise three main sources or individual components: bare soil evaporation (direct evaporation of water from soils), interception loss (evaporation of water from wet canopies) and transpiration (plant water consumption), each of which are considered as sub-products.					
Unit	W/m <sup>2</sup>					
Note	–					
Requirements						
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards	
Horizontal Resolution	km	Size of grid cell	G	0.1	The length scales required to detect spatially heterogeneous responses, particularly if agricultural applications are intended (Fisher et al., 2017; Martens et al., 2018).	
			B	1	Scales needed to achieve a realistic partitioning of evaporation into different components considering land cover heterogeneity (Talsma et al., 2019; Miralles et al., 2016).	
			T	25	Current spatial resolution of global datasets (McCabe et al. 2016; Miralles et al., 2016), which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).	
Vertical Resolution	N/A		G	N/A	N/A	
			B	N/A	N/A	
			T	N/A	N/A	
Temporal Resolution	hour	time	G	1	Water management and agricultural applications require to solve evaporation at timeframes associated with sub-daily irrigation decisions and scheduling (Fisher et al., 2017).	
			B	6	Intermediate compromise in which sub-daily processes controlling the evolution of the atmospheric boundary layer can be resolved (McCabe et al. 2016; Miralles et al., 2016).	
			T	24	Typical temporal resolution of current global datasets, which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).	
Timeliness	Days		G	1	Water management and agricultural applications require data in near real-time (Fisher et al., 2017).	
			B	30	Scales needed to make evaporation data useful for early drought diagnostic or to improve seasonal weather forecasts (expert judgement).	
			T	365	Current latency for multiple global datasets, which has so far been deemed sufficient for climatological applications (Fisher et al., 2017).	
Required Measurement Uncertainty (2-sigma)	%	relative root mean square error	G	10	This will involve an improved differentiation of water use and water stress among different crops, species, and ecosystems, and will enable more efficient water management (Fisher et al., 2017).	
			B	20	Intermediate compromise in which datasets can become useful as drought diagnostic or as a water management asset (expert judgement).	
			T	40	Current level of relative error (McCabe et al. 2016); this level has so far been deemed sufficient for climatological applications (Fisher et al., 2017).	
Stability	W m <sup>-2</sup> year <sup>-1</sup>		G	0.015	Approximately half of the current spread in the multi-datasets estimates of the global trend in evaporation (Zang et al., 2016).	
			B	–	–	
			T	0.03	Current estimates of the trend in the evaporation, but also the estimates of the spread in the estimates of these trends by different datasets (Zhang et al 2016).	
Standards and References	<ul style="list-style-type: none"> <li>Fisher, J. B., Melton, F., Middleton, E., Hain, C., Anderson, M., Allen, R., McCabe, M. F., Hook, S., Baldocchi, D., Townsend, P. A., Kilic, A., Tu, K., Miralles, D. D., Perret, J., Lagouarde, J.-P., Waliser, D., Purdy, A. J., French, A., Schimel, D., Famiglietti, J. S., Stephens, G. and Wood, E. F.: The future of evapotranspiration: Global requirements for ecosystem functioning, carbon and climate feedbacks, agricultural management, and water resources, <i>Water Resour. Res.</i>, 53(4), 2618–2626, doi:10.1002/2016WR020175, 2017.</li> <li>Martens, B., de Jeu, R., Verhoest, N., Schuurmans, H., Kleijer, J. and Miralles, D.: Towards Estimating Land Evaporation at Field Scales Using GLEAM, <i>Remote Sensing</i>, 10(11), 1720–25, doi:10.3390/rs10111720, 2018.</li> <li>McCabe, M. F., Ershadi, A., Jiménez, C., Miralles, D. G., Michel, D. and Wood, E. F.: The GEWEX LandFlux project: evaluation of model evaporation using tower-based and globally gridded forcing</li> </ul>					

data, *Geosci. Model Dev.*, 9(1), 283–305, doi:10.5194/gmd-9-283-2016, 2016.

- Miralles, D. G., Jiménez, C., Jung, M., Michel, D., Ershadi, A., McCabe, M. F., Hirschi, M., Martens, B., Dolman, A. J., Fisher, J. B., Mu, Q., Seneviratne, S. I., Wood, E. F. and Fernández-Prieto, D.: The WACMOS-ET project – Part 2: Evaluation of global terrestrial evaporation data sets, *Hydrol. Earth Syst. Sci.*, 20(2), 823–842, doi:10.5194/hess-20-823-2016, 2016.
- Miralles, D. G., Gentile, P., Seneviratne, S. I. and Teuling, A. J.: Land-atmospheric feedbacks during droughts and heatwaves: state of the science and current challenges, *Ann. N.Y. Acad. Sci.*, 8, 469–17, doi:10.1111/nyas.13912, 2019.
- Talsma, C., Good, S., Miralles, D., Fisher, J., Martens, B., Jiménez, C. and Purdy, A.: Sensitivity of Evapotranspiration Components in Remote Sensing-Based Models, *Remote Sensing*, 10(10), 1601–28, doi:10.3390/rs10101601, 2018.
- Zhang, Y., Peña-Arancibia, J. L., Mcvicar, T. R., Chiew, F. H. S., Vaze, J., Liu, C., Lu, X., Zheng, H., Wang, Y., Liu, Y. Y., Miralles, D. G. and Pan, M.: Multi-decadal trends in global terrestrial evapotranspiration and its components, *Sci. Rep.*, 1–12, doi:10.1038/srep19124, 2016.

## 9.4 Fire

### 9.4.1 ECV Product: Burned area

Name		Burnt area				
Definition	Burned area means the area of burned vegetation. X_area means the horizontal area occupied by X within the grid cell. The extent of an individual grid cell is defined by the horizontal coordinates and any associated coordinate bounds or by a string valued auxiliary coordinate variable with a standard name of region.					
Unit	m <sup>2</sup>					
Note						
Requirements						
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards	
Horizontal Resolution	m	minimum mapping unit: length of the side of pixel	G	30	This resolution is mostly oriented towards regional studies, particularly in those regions where small fires (< 100 ha) have an important share in fire occurrence. The importance of small fires has been evidenced in recent papers (Roteta et al. 2019, among others)	
			B	250	Products based on higher resolution MODIS products have shown higher sensitivity to small fires, even though coarse resolution RS products still miss most small fires (Chuvieco et al. 2018)	
			T	25.000	Most climate modelers work at coarse resolution grids, 025 d is the most common. A recent review of users of RS BA products show that most of them work at this level of detail (Heil & Pettinari, 2021). A review of users of BA products can be found in Mouillot et al. 2014 and Chuvieco et al. 2019	
Vertical Resolution	N/A		G			
			B			
			T			
Temporal Resolution	Day	Minimum temporal period to which the BA product refers	G	1	Mostly for atmospheric modelers. A questionnaire to atmospheric and carbon modelers done in 2011 suggested 1-2 days <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , but it was recently updated to 1 day or even 6 hours by Heil & Pettinari, 2021	
			B	10	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021	
			T	30	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021	
Timeliness	Day	Days when the BA product is accessible after fires occurred	G	10	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021	
			B	120	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021	
			T	360	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021	
Product Accuracy	%	Average omission and commission errors	G	5	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021	
			B	15	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021	
			T	25	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021	

<b>Required Measurement Uncertainty (2-sigma)</b>	Accuracy	Standard deviation around the estimated burned area	G B T	Missing Missing	Even though specific thresholds have not been suggested in previous user requirement surveys, they have indicated the need to quantify those uncertainties by considering the different phases of BA product development, preferably expressed as standard errors around the estimated burned area. Uncertainty around the temporal reporting accuracy should also be provided. See Heil & Pettinari, 2021
<b>Stability</b>	Measures of omission and commission over the available time period	Assessment of whether a monotonic trend exists based on the slope (b) of the relationship between an accuracy measure (m) and time (t).	Some potential metrics of stability have been published in the last few years (Padilla et al. 2014, but it is not yet an international agreement on which one should be more suitable for measuring BA consistency. Padilla et al., proposed using the slope b of change of accuracy per year is estimated through a nonparametric linear regression. In addition, the temporal monotonic trend of accuracy (i.e. b different than zero) is tested with the Kendall's tau statistic (Conover 1999; Section 5.4). A statistically significant test result would indicate that accuracy measurement presents temporal instability, as it would have a significant increase or decrease over time.		
<b>Standards and References</b>	<ul style="list-style-type: none"> <li>• Chuvieco, E., Lizundia-Loiola, J., Pettinari, M.L., Ramo, R., Padilla, M., Tansey, K., Mouillot, F., Laurent, P., Storm, T., Heil, A., &amp; Plummer, S. (2018). Generation and analysis of a new global burned area product based on MODIS 250 m reflectance bands and thermal anomalies. <i>Earth Systems Science Data</i>, 10, 2015-2031.</li> <li>• Chuvieco, E., Mouillot, F., van der Werf, G.R., San Miguel, J., Tanasse, M., Koutsias, N., García, M., Yebra, M., Padilla, M., Gitas, I., Heil, A., Hawbaker, T.J., &amp; Giglio, L. (2019). Historical background and current developments for mapping burned area from satellite Earth observation. <i>Remote Sensing of Environment</i>, 225, 45-64.</li> <li>• Heil, A, and Pettinari, L. (2021). ESA CCI ECV Fire Disturbance: D1.1 User requirements document, v. 7.2 <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v7.2.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v7.2.pdf</a></li> <li>• Mouillot, F., Schultz, M.G., Yue, C., Cadule, P., Tansey, K., Ciais, P., &amp; Chuvieco, E. (2014). Ten years of global burned area products from spaceborne remote sensing—A review: Analysis of user needs and recommendations for future developments. <i>International Journal of Applied Earth Observation and Geoinformation</i>, 26, 64-79.</li> <li>• Padilla, M., Stehman, S.V., Litago, J., &amp; Chuvieco, E. (2014). Assessing the Temporal Stability of the Accuracy of a Time Series of Burned Area Products. <i>Remote Sensing</i>, 6, 2050-2068.</li> <li>• Roteta, E., Bastarrika, A., Storm, T., &amp; Chuvieco, E. (2019). Development of a Sentinel-2 burned area algorithm: generation of a small fire database for northern hemisphere tropical Africa <i>Remote Sensing of Environment</i>, 222, 1-17.</li> </ul> <p>NOTE: Until recently efforts to provide uncertainty estimates associated with burnt area products were rare. The ones that do, provide estimates based on probabilities of detection or on a quality type flag. As for other ECVs, the uncertainty of a particular variable should indicate the amount, in the same units of the variable, that is associated with an error margin. But because BA products come in the form of a binary maps, indicating if a pixel is burnt or not, the only possible value for uncertainty is 100%, i.e., the pixel did not burn when it did or burned when it did. Linking the algorithm detection probability with uncertainty can be misleading, as it does not reflect an actual uncertainty in terms of area. Instead it indicates a “detection confidence” and should be referred as such. However in case of aggregated BA products (in degrees of lat/long), the uncertainty of a burnt can be calculated the evaluating the areal outcome difference between higher and lower detection confidence settings. In this case, the uncertainty outcome would be an estimate in area units that reflects, in some way, the sensibility of the algorithm to the initial conditions. Ideally, uncertainty should be done by tracking the error propagation in all steps of the algorithm. To comply with this rule, future BA product should consider that individual pixels can also not burn entirely. They should be aimed at capturing the % of area that burnt inside of the pixel [in m2]. Instead of asking if a pixel burned or not we should be asking how much did it burnt. By doing so, product uncertainty can then be easily derived from uncertainty propagation in the algorithm.</p>				



### 9.4.2 ECV Product: Active Fires

Name						Active Fires					
Definition		Presence of a temporal thermal anomaly within a grid cell. Those thermal anomalies that are permanent should be linked to other sources of thermal emission (volcanos, gas flaring, industrial or power plants). Generally, the active fire maps are defined by the date/hour when the thermal anomaly was detected.									
Unit		m <sup>2</sup>									
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m	minimum mapping unit: length of the side of pixel	G	50	This resolution is mostly required by fire managers and fire extinction services						
			B	200	Useful for fire risk assessment and better understanding of fire risk factors						
			T	25.000	Most climate modelers work at coarse resolution grids, 025 d is the most common.						
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution	Minutes	Minimum temporal period to which the AF product refers	G	15	For fire management purposes, active fire detection should be done very frequently. Atmospheric modelers also require updated information on fire activity						
			B	120	Atmospheric modelers						
			T	1 day	Atmospheric and carbon modelers						
Timeliness	Minutes	Time lapse between satellite overpass and AF availability	G	10	Quick information is necessary to use AF as an early warning of fire activity						
			B	60	Quick information is necessary to use AF as an early warning of fire activity						
			T	1 day	Quick information is necessary to use AF for monitoring fire activity						
Product Accuracy	%	Average omission and commission errors	G	5	These values refer to BA products, based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021						
			B	15							
			T	25							
Required Measurement Uncertainty (2-sigma)	Accuracy	Standard error of fire detection	G	Missing	Missing						
			B	Missing	Missing						
			T	Missing	Missing						
Stability	Measures of omission and commission over the available time period	Assessment of whether a monotonic trend exists based on the slope (b) of the relationship between an accuracy measure (m) and time (t).	Some potential metrics of stability have been published in the last few years (Padilla et al. 2014, but it is not yet an international agreement on which one should be more suitable for measuring BA consistency. Padilla et al., proposed using the slope b of change of accuracy per year is estimated through a nonparametric linear regression. In addition, the temporal monotonic trend of accuracy (i.e. b different than zero) is tested with the Kendall's tau statistic (Conover 1999; Section 5.4). A statistically significant test result would indicate that accuracy measure m presents temporal instability, as it would have a significant increase or decrease over time.								
Standards and References	<ul style="list-style-type: none"> <li>Heil, A, and Pettinari, L. (2021). ESA CCI ECV Fire Disturbance: D1.1 User requirements document, v. 7.2 <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v7.2.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v7.2.pdf</a></li> <li>Mouillot, F., Schultz, M.G., Yue, C., Cadule, P., Tansey, K., Ciais, P., &amp; Chuvieco, E. (2014). Ten years of global burned area products from spaceborne remote sensing—A review: Analysis of user</li> </ul>										



needs and recommendations for future developments. *International Journal of Applied Earth Observation and Geoinformation*, 26, 64-79.

### 9.4.3 ECV Product: Combustion completeness (CC) / also termed Burning efficiency (BE)

Name Combustion completeness (CC) / also termed Burning efficiency (BE)					
Definition Proportion of pre-fire biomass consumed by the fire.					
Unit unitless					
Note This variable is a requisite for estimating fire emissions. Currently is based on weather data as a proxy of fire severity and CC, or is estimated based on controlled fires, which rarely described real burning conditions. The requirements are similar to burned area, since CC is another component to estimate fire emissions using bottom-up approaches					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	m	minimum mapping unit: length of the side of pixel	G	30	This resolution is mostly oriented towards regional studies, particularly in those regions where small fires (< 100 ha) have an important share in fire occurrence. The importance of small fires has been evidenced in recent papers (Roteta et al. 2019, among others)
			B	250	Products based on higher resolution MODIS products have shown higher sensitivity to small fires,
			T	25.000	Most climate modelers work at coarse resolution grids, 025 d is the most common (Heil & Pettinari, 2021). A recent paper on fuel consumed used coarse resolution passive microwave data (Giuseppe et al., 2021)
Vertical Resolution	N/A		G	NA	
			B	NA	
			T	NA	
Temporal Resolution	Day	Minimum temporal period to which the CC product refers	G	1	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021. This document refers to BA, not properly to CC.
			B	10	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021
			T	30	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021
Timeliness	Day	Days when the CC product is accessible after fires occurred	G	10	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021
			B	120	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021
			T	360	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021
Product Accuracy	unitless	Average deviation between estimated and observed CC	G	Missing	Missing
			B	Missing	Missing
			T	Missing	Missing
Required Measurement Uncertainty (2-sigma)	Accuracy	Standard deviation around the estimated	G	Missing	Missing
			B	Missing	Missing
			T	Missing	Missing

		CC	
<b>Stability</b>	Measures of accuracy over the available time period	Assessment of whether a trends	Similar to those used for burned area
<b>Standards and References</b>	<ul style="list-style-type: none"> <li>• Chuvieco, E., Mouillot, F., van der Werf, G.R., San Miguel, J., Tanasse, M., Koutsias, N., Garcia, M., Yebra, M., Padilla, M., Gitas, I., Heil, A., Hawbaker, T.J., &amp; Giglio, L. (2019). Historical background and current developments for mapping burned area from satellite Earth observation. <i>Remote Sensing of Environment</i>, 225, 45-64.</li> <li>• Heil, A, and Pettinari, L. (2021). ESA CCI ECV Fire Disturbance: D1.1 User requirements document, v. 7.2 <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v7.2.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v7.2.pdf</a></li> <li>• Di Giuseppe, F., Benedetti, A., Coughlan, R., Vitolo, C., &amp; Vuckovic, M. (2021). A Global Bottom-Up Approach to Estimate Fuel Consumed by Fires Using Above Ground Biomass Observations. <i>Geophysical Research Letters</i>, 48, e2021GL095452.</li> <li>• Roteta, E., Bastarrika, A., Storm, T., &amp; Chuvieco, E. (2019). Development of a Sentinel-2 burned area algorithm: generation of a small fire database for northern hemisphere tropical Africa <i>Remote Sensing of Environment</i>, 222, 1-17.</li> </ul>		

#### 9.4.4 ECV Product: Fire Radiative Power (FRP)

Name						Fire Radiative Power (FRP)					
Definition		Amount of energy released by area unit. Commonly it is expressed in W/m <sup>2</sup> . This variable is a function of actual temperature of the active fire at the satellite overpass and the proportion of the grid cell being burned.									
Unit		W/m <sup>2</sup>									
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m	minimum mapping unit: length of the side of pixel	G	50	This resolution is mostly required by fire managers and fire extinction services						
			B	200	Useful for fire risk assessment and better understanding of fire risk factors						
			T	25.000	Based on a questionnaire to atmospheric and carbon modelers done in 2011: <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v5.2_xkSTbGK.pdf</a> , updated in Heil & Pettinari, 2021						
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution	Minutes	Minimum temporal period to which the FRP product refers	G	15	For fire management purposes, active fire detection should be done very frequently. Atmospheric modelers also require updated information on fire activity						
			B	120	Atmospheric modelers						
			T	1 day	Atmospheric and carbon modelers						
Timeliness	Minutes	Time lapse between satellite overpass and AF availability	G	10	Quick information is necessary to use FRP as an early warning of fire activity						
			B	60	Quick information is necessary to use FRP as an early warning of fire activity						
			T	1 day	Quick information is necessary to use FRP as an early warning of fire activity						
Product Accuracy	W/m <sup>2</sup>	Average deviation between estimated and observed FRP	G	Missing	Missing						
			B	Missing	Missing						
			T	Missing	Missing						
Required Measurement Uncertainty (2-sigma)	Accuracy	Standard deviation around the estimated FRP	G	Missing	Missing						
			B	Missing	Missing						
			T	Missing	Missing						
Stability	Measures of accuracy over the available time period	Assessment of whether a monotonic trend exists based on the slope (b) of the relationship between an accuracy measure (m) and time (t).	Similar to those used for burned area								
Standards and References	<ul style="list-style-type: none"> <li>Andela, N., van der Werf, G.R., Kaiser, J.W., van Leeuwen, T.T., Wooster, M.J., &amp; Lehmann, C.E.R. (2016). Biomass burning fuel consumption dynamics in the tropics and subtropics assessed from satellite. <i>Biogeosciences</i>, 13, 3717-3734.</li> <li>Heil, A, and Pettinari, L. (2021). ESA CCI ECV Fire Disturbance: D1.1 User requirements document, v. 7.2 <a href="https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v7.2.pdf">https://climate.esa.int/media/documents/Fire_cci_D1.1_URD_v7.2.pdf</a></li> <li>Roteta, E., Bastarrrika, A., Storm, T., &amp; Chuvieco, E. (2019). Development of a Sentinel-2 burned area algorithm: generation of a small fire database for northern hemisphere tropical Africa <i>Remote</i></li> </ul>										

*Sensing of Environment, 222, 1-17.*

## 9.5 Fraction of absorbed photosynthetically active radiation (FAPAR)

### 9.5.1 ECV Product: Fraction of Absorbed Photosynthetically Active Radiation

Name						Fraction of Absorbed Photosynthetically Active Radiation					
Definition						FAPAR is defined as the fraction of photosynthetically active radiation (PAR; solar radiation reaching the surface in the 0.4-0.7µm spectral region) that is absorbed by vegetation canopy. Both black-sky (assuming only direct radiation) and white-sky (assuming that all the incoming radiation is in the form of isotropic diffuse radiation) FAPAR values may be considered. Similarly FAPAR can also be angularly integrated or instantaneous (i.e., at the actual sun position of measurement). Leaves-only FAPAR refers to the fraction of PAR radiation absorbed by live leaves only, i.e., contributing to the photosynthetic activity within leaf cells.					
Unit						N/A					
Note						LENGTH OF RECORD: Threshold: 20 years; Target: >40 years					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m		G	10	FAPAR plays a critical role in assessing the primary productivity of canopies, the associated fixation of atmospheric CO <sub>2</sub> and the energy balance of the surface. Application at 10 m; Climate Adaptation, CO <sub>2</sub> fluxnet up scaling. Best practices <a href="http://www.qa4ecv.eu/sites/default/files/D4.2.pdf">http://www.qa4ecv.eu/sites/default/files/D4.2.pdf</a>						
			B	250	Scale needed for regional and global climate modeling. Land surface and Earth System Model evaluation of LAI is often completed at 1km spatial resolution for global assessments, so it would be useful to include these coarser resolution data.						
			T	1000	For NWP (ECMWF)						
Vertical Resolution	N/A		G	0.1	Every 1/10th of the canopy thickness to improve evaluation of vegetation LAI within Land surface/Earth System Models						
			B		Any specified level through the canopy						
			T	1	Canopy mean						
Temporal Resolution	day		G	1	When assimilated by model, this value corresponds to the climate model temporal resolution. In order to derive a better phenology accuracy.						
			B								
			T	10	When using for crops or ecosystems modeling, or Land Surface / Earth System Model evaluation.						
Timeliness	day		G	1	In order to be useful in climate change services.						
			B	5	In order to be useful in environmental change services. Can be longer (~months) for historic climate/environmental change assessments.						
			T	10	In order to be useful in environmental change services.						
Required Measurement Uncertainty (2-sigma)		one standard deviation or error covariance matrix, with associated PDF shape (functional form of estimated error distribution for the term).	G	5% for values higher than 0.05 And 0.0025 for values smaller	The values were assessed through physical link between FAPAR with the LAI and surface albedo uncertainties.						
			B								
			T	10% for values higher than 0.05; and 0.0025 for values smaller	The threshold value of uncertainty was assessed through physical link between FAPAR with the LAI and surface albedo uncertainties.						
Stability	Rate of change over the	Assessment of whether a trend	G	< 1.5%	'The required stability is some fraction of the expected signal' (see Ohring, et. al. 2005.). In the case that we have data over <b>10</b> years (= one decade)						

	available time period (% per decade)	exists with respect to reference data, taken into the definition, i.e. white-sky or black-sky and total versus 'green foliage'.			<p><b>N=10 and U=5%</b>                      Assuming U constant along the period                      It means <math>S = \text{SQRT}(N \cdot U^2) / N = \text{SQRT}(N) \cdot U / N</math>  <math>S = 0.3 \cdot U = 0.31 \cdot 10 / 100.0 = 1.5 \%</math>                      This number should be smaller than expected FAPAR trend.</p>
			B T	< 3%	Same as above with U = 10%
<b>Standards and References</b>	LENGTH OF RECORD: Threshold: 20 years; Target: > 40 years				

## 9.6 Land cover

### 9.6.1 ECV Product: Maps of key IPCC land classes, related changes and land management types

Name						Maps of key IPCC land classes, related changes and land management types					
Definition						Land cover is defined as the observed (bio)- physical cover on the Earth's surface					
Unit						Primary units are categories (binary variables such as forest or cropland) or continuous variables classifiers (e.g. fraction of tree canopy cover in percent). Secondary outputs include surface area of land cover/use types and land cover/use changes (in ha).					
Note						The observed (bio)- physical cover on the Earth's surface can also be variable in time due to land changes and phenology. Crucially, this table refers to change products.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	M / degree	Size of grid cell	G	10-300	This would allow finer detail to be observed, and for land management to be assessed at smaller units.						
			B	300-1000	For most climate users, 300 m is sufficient.						
			T	1000-1 degree	For modelling for example at the global scale, this resolution is sufficient. More detailed land cover descriptions are more targeted for regional applications in climate change mitigation and adaptation purposes.						
Vertical Resolution	Set to NA since ECV products provide estimates as total over a certain area with further vertical discrimination. There is currently no consideration of the third dimension for land ECV products though some of the definitions (such as forests) often use, among others, a minimum height criteria.										
Temporal Resolution			G	Monthly	Allows regrowth, phenology, changes in water extent related to seasonality to be detected.						
			B	Yearly	Inter-annual changes can be detected. Suitable for most international and national policy reporting cycles.						
			T	5-yearly	Suitable scale for longer-term mapping, related to broader land cover change dynamics.						
Timeliness			G	Monthly	Ideally, land cover data become available soon after the acquisition of the data but quality processing and ECV product derivation and accuracy assessment, as well as, long-term consistency is to be ensured to track changes and trends.						
			B	Yearly	Policy makers will be able to develop and assess policies based on these changes.						
			T	5-yearly	As above.						
Temporal Extent (Time span)	Year		G	>100 years	For modelling over longer histories historic data are required.						
			B	50 years	Near historic changes can be assessed.						
			T	30 years	Only current maps using the current generation of satellites are used.						
Required Measurement Uncertainty (2-sigma)	% for accuracy and errors of omission and commission and hectares for area estimates incl. 95 % confidence intervals	Primary: overall map accuracy and errors of omission and commission for individual land cover categories and types of change (incl. confidence interval). Secondary: bias for area estimates (incl. confidence	G	5	For reporting purposes, this would allow sufficient accuracy, where all classes have high accuracies.						
			B	15	For other uses, this would be sufficient – it would be expected that some classes would have higher accuracy -for example confusion between built-up and forest would be lower, but confusion between agriculture and bare might be higher.						
			T	25	This threshold would be suitable for maximum commission/omission error for individual categories. Overall accuracy might be expected to be higher						



<b>Stability</b>	% incl. 95 % confidence intervals	intervals) Primary: errors of omission and commission for individual land cover categories and types of change (incl. confidence interval)	G	5	Stability is important for long-term land cover datasets where multiple sensors are used to generate a time series dataset. High stability is required for assessing long-term trends. The stability can be assessed by multi-date independent accuracy assessment. The stability requirements are tighter that for overall uncertainty since the aim for multi-date ECV data is to provide information on changes and trends.
			B	15	Stability is important for long-term land cover datasets where multiple sensors are used to generate a time series dataset. High stability is required for assessing long-term trends. The stability can be assessed by multi-date independent accuracy assessment. The stability requirements are tighter that for overall uncertainty since the aim for multi-date ECV data is to provide information on changes and trends.
			T	25	Stability is important for long-term land cover datasets where multiple sensors are used to generate a time series dataset. High stability is required for assessing long-term trends. The stability can be assessed by multi-date independent accuracy assessment. The stability requirements are tighter that for overall uncertainty since the aim for multi-date ECV data is to provide information on changes and trends.
<b>Standards and References</b>					

## 9.6.2 ECV Product: Maps of High-Resolution Land Cover

Name						Maps of High-Resolution Land Cover					
Definition						Land cover is defined as the observed (bio)- physical cover on the Earth's surface					
Unit						Primary units are categories (binary variables such as forest or cropland) or continuous variables classifiers (e.g. fraction of tree canopy cover in percent). Secondary outputs include surface area of land cover/use types and land cover/use changes (in ha).					
Note						The observed (bio)- physical cover on the Earth's surface can also be variable in time due to land changes and phenology.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m	Size of grid cell	G	< 10	Suitable for local land managers - specifically for targeted applications in climate change mitigation and adaptation. Small features such as green spaces within cities are visible and changes to water extent (in particular change in river courses) also become visible at this resolution. More detailed land cover descriptions are more.						
			B	10-30	Can identify human induced land change at regional levels. Most features of interest are visible, and broad changes captured.						
			T	30-100	Broad landscape typologies and changes across landscapes are visible, so suitable for landscape management.						
Vertical Resolution	Set to NA since ECV products provide estimates as total over a certain area with further vertical discrimination. There is currently no consideration of the third dimension for land ECV products though some of the definitions (such as forests) often use, among others, a minimum height criteria										
Temporal Resolution	Month / Year		G	Monthly	Allows regrowth, phenology, changes in water extent related to seasonality to be detected.						
			B	Yearly	Inter-annual changes can be detected						
			T	5-yearly	Suitable scale for longer-term mapping, related to broader land cover change dynamics.						
Timeliness	Month / Year		G	1-2 Months	Ideally, land cover data become available soon after the acquisition of the data but quality processing and ECV product derivation and accuracy assessment, as well as, long-term consistency is to be ensured to track changes and trends. These frequent changes may be relevant for land managers who can react quickly to changes.						
			B	Yearly	Annual and bi-annual reporting applications. Policy makers will be able to develop and assess policies based on regular updates and observed changes.						
			T	5-yearly	As above.						
Temporal Extent (Time span)	Year		G	-30-50	Historic changes which most users are interested in are captured. Only be achieved with modeling approaches using non-earth observation data sources (i.e. historical maps) – where more recent high resolution data sources (Landsat, Sentinel) are not available.						
			B	10-30	Historic changes can be assessed for the Earth observation data which are required at this resolution.						
			T	One time only (0)	Only current and potentially future data are available, but this is useful for those who require current status products, for example for modelling, and static assessments.						
Required Measurement Uncertainty (2-sigma)	% for accuracy and errors of omission and commission and hectares for area estimates incl. 95 % confidence intervals	Primary: overall map accuracy and errors of omission and commission for individual land cover categories and types of change (incl.	G	5	For reporting purposes, this would allow sufficient accuracy, where all classes have high accuracies. An independent accuracy assessment using statistically robust, global or regional reference data of higher quality is required for any ECV land cover product.						
			B	20	For other uses, this would be sufficient – it would be expected that some classes would have higher accuracy -for example confusion between built-up and forest would be lower, but confusion between agriculture and bare might be higher. An independent accuracy assessment using statistically robust, global or regional reference data of higher quality is required for any ECV land cover product.						
			T	35	This threshold would be suitable for maximum commission/omission error for individual categories.						

		confidence interval). Secondary: bias for area estimates (incl. confidence intervals)			Overall accuracy might be expected to be higher. An independent accuracy assessment using statistically robust, global or regional reference data of higher quality is required for any ECV land cover product.
<b>Stability</b>	% incl. 95 % confidence intervals	Primary: errors of omission and commission for individual land cover categories and types of change (incl. confidence interval)	G	5	Stability is important for long-term land cover datasets where multiple sensors are used to generate a time series dataset. High stability is required for assessing long-term trends. The stability can be assessed by multi-date independent accuracy assessment. The stability requirements are tighter than for overall uncertainty since the aim for multi-date ECV data is to provide information on changes and trends.
			B	15	Stability is important for long-term land cover datasets where multiple sensors are used to generate a time series dataset. High stability is required for assessing long-term trends. The stability can be assessed by multi-date independent accuracy assessment. The stability requirements are tighter than for overall uncertainty since the aim for multi-date ECV data is to provide information on changes and trends.
			T	25	Stability is important for long-term land cover datasets where multiple sensors are used to generate a time series dataset. High stability is required for assessing long-term trends. The stability can be assessed by multi-date independent accuracy assessment. The stability requirements are tighter than for overall uncertainty since the aim for multi-date ECV data is to provide information on changes and trends.
<b>Standards and References</b>					

### 9.6.3 ECV Product: Land Cover

Name						Land Cover					
Definition						Land cover is defined as the observed (bio)- physical cover on the Earth's surface					
Unit						Primary units are categories (binary variables such as forest or cropland) or continuous variables classifiers (e.g. fraction of tree canopy cover in percent). Secondary outputs include surface area of land cover/use types and land cover/use changes (in ha). UN/FAO Land Cover Classification System (LCCS) + C3/C4 sub-classification should be used with cross-walking tables to other common classifications					
Note						The observed (bio)- physical cover on the Earth's surface can also be variable in time due to land changes and phenology.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m	Size of grid cell	G	100-300	Most climate users are satisfied by a horizontal resolution of 300m if they can be provided for long time spans.						
			B	300-1 km							
			T	>1 km							
Vertical Resolution	Set to NA since ECV products provide estimates as total over a certain area with further vertical discrimination. There is currently no consideration of the third dimension for land ECV products though some of the definitions (such as forests) often use, among others, a minimum height criteria										
Temporal Resolution	Month / Year	time	G	Monthly	Allows regrowth, phenology, changes in water extent related to seasonality to be detected.						
			B	Yearly							
			T	5-yearly							
Timeliness	Month / Year		G	Seasonally (3 months)	Ideally, land cover data become available soon after the acquisition of the data but quality processing and ECV product derivation and accuracy assessment, as well as, long-term consistency is to be ensured to track changes and trends. These frequent changes may be relevant for land managers who can react quickly to changes.						
			B	Yearly							
			T	5-yearly							
Temporal Extent (Time span)	Year		G	50+ years	Historic changes which most users are interested in are captured. Only be achieved with modeling approaches using non-earth observation data sources (i.e. historical maps)						
			B	10-50							
			T	One time only (0)							
Required Measurement Uncertainty (2-sigma)	% for accuracy and errors of omission and commission and hectares for area estimates incl. 95 % confidence intervals	Primary: overall map accuracy and errors of omission and commission for individual land cover categories and types of change (incl. confidence interval). Secondary: bias for area estimates (incl. confidence intervals)	G	5	For reporting purposes, this would allow sufficient accuracy, where all classes have high accuracies. An independent accuracy assessment using statistically robust, global or regional reference data of higher quality is required for any ECV land cover product.						
			B	20							
			T	35							

<b>Stability</b>	% incl. 95 % confidence intervals	Primary: errors of omission and commission for individual land cover categories and types of change (incl. confidence interval)	G	5	Stability is important for long-term land cover datasets where multiple sensors are used to generate a time series dataset. High stability is required for assessing long-term trends. The stability can be assessed by multi-date independent accuracy assessment. The stability requirements are tighter that for overall uncertainty since the aim for multi-date ECV data is to provide information on changes and trends.
			B	15	Stability is important for long-term land cover datasets where multiple sensors are used to generate a time series dataset. High stability is required for assessing long-term trends. The stability can be assessed by multi-date independent accuracy assessment. The stability requirements are tighter that for overall uncertainty since the aim for multi-date ECV data is to provide information on changes and trends.
			T	25	Stability is important for long-term land cover datasets where multiple sensors are used to generate a time series dataset. High stability is required for assessing long-term trends. The stability can be assessed by multi-date independent accuracy assessment. The stability requirements are tighter that for overall uncertainty since the aim for multi-date ECV data is to provide information on changes and trends.
<b>Standards and References</b>					

## 9.7 Land Temperature

### 9.7.1 ECV Product: Land Surface Temperature (LST)

Name						Land Surface Temperature					
<b>Definition</b>						Land Surface Temperature (LST) is a measure of how hot or cold the surface of the Earth would feel to the touch. When derived from radiometric measurements of ground-based, airborne, and spaceborne remote sensing instruments, LST is the aggregated radiometric surface temperature of the ensemble of components within the sensor field of view. From a climate perspective, LST is important for evaluating land surface and land-atmosphere exchange processes, constraining surface energy budgets and model parameters, and providing observations of surface temperature change both globally and in key regions.					
<b>Unit</b>						K – average over grid cell					
<b>Note</b>						ECV Requirements derived from 77 responses from an online user survey of LST climate community in LST CCI Project					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	Size of grid cell	G	< 1	Reflect the primary application of the climate users in the survey. The three most popular primary applications are model evaluation, evapotranspiration/vegetation or crop monitoring and urban climate, all of which may quite feasibly require data with a spatial resolution of 1 km or better. Only polar orbiting satellites can currently provide data at these resolutions.						
			B	< 1							
			T	1							
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution	h		G	< 1	Only Geostationary data can provide data at these resolutions but these are regional datasets. In contrast polar orbiting satellites cover the whole globe but are restricted to day/night temporal resolution.						
			B	1							
			T	6	Very nearly met by day/night temporal resolution from polar orbiting satellite, which satisfies 70% of climate users in survey.						
Timeliness	N/A		G		Note, a survey of 80 non-climate users for timeliness from the ESA DUE GlobTemperature Project revealed the a “threshold” need of 1 month for long-term data records, and a “breakthrough” of 48 hours for long-term data records.						
			B								
			T								
Required Measurement Uncertainty (2-sigma)		An estimate of the expected spread of the distribution of possible values	G	< 1 K	This is the required total uncertainty per pixel combining the four groups of uncertainty components: random, locally correlated atmospheric, locally correlated surface, and large scale systematic. There is a requirement for knowledge on correlation length scales						
			B	< 1 K							
			T	< 1 K							
Stability	K per decade	Assessment of whether a monotonic trend exists with respect to ground-based Fiducial Reference Measurements or related ECV datasets (such as near-surface air temperature)	G	0.1	For climate modeling community long-term product stability is noted as high priority. Temporal stability of the LST products need to be sufficient for global and regional trends in LST anomalies to be calculated.						
			B	0.2							
			T	0.3							
<b>Standards and References</b>						<ul style="list-style-type: none"> <li>Bulgin, C., &amp; Merchant, C. (2016). DUE GlobTemperature Requirements Baseline Document.</li> <li>Ghent, D., Veal, K., Trent, T., Dodd, E., Sembhi, H., and Remedios, J. (2019). A New Approach to Defining Uncertainties for MODIS Land Surface Temperature. Remote Sensing, 11, 1021. doi: 10.3390/rs11091021</li> <li>Good, E. J., Ghent, D. J., Bulgin, C. E., &amp; Remedios, J. J. (2017). A spatiotemporal analysis of the relationship between near-surface air temperature and satellite land surface temperatures using 17 years of data from the ATSR series. Journal of Geophysical Research: Atmospheres, 122(17), 9185-9210. doi: 10.1002/2017JD026880</li> <li>LST CCI (2018) User Requirements Document, Reference LST-CCI-D1.1-URD - i1r0</li> </ul>					

- LST CCI (2019) End-to-End ECV Uncertainty Budget Document, Reference LST-CCI-D2.3-E3UB - i1r0
- Merchant, C. J., Paul, F., Popp, T., Ablain, M., Bontemps, S., Defourny, P., Hollmann, R., Lavergne, T., Laeng, A., de Leeuw, G., Mittaz, J., Poulsen, C., Povey, A. C., Reuter, M., Sathyendranath, S., Sandven, S., Sofieva, V. F., and Wagner, W. (2017). Uncertainty information in climate data records from Earth observation. *Earth System Science Data*, 0, 511-527.

## 9.8 Soil Temperature

### 9.8.1 ECV Product: Soil Temperature

Name						Soil temperature					
Definition						Soil temperature at different depth					
Unit						Celsius (°C)					
Note						<p>Soil temperature is an important variable and its usage is similar to the sea surface temperature (SST) in meteorology and climate.</p> <p>(1) <b>The difference between SST and LST.</b> The LST is the skin temperature of land and changes quickly. SST has a well defined relationship with the sea temperature at different depth (such as 1m, 10m). As a result, the SST could represent the real thermal energy of sea which has very important usage. The specific heat capacity of soil is much smaller than the specific heat capacity of water. Compared to water, soils conduct heat very slowly.</p> <p>(2) The reason choosing the soil temperature.</p> <p>Firstly, the soil temperature at different depth could represent the thermal energy. The standard depths for soil temperature measurements are 5, 10, 20, 50 and 100 cm below the surface according to the CIMO guide (0cm is an additional in CMA); additional depths may be included.</p> <p>Secondly, LST is more difficult to measure using in situ thermometers or thermocouples s. The temperature sensor is difficult to fit tightly to the ground and remains stable. In the case of precipitation, the fitness will change and cause unstable measurement results. The position of the temperature sensor needs to be adjusted manually. Infrared temperature sensors are expensive, and require representative fields of view to that observed from satellites, so it is challenging to create a global network to represent all possible land covers.</p> <p>Soil temperature is easy to measure using thermometer (0/5/10 cm) or temperature sensor (5/10/20/50/100 cm).</p>					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	km	2.5 degrees of longitude	G	50	For the GSN, the horizontal distance between two network stations should not be less than the length of 2.5 degrees of longitude at that location (278 km at the equator). For stations beyond 60 degrees latitude (north or south) the minimum distance is fixed at the length of 2.5 degrees of longitude at 60 degrees latitude (139 km). Consequently, the minimum spacing varies from 278 km at the equator to 139 km in the polar regions.						
			B	150							
			T	139-278							
Vertical Resolution	cm		G	0,5,10,20,50,100,180	The standard depths for soil temperature measurements are 5, 10, 20, 50 and 100 cm below the surface; additional depths may be included. LST is important for the satellite observation. So zero depth could be included. Goal: At the depth of 180cm the temperature is useful for long term climate monitor and prediction. Breakthrough: Automatic Weather Station observe could observe the soil temperature at these depths. Threshold: The thermometer can be used at this depth. Suitable for observing stations without automatic weather stations.						
			B	0,5,10,20,50,100							
			T	0,5,10,20							
Temporal Resolution	h		G	3	Regarding surface synoptic observations: the main standard times shall be 0000, 0600, 1200 and 1800 UTC. The intermediate standard times shall be 0300, 0900, 1500 and 2100 UTC. Every effort should be made to obtain surface synoptic observations four times daily at the main standard times, with priority being given to the 0000 and 1200 UTC observations required for global exchanges.						
			B	6							
			T	24							
Timeliness	N/A		G	3							



			B	6	
			T	48	
Required Measurement Uncertainty (2-sigma)	K		G	0.1 K	
			B	0.2 K	
			T	0.2 K	
Stability			G		
			B		
			T		
Standards and References	WMO Guide to Meteorological Instruments and Methods of Observation (WMO-No.8) Guide to the GCOS Surface Network (GSN) and GCOS Upper-Air Network (GUAN) (GCOS-144) (WMO/TD No. 1558)				

## 9.9 Leaf Area Index

### 9.9.1 ECV Product: Leaf Area Index

Name Leaf Area Index					
Definition	Effective Leaf Area Index; The LAI value that would produce the same indirect ground measurement as that observed assuming random foliage distribution. ( $LAI_{eff} = LAI_{true} \times \text{canopy clumping index}$ ) (Fang et al., 2019) True Leaf Area Index (( $LAI_{true}$ )) of a plant canopy or ecosystem is defined as one half of the total green leaf area per unit horizontal ground surface area and measures the area of leaf material present in the specified environment. (Projection to the underlying ground along the normal to the slope).				
Unit	m <sup>2</sup> /m <sup>2</sup>				
Note	The conversion of data measurements to true values is an essential step and requires additional information about the structure and architecture of the canopy, e.g. gap size distributions, at the appropriate spatial resolutions. LENGTH OF RECORD: Threshold: 20 years; Target: >40 years				
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	m		G	10	Leaf Area Index controls important mass and energy exchange processes, such as radiation and rain interception, as well as photosynthesis and respiration, which couple vegetation to the climate system. Application at 10 m: Climate Adaptation, Agricultural monitoring Best practices published here: <a href="http://www.qa4ecv.eu/sites/default/files/D4.2.pdf">http://www.qa4ecv.eu/sites/default/files/D4.2.pdf</a>
			B	250	Scale needed for regional and global climate modeling. Land surface and Earth System Model evaluation of LAI is often completed at 1km spatial resolution for global assessments, so it would be useful to include these coarser resolution data.
			T	1000	For NWP (ECMWF)
Vertical Resolution	canopy thickness		G	0.1	Every 1/10th of the canopy thickness to improve evaluation of vegetation LAI within Land surface/Earth System Models
			B		Any specified level through the canopy
			T	1	Canopy mean
Temporal Resolution	days		G	1	When assimilated by model, this value corresponds to the climate model temporal resolution. In order to derive a better phenology accuracy.
			B		
			T	10	When using for crops or ecosystems modeling, or Land Surface / Earth System Model evaluation.
Timeline	days		G	1	In order to be useful in climate change services.
			B	5	In order to be useful in environmental change services. Can be longer (~months) for historic climate/environmental change assessments.
			T	10	For NWP (ECMWF)
Required Measurement Uncertainty (2-sigma)	m <sup>2</sup> /m <sup>2</sup>	One standard deviation or error covariance matrix with associated PDF shape (functional form of estimated error distribution)	G	10% when values are higher than 0.5; 0.05 for smaller values.	The goal value of uncertainties were assessed through literature review of impact of climate change on Leaf Area Index using various earth system models (see Mahowald, et. al., 2016; <a href="https://www.earth-syst-dynam.net/7/211/2016/">https://www.earth-syst-dynam.net/7/211/2016/</a> ) They show impact on LAI deviation at global scale using various RCP scenarios. If we take the models ensemble results, we demonstrate that the uncertainties should be less than <b>Delta_LAI ~0.20 for a 2 deg. C deviation for an annual average LAI</b> , that can be approximated to ~1.5. This means that the uncertainties should be smaller than <b>10% (~0.20/1.87*100.)</b> .
			B		
			T	20% when values are higher than 0.5; 0.10 for smaller	Same as above but with Delta_LAI ~0.25

		tion for the term).		values.	
Stability	rate of change of LAI over the available time period (m <sup>2</sup> /m <sup>2</sup> per decade)	A factor of uncertainties to demonstrate that the 'error' of the product remains constant over the period, typically a decade or more (see background information).	G	< 3% per decade	<p>'The required stability is some fraction of the expected signal' (see Ohring, et. al. 2005. <a href="https://journals.ametsoc.org/doi/pdf/10.1175/BAMS-86-9-1303">https://journals.ametsoc.org/doi/pdf/10.1175/BAMS-86-9-1303</a>).</p> <p>"It may represent a requirement on the extent to which the error of the product remains constant over a long period, typically a decade or more. It can be defined by the mean of uncertainties over a month ...".</p> <p>In the case that we have data over <b>10</b> years (= one decade) <b>N=10</b> and <b>U=10%</b>  <math>S = \sqrt{\text{sum}(U^2)}/N</math>.                      Assuming U constant along the period                      It means <math>S = \text{SQRT}(N * U^2) / N = \text{SQRT}(N) * U / N</math>  <math>S = 0.3 * U = 0.31 * 10 / 100.0 = 3 \%</math>                      This number should be smaller than expected Leaf Area Index trend.                      Reference:                      C. Y. Jiang, Y. Ryu, H. Fang, R. Myneni, M. Claverie, Z. Zhu, Inconsistencies of interannual variability and trends in long-term satellite leaf area index products. <i>Glob. Chang. Biol.</i> <b>23</b>, 4133–4146 (2017).)</p>
			B		
			T	< 6% per decade	Same as above but with threshold uncertainty.
Standards and References	<p>LENGTH OF RECORD: Threshold &gt; 20 years; Goal &gt;40 years (Spatially and temporally consistent and gap filled, with provision of the related Land use/land cover background)</p> <ul style="list-style-type: none"> <li>Fang, H., Baret, F., Plummer, S., &amp; Schaepman-Strub, G. (2019). An overview of global leaf area index (LAI): Methods, products, validation, and applications. <i>Reviews of Geophysics</i>. 57, 739– 799. <a href="https://doi.org/10.1029/2018RG000608">https://doi.org/10.1029/2018RG000608</a></li> <li>Boussetta S., Balsamo G., Dutra E., Beljaars A., Albergel C. (2015) Assimilation of surface albedo and vegetation states from satellite observations and their impact on numerical weather prediction, <i>Remote Sensing of Environment</i>, pp. 111-126. DOI: 10.1016/j.rse.2015.03.009</li> <li>Fernandes, R., Plummer, S., Nightingale, J., Baret, F., Camacho, F., Fang, H., Garrigues, S., Gobron, N., Lang, M., Lacaze, R., LeBlanc, S., Meroni, M., Martinez, B., Nilson, T., Pinty, B., Pisek, J., Sonnentag, O., Verger, A., Welles, J., Weiss, M., &amp; Widlowski, J.L. (2014). Global Leaf Area Index Product Validation Good Practices. Version 2.0. In G. Schaepman-Strub, M. Román, &amp; J. Nickeson (Eds.), <i>Best Practice for Satellite-Derived Land Product Validation</i> (p. 76): Land Product Validation Subgroup (WGCV/CEOS), doi: 10.5067/doc/ceoswgcvlpv/lai.002</li> </ul>				

## 9.10 Soil carbon

### 9.10.1 ECV Product: Peatlands total depth of profile, area and location

Name						Peatlands total depth of profile, area and location					
Definition						Geographic extent of peatlands and depth of peat at intervals (20 m) within the peatlands					
Unit											
Note											
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	m	Grid cell size	G	20							
			B								
			T								
Vertical Resolution	m		G								
			B								
			T								
Temporal Resolution	Years	Time between estimates	G	10							
			B								
			T	5							
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	%	2 Sd	G	10							
			B								
			T								
Stability			G								
			B								
			T								
Standards and References											

### 9.10.2 ECV Product: Mineral soil bulk density to 30 cms and 1m

<b>Name</b>	Mineral soil bulk density to 30 cms and 1m				
<b>Definition</b>	Bulk density of dry soil averaged over the topmost 30 cm and topmost 1 m, kg/m <sup>3</sup>				
<b>Unit</b>					
<b>Note</b>					
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km	Grid cell size	G	0.1	For permafrost
			B	1	
			T	20	
<b>Vertical Resolution</b>	N/a		G		
			B		
			T		
<b>Temporal Resolution</b>	Years	Time between estimates	G	10	
			B		
			T	5	
<b>Timeliness</b>			G		
			B		
			T		
<b>Required Measurement Uncertainty (2-sigma)</b>	%	2 Sd	G	10	
			B		
			T		
<b>Stability</b>			G		
			B		
			T		
<b>Standards and References</b>	National Research Council (2014). Opportunities to Use Remote Sensing in Understanding Permafrost and Related Ecological Characteristics: Report of a Workshop. Washington, DC: The National Academies Press. <a href="https://doi.org/10.17226/18711">https://doi.org/10.17226/18711</a>				

### 9.10.3 ECV Product: Carbon in Soil

Carbon in Soil					
<b>Name</b>	Carbon in Soil				
<b>Definition</b>	% of organic carbon in the topmost 30 cm and sub-soil 30-1000cm				
<b>Unit</b>	Mass %				
<b>Note</b>					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km	Grid cell size	G	0.1	
			B		
			T	1	
Vertical Resolution	N/a	0-30 cm and 30-1000cm	G		
			B		
			T		
Temporal Resolution	Years	Time between estimates	G	1	Consistent with LUC
			B		
			T	5	
Timeliness			G		
			B		
			T		
Required Measurement Uncertainty (2-sigma)	%	2 Sd	G	10	
			B		
			T		
Stability			G		
			B		
			T		
<b>Standards and References</b>	<ul style="list-style-type: none"> <li>Nachtergaele, F.H., van Velthuisen, L. Verekst, and D. Widberg, Eds., 2012: Harmonized World Soil Database v1.2</li> <li>Wieder et al, 2013, Nature Climate Change;</li> <li>Oertel et al., 2016, doi:10.1016/j.chemer.2016.04.002</li> <li>Anan et al., 2013, nan et al., 2013, Todd-Brown et al., 2014, doi:10.5194/bg-11-2341-2014</li> <li>Todd-Brown et al., 2014, doi:10.5194/bg-11-2341-2014</li> </ul>				

## 10. ANTHROPOGENETIC

### 10.1 Anthropogenic Greenhouse Gas fluxes

#### 10.1.1 ECV Product: High-resolution footprint around point sources

Name	High-resolution footprint around point sources				
Definition	Spatially resolved GHG emission plume around local source				
Unit	kg CO <sub>2</sub> /m <sup>2</sup> /s				
Note					
Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km	distance	G	1	
			B		
			T	2	
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	time	Repeat time of observations	G	4 hours	IPCC 2019 Refinement
			B		
			T	6 days	
Timeliness	time		G	Within one week	
			B		
			T	Within one month	
Required Measurement Uncertainty (2-sigma)		Twice the estimated standard deviation of the total	G	1 ppm	IPCC 2006 GL
			B		
			T	5 ppm	IPCC 2006 GL
Stability			G		IPCC 2006 GL
			B		
			T		IPCC 2006 GL
Standards and References	ESA Mission requirements document of CarbonSat, of CO <sub>2</sub> Sentinel 7				

### 10.1.2 ECV Product: Total Estimated fluxes by coupled data assimilation/ models with observed atmospheric – national

<b>Name</b>	<b>Estimated fluxes by coupled data assimilation/ models with observed atmospheric – national</b>				
<b>Definition</b>	National estimates derived from highly resolved GHG emission gridmaps (modelled output, using proxy for the spatial distribution at fine-scale resolution)				
<b>Unit</b>	kg CO <sub>2</sub> eq /m <sup>2</sup> /s				
<b>Note</b>	Total estimated fluxes by coupled data assimilation/ inverse models at a national scale. This includes both “anthropogenic” and “natural” emissions and removals.				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	km	Size of country	G	10	
			B		
			T	100	
<b>Vertical Resolution</b>	Four Layers	1) surface, 2) stack height (between 100m and 300m), 3) cruise height (10km) and 4) supersonic height (15 km)	G		
			B		
			T		
<b>Temporal Resolution</b>	time	time	G	Annual	IPCC 2019, UNFCCC Inventory Guidelines
			B		
			T	Annual	IPCC 2019, UNFCCC Inventory Guidelines
<b>Timeliness</b>	time	time	G	WITHIN ONE 1.25 YEARS	To allow comparison with estimates made following the UNFCCC Inventory Reporting Guidelines
			B		
			T	WITHIN ONE 1.25 YEARS	To allow comparison with estimates made following the UNFCCC Inventory Reporting Guidelines
<b>Required Measurement Uncertainty (2-sigma)</b>		Twice the estimated standard deviation of the total as a % of the total	G	10%	IPCC 2019
			B		
			T	30%	IPCC 2019
<b>Stability</b>			G		IPCC 2019
			B		
			T		IPCC 2019
<b>Standards and References</b>	<ul style="list-style-type: none"> <li>IPCC 2019 refinement <a href="https://www.ipcc-nggip.iges.or.jp/public/2019rf/index.html">https://www.ipcc-nggip.iges.or.jp/public/2019rf/index.html</a> Volume I, Chapter 6.10.2 Comparisons with atmospheric measurements</li> <li>GAW Report No. 245, An Integrated Global Greenhouse Gas Information System (IG3IS) Science Implementation Plan</li> </ul>				



### 10.1.3 ECV Product: Total Estimated fluxes by coupled data assimilation/ models with observed atmospheric - continental

Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	km	Size of continents	G	1000	
			B		
			T	10000	
Vertical Resolution	N/A		G		
			B		
			T		
Temporal Resolution	time	time	G	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines
			B		
			T	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines
Timeliness	time	time	G	WITHIN ONE 1.25 YEARS	To allow comparison with estimates made following the UNFCCC Inventory Reporting Guidelines
			B		
			T	WITHIN ONE 1.25 YEARS	To allow comparison with estimates made following the UNFCCC Inventory Reporting Guidelines
Required Measurement Uncertainty (2-sigma)	%	Twice the estimated standard deviation of the total as a % of the total	G	10%	IPCC 2019
			B		
			T	25%	IPCC 2019
Stability			G		IPCC 2019
			B		
			T		IPCC 2019
Standards and References	<ul style="list-style-type: none"> <li>IPCC 2019 refinement <a href="https://www.ipcc-nggip.iges.or.jp/public/2019rf/index.html">https://www.ipcc-nggip.iges.or.jp/public/2019rf/index.html</a> Volume I, Chapter 6.10.2 Comparisons with atmospheric measurements</li> <li>GAW Report No. 245, An Integrated Global Greenhouse Gas Information System (IG3IS) Science Implementation Plan</li> </ul>				

### 10.1.4 ECV Product: Anthropogenic F-gas emissions from industrial processes and product use

Name						F-gas emissions from industrial processes and product use					
Definition						F-Gas emissions are anthropogenic and mainly originating from chemical industrial processes and F-gas-related product use. The different F-gases have different, all very high global warming potentials.					
Unit						ton CO <sub>2</sub> eq /yr for the region					
Note						This corresponds to UNFCCC reporting of anthropogenic emissions of fluorinated gases (HFC, PFC and SF <sub>6</sub> ) aggregated according to the GWP as agreed by the UNFCCC					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	Nation	Country by country	G	By country and sector	IPCC 2006 GL, UNFCCC Inventory Guidelines						
			B								
			T	By country and sector	IPCC 2006 GL, UNFCCC Inventory Guidelines						
Vertical Resolution	N/A	Not relevant	G								
			B								
			T								
Temporal Resolution	time	time	G	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines						
			B								
			T	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines						
Timeliness	time	time	G	WITHIN ONE 1.25 YEARS	UNFCCC Inventory Reporting Guidelines						
			B								
			T	WITHIN ONE 1.25 YEARS	UNFCCC Inventory Reporting Guidelines						
Required Measurement Uncertainty (2-sigma)	%	Twice the estimated standard deviation of the total as a % of the total	G	10%	IPCC 2006 GL						
			B								
			T	50%	IPCC 2006 GL						
Stability		Follow times series consistency in 2006 GLs and 2019 Refinement	G		IPCC 2006 GL						
			B								
			T		IPCC 2006 GL						
Standards and References						<ul style="list-style-type: none"> <li>IPCC 2006 GL (Optional: 2019 Refinement of the GL; National inventory reports to UNFCCC)</li> </ul>					

### 10.1.5 ECV Product: Anthropogenic N<sub>2</sub>O emissions from fossil fuel use, industry, agriculture, waste and products use, indirect from n-related emissions/ depositions

<b>Name</b>	N <sub>2</sub> O emissions from fossil fuel use, industry, agriculture, waste and products use, indirect from n-related emissions/ depositions				
<b>Definition</b>	Anthropogenic N <sub>2</sub> O emissions are mainly originating from fuel combustion, industry, agriculture, waste, products use (including indirect emissions from leaching and run-off, from NO <sub>x</sub> emissions)				
<b>Unit</b>	ton N <sub>2</sub> O /yr for the region				
<b>Note</b>	This corresponds to UNFCCC reporting of anthropogenic emissions of nitrous oxide				
<b>Requirements</b>					
<b>Item needed</b>	<b>Unit</b>	<b>Metric</b>	<b>[1]</b>	<b>Value</b>	<b>Derivation, References and Standards</b>
<b>Horizontal Resolution</b>	Nation	Country by country	G	By country and sector	IPCC 2006 GL, UNFCCC Inventory Guidelines
			B		
			T	By country and sector	IPCC 2006 GL, UNFCCC Inventory Guidelines
<b>Vertical Resolution</b>	N/A	Not relevant	G		
			B		
			T		
<b>Temporal Resolution</b>	time	time	G	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines
			B		
			T	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines
<b>Timeliness</b>	time	time	G	WITHIN ONE 1.25 YEARS	UNFCCC Inventory Reporting Guidelines
			B		
			T	WITHIN ONE 1.25 YEARS	UNFCCC Inventory Reporting Guidelines
<b>Required Measurement Uncertainty (2-sigma)</b>	%	Twice the estimated standard deviation of the total as a % of the total	G	40%	IPCC 2006 GL
			B		
			T	80%	IPCC 2006 GL
<b>Stability</b>		Follow times series consistency in 2006 GLs and 2019 Refinement	G		IPCC 2006 GL
			B		
			T		IPCC 2006 GL
<b>Standards and References</b>	<ul style="list-style-type: none"> <li>IPCC 2006 GL (Optional: 2019 Refinement of the GL; National inventory reports to UNFCCC)</li> </ul>				

### 10.1.6 ECV Product: Anthropogenic CH<sub>4</sub> emissions from fossil fuel, waste, agriculture, industrial processes and fuel use

Requirements					
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards
Horizontal Resolution	Nation	Country by country	G	By country and sector	IPCC 2006 GL, UNFCCC Inventory Guidelines
			B		
			T	By country and sector	IPCC 2006 GL, UNFCCC Inventory Guidelines
Vertical Resolution	N/A	Not relevant	G		
			B		
			T		
Temporal Resolution	time	time	G	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines
			B		
			T	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines
Timeliness	time	time	G	WITHIN ONE 1.25 YEARS	UNFCCC Inventory Reporting Guidelines
			B		
			T	WITHIN ONE 1.25 YEARS	UNFCCC Inventory Reporting Guidelines
Required Measurement Uncertainty (2-sigma)	%	Twice the estimated standard deviation of the total as a % of the total	G	20%	IPCC 2006 GL
			B		
			T	40%	IPCC 2006 GL
Stability		Follow times series consistency in 2006 GLs and 2019 Refinement	G		IPCC 2006 GL
			B		
			T		IPCC 2006 GL
Standards and References	<ul style="list-style-type: none"> <li>IPCC 2006 GL (Optional: 2019 Refinement of the GL; National inventory reports to UNFCCC)</li> </ul>				

### 10.1.7 ECV Product: Anthropogenic CO<sub>2</sub> emissions/ removals by land categories

Name						CO <sub>2</sub> emissions/ removals by land categories					
Definition		Short and long cycle C emissions from land use, land-use and forestry (including carbon stock gains and losses of biomass burning, disease, harvest, net deforestation)									
Unit		ton CO <sub>2</sub> /yr for the region									
Note		This corresponds to UNFCCC reporting of anthropogenic emissions and removals from LULUCF									
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	NONE – BY COUNTRY	As defined by UNFCCC	G	By country/region	IPCC 2006 GL, UNFCCC Inventory Guidelines						
			B								
			T	By country/region	IPCC 2006 GL, UNFCCC Inventory Guidelines						
Vertical Resolution	N/A		G		Not relevant						
			B								
			T		Not relevant						
Temporal Resolution	time	time	G	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines						
			B								
			T	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines						
Timeliness	time	time	G	WITHIN ONE 1.25 YEARS	UNFCCC Inventory Reporting Guidelines						
			B								
			T	WITHIN ONE 1.25 YEARS	UNFCCC Inventory Reporting Guidelines						
Required Measurement Uncertainty (2-sigma)	% or kT	Twice the estimated standard deviation of the total as a % of the total <b>or</b> mass of CO <sub>2</sub>	G	15% or 300kT – whichever is largest	IPCC 2006 GL						
			B								
			T	20% or 400kT – whichever is largest.	IPCC 2006 GL						
Stability			G		IPCC 2006 GL						
			B								
			T		IPCC 2006 GL						
Standards and References	<ul style="list-style-type: none"> <li>IPCC 2003 GPG, IPCC 2006 GL;</li> <li>UNFCCC National Inventory Reports</li> </ul>										

### 10.1.8 ECV Product: Anthropogenic CO<sub>2</sub> emissions from fossil fuel use, industry, agriculture, waste and products use

Name						CO <sub>2</sub> emissions from fossil fuel use, industry, agriculture, waste and products use					
Definition						Anthropogenic long-cycle C emissions are mainly originating from combustion of fossil fuels, and for about 10% also from non-combustion sources, such as cement production, ferrous and non-ferrous metal production processes, urea production, agricultural liming and solvent use.					
Unit						ton CO <sub>2</sub> /yr for the region					
Note						This corresponds to UNFCCC reporting of anthropogenic emissions from non-LULUCF sources by country					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution	NONE – BY COUNTRY	As defined by UNFCCC	G	By country and sector	IPCC 2006 GL, UNFCCC Inventory Guidelines						
			B								
			T	By country and sector	IPCC 2006 GL, UNFCCC Inventory Guidelines						
Vertical Resolution	N/A		G	N/A	NOT RELAVENT						
			B								
			T	N/A	NOT RELAVENT						
Temporal Resolution	Time - years		G	ANNUAL	IPCC 2006 GL, UNFCCC Inventory Guidelines						
			B								
			T	Annual	IPCC 2006 GL, UNFCCC Inventory Guidelines						
Timeliness	Time - years		G	WITHIN 1.25 YEARS	UNFCCC Inventory Reporting Guidelines						
			B								
			T	WITHIN 1.25 YEARS	UNFCCC Inventory Reporting Guidelines						
Required Measurement Uncertainty (2-sigma)	%	Twice the estimated standard deviation of the total as a % of the total	G	Globally: 5% Nationally: 10%	IPCC 2006 GL						
			B								
			T	Globally: 10% Nationally: 30%	IPCC 2006 GL						
Stability		Follow times series consistency in 2006 GLs and 2019 Refinement	G		IPCC 2006 GL						
			B								
			T		IPCC 2006 GL						
Standards and References	IPCC 2006 GL (Optional: 2019 Refinement of the GL; National inventory reports to UNFCCC)										

## 10.2 Anthropogenic water use

### 10.2.1 ECV Product: Anthropogenic water use

Name						Anthropogenic Water Use					
Definition						Volume of water used by country, by sector – agricultural, industrial and domestic.					
Unit						Volume of water used by country. 10 <sup>9</sup> m <sup>3</sup> /year					
Note						AQUASTAT contains estimates of water use by county.					
Requirements											
Item needed	Unit	Metric	[1]	Value	Derivation, References and Standards						
Horizontal Resolution		By county	G	medium-scale watersheds							
			B	Country, plus major watersheds							
			T	country							
Vertical Resolution	N/A		G								
			B								
			T								
Temporal Resolution	time	Year, annual data	G	monthly							
			B								
			T	1							
Timeliness			G								
			B								
			T								
Required Measurement Uncertainty (2-sigma)	%	2 standard deviations	G	10							
			B								
			T	20							
Stability			G								
			B								
			T								
Standards and References											

**GCOS Secretariat**  
**Global Climate Observing System**  
**c/o World Meteorological Organization**  
**7 bis, Avenue de la Paix**  
**P.O. Box No. 2300**  
**CH-1211 Geneva 2, Switzerland**  
**Tel: +41 22 730 8067**  
**Fax: +41 22 730 8181**  
**Email: [gcos@wmo.int](mailto:gcos@wmo.int)**